

China**Zhejiang CHINT Electrics Co., Ltd.**

Address: A3 Building, No. 3655 Sixian Road, Songjiang 201614, P.R.China

Tel: +86-21-67777706

Fax: +86-21-67777777-88225

Email: Global-Sales@CHINTGlobal.com

Web: www.CHINTGlobal.com

Singapore | APAC HQ**CHINT Global International Pte Ltd**

Address: 8 Kallang Avenue, #04-06/09 Aperia Office Tower 1, Singapore 339509

Tel: +65 6329 3110

Fax: +65 6329 3159

Email: Sales.APAC@CHINT.com

Web: www.CHINTGlobal.com

Sunlight Electrical Pte Ltd

Address: 1 Third Chin Bee Road, Singapore 618679

Tel: +65 6741 9055

Fax: +65 6265 4586

Email: Sales@SunlightGroup.com

Web: www.SunlightGroup.com

Cambodia**CHINT (Cambodia) Power Equipment Co., Ltd**

Address: No.15, St. 542, Sangkat Boeung Kok 1, Khan Toul Kork, Phnom Penh, Cambodia

Tel: +855 23 231 077

Email: lbin3@CHINTGlobal.com

Web: www.CHINTGlobal.com

SchneiTec CHINT Co., Ltd

Address: Ansor Kdam Village, Sna Ansa Commune, Krakor District, Pursat Province, Cambodia

Tel: +855 09 5353 268

Email: Liubin@SchneiTec-CHINT.com.kh /

Info@SchneiTec-CHINT.com.kh

Web: www.SchneiTec-CHINT.com.kh

India**CHINT India Energy Solution Private Limited**

Address: Discovery Tower Plot No A-17, Ground Floor, Sector – 62 Noida – 201309

Tel: +91 1202 9750 57

Email: Marketing@CHINT.co.in

Web: www.CHINT.co.in

Indonesia**PT. CHINT Indonesia**

Address: Gold Coast Office, Eiffel Tower, Jl. Pantai Indah Kapuk, RT.7/RW.2, Kamal Muara, Kec. Penjaringan, Jkt Utara, Daerah Khusus Ibukota Jakarta 14470, Indonesia

Tel: +62 21 5436 3000

Email: Sales@CHINT-Indonesia.com

Web: www.CHINT-Indonesia.com

Korea**CHINT Electric Korea Co.,LTD**

Address: B501, 40, Imiro, Uiwang-Si, Gyeonggi-Do, Korea 16006

Tel: +82 31 8068 7099

Email: cek-admin@CHINT.com

Web: www.CHINTGlobal.kr

Malaysia**Alpha Automation (Selangor) Sdn. Bhd.**

Address: No. 11, Temasya 18, Jalan Pelukis U1/46B, Seksyen U1, 40150 Shah Alam, Selangor, Malaysia

Tel: +603-5569 7787

Fax: +603-5569 9295

Email: CHINTMalaysia@AlphaSel.com

Web: www.AlphaSel.com

Philippines**CHINT Electric Co., Ltd**

Address: Unit 201, Taipan Place, F. Ortigas Jr. Road, Ortigas Center, Pasig City, Metro Manila, Philippines

Tel: +63 (02) 836 53068

Email: chintph@chintglobal.com

Web: www.CHINTGlobal.com

Vietnam**CHINT Vietnam Holding Co., Ltd**

Address: So 2Bis-4-6, Le Thanh Ton, P. Ben Nghe Quan 1, Ho Chi Minh, Vietnam

Tel: +84 0283 8270 015

Email: Marketing.VN@CHINTGlobal.com

Web: www.CHINTGlobal.vn

Sunlight Electrical (VN) Co., Ltd

Address: 20 Doc Lap Ave, VSIP, Thuan An City, Binh Duong Province, Vietnam

Tel: +84 0274 3743 505

Email: Sales.Sev@SunlightGroup-VN.com.vn

Web: www.SunlightVietnam.com.vn

**ALPHA AUTOMATION (SELANGOR) SDN. BHD.**

No. 11, Temasya 18, Jalan Pelukis U1/46B, Seksyen U1, 40150 Shah Alam, Selangor, Malaysia

Tel: +603-5569 7787

Email: CHINTMalaysia@AlphaSel.com

Web: www.AlphaSel.com

Power Up Your Journey Anywhere



PORTABLE ENERGY STORAGE

PES-600
PES-1200





The Portable Energy Storage (PES) offers a high level of safety and reliability, featuring multiple ports and both AC and DC output functions. This allows it to cater to the power needs of various scenarios. It is safe, convenient and supports fast charging through both AC and photovoltaic (PV) dual ports.

Global Certification



Applications



PES-600

Functions



iPhone
13 Por
11.97Wh
33 times



MacBook Air
49.9Wh
8 times



Switch
16Wh
25 times




Camera
7.7Wh
52 times



Fan
40W
10+ hours



Projector
65W
6+ hours



Mavic Air
40.42Wh
10 times



Smart Speaker
11.97W
33+ hours



DC Lamp
40W
10+ hours



Car Refrigerator
60W
6+ hours



Charger
40W
10+ hours



TV
110W
3+ hours



Rice Cooker
40W
10+ hours



Kettle
500W
0.8 hours



Electrical Tools
450W
0.9 hours



Ventilator
90W
4+ hours

Simultaneous Power Supply for 9 Devices

Front



Top



LED Display
PD Fast Charge: 100W
QC3.0 Output: 18W
USB*2 Total Output Power 24W
Car Charger +5525*2 Total Output 13.6V/10A/136W
AC Output*2: Total Output Power 600W


Wireless Charging: 10W

Key Features



Product Parameters

Power	600W	Battery Capacity	448WH (LiFePO4 battery)
Inverter	Pure sine wave	Fully Charge Time	Approx 3 hrs (65W adapter + 100W Type-C)
DC Output	5525*2/Car Charging 13.6V - 10A Total 136W max	Weight	5.6kg
Wireless Charger	10W	Power Display	LCD display
Cycle Time	3000 times	Product Size	306×171×202mm
AC Output	110V/60Hz, 220V/50Hz Power Rating 600W (peak 1200W)		
Charge Method	Adapter/ Solar Panel/ Car Charger/ Type-C		
Type-C Output	5V~20V = 3~5A MAX PD100W		
LED Light	SOS, lighting (3 levels), warning		
Accessories	Power adapter + car charger cable (optional) + user manual + accessories		

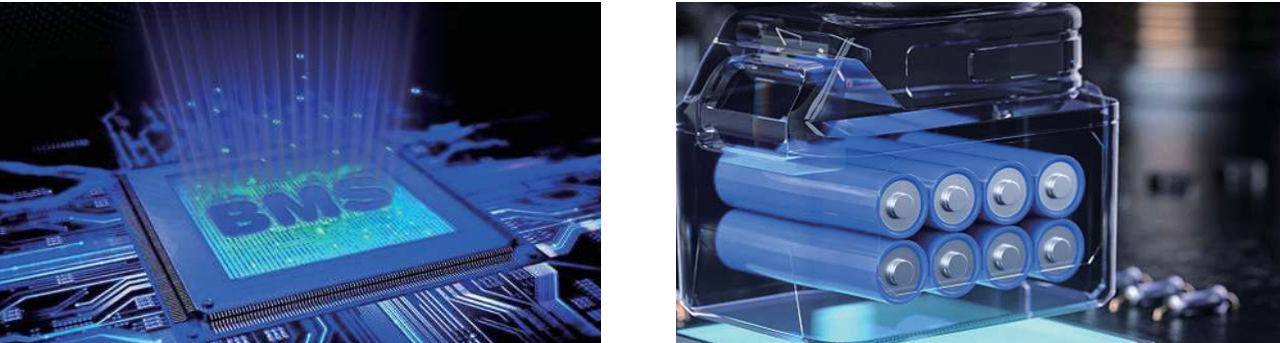

Dimensional Drawing



PES-1200

Functions



Drone
40W
22 times



Projector
65W
13+hours



Laptop
60Wh
15 times



Camera
16Wh
56 times



Fan
40W
22+hours



Smart Speaker
10W
90+hours



Mini Refrigerator
60W
15+hours



Refrigerator
120W
7+hours



LED Lights
10W
90+hours



Ventilator
40W
22+hours



TV
110W
8+hours



Electrical Tools
450W
2+hours



Rice Cooker
1000W
0.9+hours



Kettle
500W
1.8hours




Coffee Machine
1000W
0.9+hours



Electric Fan
31W
29+hours

Simultaneous Power Supply for 9 Devices

Front

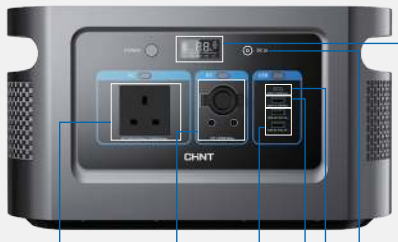

LED Display

DC input

PD fast charge: 100W

QC3.0 output: 18W

USB*2: total output power 24W

Car charger +5525*2 Total output 13.6V/10A/136W


AC output*

Top



Wireless charging*2: 10W


Key Features

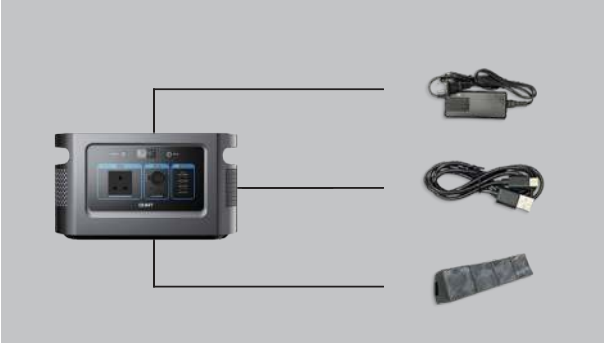

Product Parameters

Power	1200W	Battery Capacity	1008WH (LiFePO4 battery)
Inverter	Pure sine wave	Fully Charge Time	Approx 4 hrs (180W adapter + 100W Type-C)
DC Output	5525*2/Car Charging 13.6V-10A Total 136W max	Weight	11kg
Wireless Charger	10W * 2	Power Display	LCD display
Cycle Time	3000 times	Product Size	413×203×232mm
AC Output	110V/60Hz, 220V/50Hz Power Rating 1200W (peak 2400W)		
Charge Method	Adapter/ Solar Panel/ Car Charger/ Type-C		
Type-C Output	5V~20V = 3~5A MAX PD100W		
LED Light	SOS, lighting (3 levels of brightness), alarm		
Accessories	Power supply + adapter + manual + accessory bag (optional car charger data cable)		


Dimensional Drawing

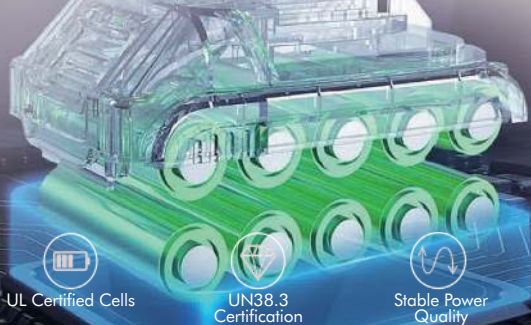

UL Certified Cells

UN38.3 Certification

Stable Power Quality

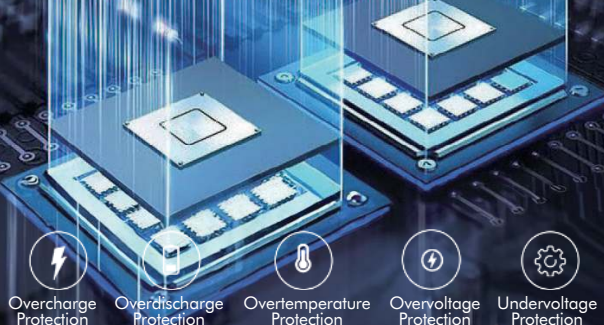

Overcharge Protection

Overdischarge Protection

Overtemperature Protection

Overvoltage Protection

Undervoltage Protection



413mm



203mm

232mm