

D.3 NXA Air Circuit Breaker

1. Circuit breaker general description

2. Technical Data

3. Intelligent controller

4. Accessories

5. Capacity derating and power loss

6. Dimension of busbar

7. Selective protection between MVSM and NXA

8. Dimensions and installation


9. Secondary circuit wiring

10. NXA Product Selection Table

11. NXA SKU List



Circuit breaker general description

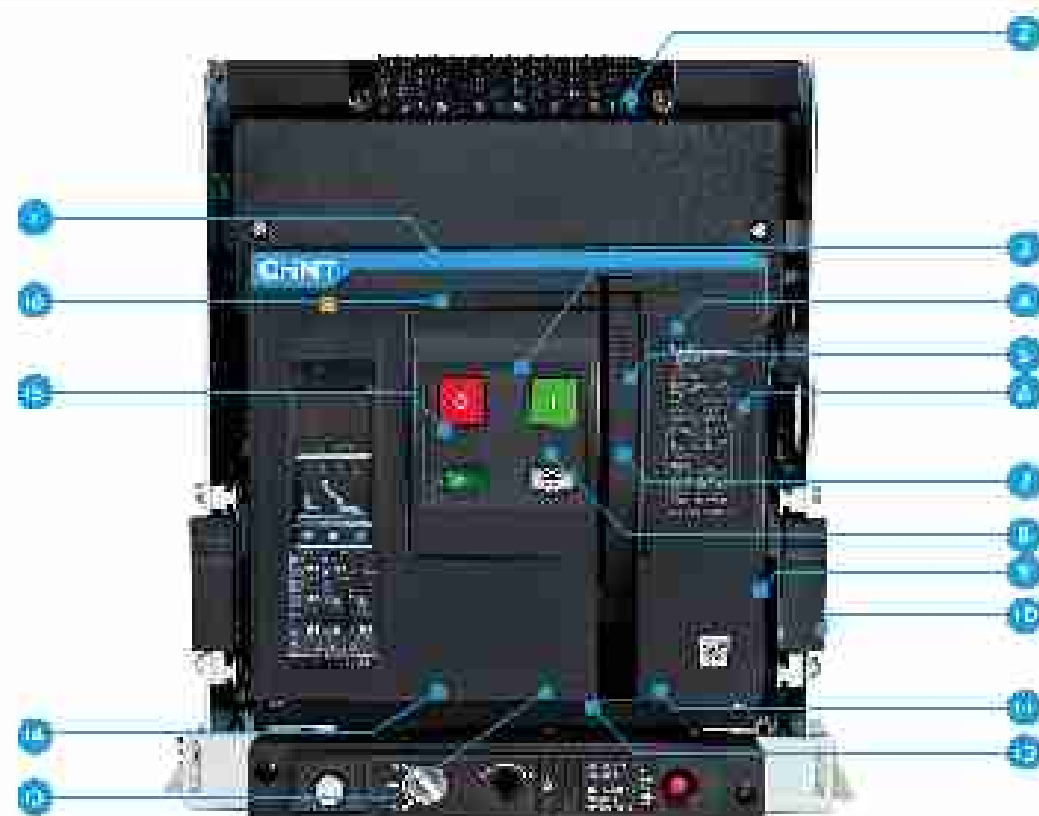

1 Trackwork	9 QR code
2 Secondary wiring terminal	10 Extraction door plate (only applicable to draw-out type)
3 Breaking button	11 "Unlocked" position lock (only applicable to draw-out type)
4 Energy-storage handle	12 Locking-handle entry (only applicable to draw-out type)
5 Making button	13 Position indicator (only applicable to draw-out type)
6 Nameplate	14 Locking-handle storage (only applicable to draw-out type)
7 Energy-storage/release indicator	15 Intelligent controller
8 Breaking/making indicator	16 Fault-breaking indicator next button


Structural features of the circuit breaker





Circuit Breaker

- Frame (break): 1600, 2000, 3200, 4000, 6300
- Breaking capacity: MVA
- Rated operational voltage (AC): 30 kV/60 kV/72 kV/85 kV/120 kV
- Number of poles: 3P, 4P
- Installation method: draw-curtains, fixed type



Operation conditions and environment adaptability

- Operation temperature:
 - The electrical and mechanical characteristics are applicable to the ambient temperature of $-40^{\circ}\text{C} \sim +50^{\circ}\text{C}$. NVA can also operate in the ambient temperature of $-25^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (in open air type), $-30^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (in open air type, CE-III), the detailed remarks can be found in P-23-24.
- Storage conditions: apply to $-45^{\circ}\text{C} \sim +70^{\circ}\text{C}$
- NVA can resist the following electromagnetic interference:
 - Overvoltage generated by electromagnetic interference
 - Overvoltage caused by external electromagnetic wave and power disturbing source
 - Electromagnetic discharge (radio waves, radio, infrared and the like)
- NVA has also fully passed the electrostatic discharge (ESD) test according to the following standards (IEC): IEC/EN 60941-2:
 - Annex I
 - The test can guarantee the safe lifting and the interference on lifting drive
- Protection grade:
 - Front IP 20, other side IP 00

Connection

- Rear connection:
 - Horizontal connection, vertical connection
- Optional accessories:
 - Interphase timer

Lock

- Padlocks of "locking" and "breaking" push button
- Padlock padlock (locking the circuit breaker in disarmed position)
- Check padlock
- Door interlock: the circuit breaker is arranged on the non-vented air chamber so as to prohibit to open the door.

Indication in contact

- Standard contents:
 - Working and breaking indication content
 - Bulk tripping indication content
- Optional accessories:
 - Position indication content
 - Spring charged indication content



Drawout type breaker



Drawer unit



Body



Drawout type breaker

Fixed type breaker



NVA-M



NVA-M+NVA-M

Notes: NVA-M Fixed type breaker is used in P-45

Accessories



Interphase timer



Secondary wiring terminal (drawout type)



Secondary wiring terminal (fixed type)



N pole CT



Counter



NVA-M

Model definition and description-intelligent controller

Frame size	Rated current breaking capacity	400	450	500	1400	1600	2000	2500	3200	4000	5000	6300	8000	10000
1000A	H	■	■	■	■	■	■							
	E	■	■	■	■	■	■							
2000A	H	■	■	■	■	■	■	■						
	E		■	■	■	■	■	■						
3000A	H		■	■	■	■	■	■	■					
	E					■	■	■	■					
4000A	H						■	■	■					
	E							■	■	■				
6300A	H								■	■	■			
	E									■	■	■		
8000A	H										■	■	■	
	E											■	■	■

Model definition and description

ACB	10	M	04	08		D	3	AC300	M	Other
Code of product	Code of frame size	Code of breaking capacity	Code of rated current	Code of intelligent controller		Code of installation method	Code of number of poles	Code of rated drive voltage	Code of separation mode	Code of special requirement
	10/1000A (04-10)	10 basic type	04-400A 04-600A 04-800A	AC basic type AC current type		D drive-out type	3 poles	AC300 AC 300V	No roller separation	No roller special requirement
	20/2000A (04-20)	E standard type	10-1000A 10-1200A 10-1400A	P power type H homopolar type		P fixed type	4 poles	AC 400V AC 400V	Is roller separation	Special requirements code, such as LVT
	25/2500A (10-25)	10 universal type	20-2000A 20-2200A 20-2400A					DC 150V DC 180V		
	40/4000A (02-40)		30-3000A 30-3400A 30-3800A					DC 250V DC 300V		
	63/6300A (02-63)		40-4000A 40-4500A							

Note 1) Intelligent controller PT-D-T type. The basic functions are the same with P-T type. T refers to the internal reorganization and separation function.

2) Manual operation does not control motor-driven mechanism, including electromagnetic and spring release. Manual operation controls all standard synchronous drive air operation.

3) Available working voltage of the intelligent controller corresponding power module is required P-DC250V or DC110V is selected.

4) 1000A (04-03)-4000A (02-25) have three 1400A, 1600A, 2000A breaking capacity, rated current is 1400A, 1600A intelligent controller, drive-out type and 3 poles; normal voltage is DC 250V manual operation.

Model definition and description-accessories

ACB	10	04	20/25/40/63
Code of product	Frame size	Code of accessories	Code of rated voltage
	10/1000A	02 Coiled electromagnet	20/25/40/63 AC250V
	20/2000A	3T Shunt tripper	40/63 AC400V
	40/4000A	M2 Motor	110VDC DC110V
	63/6300A	UNT Undervoltage tripper	220VDC DC220V
	20/40/2000A-4000A	ASUNT Self-energizing undervoltage tripper	Rated voltage-delay time (1s, 3s, 5s, 7s)
	20/30/2000A-2000A	LVT/LVT delay unit	
	20/30/2000A-4000A	ASLVT/ASLVT delay unit	

Model definition and description-accessories

ACB	10	04	04
Code of product	Frame size	Code of accessories	Specification of accessories
	10/1000A		04: Four groups of contacts
	20/2000A		05: Five groups of contacts
	30/3000A		06: Six groups of contacts
	40/4000A	07 Auxiliary contact	10: Three normally open and three normally closed
	63/6300A		14: Four normally open and four normally closed
	20/40/2000A-4000A		18: Five normally open and five normally closed
	20/30/2000A-2000A		
	20/30/2000A-4000A		
		KL Key lock	1515: One lock and one key
			2515: Two locks and one key
			3525: Three locks and two keys
		FCDP: Fixed type door frame	
		DCDP: Drive-out type door frame	
		FD: Fixed type interphase partition	
		DD: Drive-out type interphase partition	
		02-03-07: Position signal	
		EL2: Mechanical interlocking two interlocking steel cables	
		M-3: Triple mechanical interlock (3-on-1-off)	
		M-4: Triple mechanical interlock (1-on-2-off)	

Technical Data

Number of poles	3M 6000A only 3P	
Rated operational voltage (kV)	AC 690/726/765 , AC 1440/1500/1600	
Rated insulation voltage (kV)	1000	
Rated impulse withstand voltage (kV)	12	
Rated frequency (Hz)	50/60	
Flushing distance (mm)	0	
Applicable to isolation	EX2M EX2M-2	Applicable
Flushing grade	SC 0000-1	Nil

Frame size			1000A						2500A						4000A				6000A				
Rated current (kA)			400	600	800	1000	1200	1600	250	300	360	1200	1600	2000	1000	1600	2000	2500	3200	3600	4000	4500	
Rated current of the fourth pole (kA)			400	600	800	1000	1200	1600	250	300	360	1200	1600	2000	1000	1600	2000	2500	3200	3600	4000	-	
Type of the circuit breaker			II	II	II				II	II	II				II	II	II		II	II	II	II	
Rated ultimate short-circuit breaking capacity (kA rms) VMC 50/60Hz	Icu	200/400/600V	30	42	52				70	85	100				30	40	50		30	40	50	120	
		110/220/380V	20	28	36				52	58	65				45	70	70		45	70	70	80	
Rated service short-circuit breaking capacity (kA rms) VMC 50/60Hz	Ics	200/400/600V	42	42	50				50	50	60				30	30	35		30	35	35	100	
		110/220/380V	20	26	30				30	30	35				25	25	25		25	25	25	25	
Utilization category			II						II						II				II			II	
Rated short-time withstand current (kA rms) VMC 50/60Hz	Ist 1s	200/400/600V	42	42	42				30	30	35				35	35	35		35	35	35	100	
		110/220/380V	20	26	30				20	20	25				25	25	25		25	25	25	25	
	Ist 3s	200/400/600V	20	20	20				20	20	20				20	20	20		20	20	20	-	
		110/220/380V	-	-	-				-	-	-				-	-	-		-	-	-	-	
Closed capacity (kA peak) VMC 50/60Hz	Ics	200/400/600V	100	100	100				170	170	170				170	170	170		170	170	170	240	
		110/220/380V	40	70	70				100	100	100				100	100	100		100	100	100	100	
Making current (kA peak) (without preinsertion function) (VMC 50/60Hz)			10	10	10				10	10	10				10	10	10		10	10	10		
Breaking time (ms)			20						20						20				20			20	
Closing time (ms)			70						70						70				70			70	
Installation dimensions and service life																							
Service life C/O cycle	Mechanical	Without maintenance	10000						10000						10000				10000				
	Electrical	Without maintenance	8000						8000						7000				8000				
Connection	Mechanical	Without maintenance	-						-						-				-				
	Real type	3P	270x240,5x100,5						274x240x100						250x270,5x100				270x270,5x100				
Size (width x depth x height)		4P	320x240,5x100,5						325x240x100						300x270,5x100				300x270,5x100				
	Draw-out type	3P	300x270,5x100						300x270x100						300x270x100				300x270x100				
		4P	370x270,5x100						370x270x100						370x270x100				370x270x100				



NVA-type intelligent controller

1. Display window: displays current value, setting parameter, fault current, trip time, etc.
2. 1 indicator: This light is on after ground fault trip.
3. 1 indicator: This light is on after overload long-delay trip.
4. 1 indicator: This light is on after short-circuit instantaneous trip.
5. 1 indicator: This light is on after short-circuit instantaneous trip.
6. 1 indicator: Query the DIP position and fault record.
7. 1 indicator: Switch is the reset case when querying the DIP position.
8. 1 indicator: Switch is the previous level, current.
9. Overload long-delay current multiple setting switch.
10. Short-circuit current delay time multiple setting switch.
11. Ground fault current multiple setting switch.
12. Overload long-delay time setting switch.
13. Break level.
14. Short-circuit current delay time setting switch.
15. Short-circuit instantaneous current multiple setting switch.
16. Short-circuit instantaneous current multiple setting switch.

Intelligent controller

NVA-type intelligent controller(basic protection)

Protection

The setting of all protection thresholds and DE switches for delay. The setting value can be displayed in the display window.

+ Overload protection

- Thermal runaway accumulation of heat in place and other tripping

+ Short-circuit protection

- Short delay (DE) and instantaneous protection
- Speed detection device (optional in terms of delay)

+ Ground fault protection

- Speed detection (optional in terms of delay)

+ Neutral line current protection

The neutral line protection threshold can be adjusted to 50%, 100% and off for 3P + N or 3P products (2.0A shell frame only 50%)

+ Trip function

Structure, 60 times current for over tripping

+ Trip reset function

On-site failure recovery function

+ Current

This NVA-type intelligent controller measures the true current rms between 10% and 120% within an accuracy of 2%

+ Operation direction and function

NVA-type intelligent controller (current type)


Protection

The setting of all protection thresholds and DE switches for delay. The setting value can be displayed in the display window.

In addition to the protection and extended functions of all 6-type control units, the 6-type control unit also includes:

+ Voltage imbalance protection

The tripping current phase failure or three-phase current imbalance can be protected.

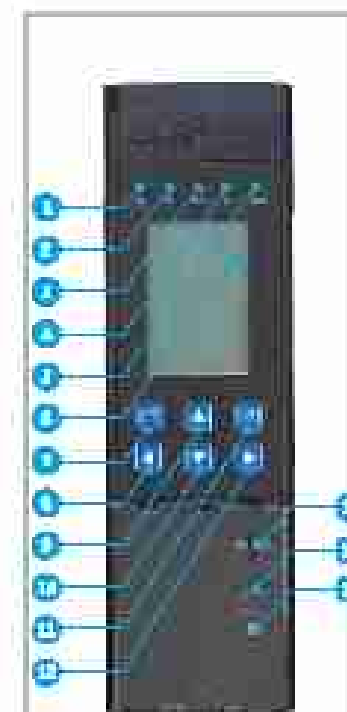

P-type intelligent controller

1. Display window: This light is on after ground fault trip.
2. 1 indicator: This light is on after overload long-delay trip.
3. 1 indicator: This light is on after short-circuit instantaneous trip.
4. 1 indicator: This light is on after short-circuit instantaneous trip.
5. Running indicator: This light is on during normal operation.
6. 1 indicator: Tri-color fault light, green during normal operation, yellow upon an alarm (analog over tripping).
7. 1 indicator: 1 indicator.
8. 1 indicator: 1 indicator.
9. 1 indicator: 1 indicator.
10. 1 indicator: 1 indicator.
11. 1 indicator: 1 indicator.
12. 1 indicator: 1 indicator.
13. 1 indicator: 1 indicator.
14. 1 indicator: 1 indicator.
15. 1 indicator: 1 indicator.
16. 1 indicator: 1 indicator.

P-type intelligent controller (power type)

Protection

The setting of all protection thresholds and buttons for delay

+ Include the protection thresholds of all 6-type control units

Ground current protection function region (equipped with dedicated external microcontroller and disconnection protection for power grounding protection)

+ Advanced protection function

- Voltage imbalance protection
- Overvoltage and undervoltage protection
- Over frequency and under frequency protection
- Phase sequence protection
- Reverse power protection function
- Regulated value protection function

The regulated value of the main 6-type control unit phase current is estimated from the current value, and the protection works when the regulated value exceeds the limit.

When the protection mode is on alarm, the action is in principle the same as the grounding alarm. The settings for the setting time window are in the two curves are the setting menu. The regulated value protection is set for each line.

Maximum regulated current value at phase A

Maximum regulated current value at phase B

Maximum regulated current value at phase C

Maximum regulated current value at phase D

(monitored by neutral line protection setting)

+ Extended functions


- Intelligent controller self-diagnosis
- Recording function of the numerical operation status and parameter display window
- providing the load record and load current record display function: The current load degree is recorded according to the mechanical life of the load and breaking capacity of the power source.
- Internal clock function
- Button Trip reset function

+ Electric energy meter

- Current measurement
- Voltage measurement
- Frequency measurement
- Regulated value measurement
- Power factor measurement (power factor)
- Electric energy (active, reactive power) measurement
- Power harmonic measurement

+ LED multi-color light

Green during normal operation, yellow upon an alarm, and red over tripping.

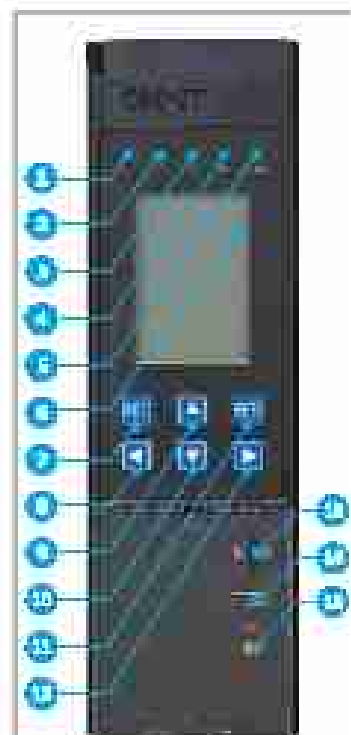

H-type intelligent controller

1. Ig indicator: This light is on after ground fault trip.
2. Ir indicator: This light is on after overload long delay trip.
3. Id indicator: This light is on after short-circuit short delay trip.
4. Ith indicator: This light is on after short-circuit long delay trip.
5. Running indicator: This light flashes during normal operation.
6. CB on indicator: When a circuit is closed, green during normal operation, yellow during on delay, and red after tripping.
7. Setting button
8. Off button
9. Stop button
10. Open button
11. Lock button
12. Right button
13. Back button
14. On button
15. Test button (light on)

H-type intelligent controller (harmonic type)

Function

The setting of all protection thresholds and human error delay.

- In addition to the protection and extended functions of all single control units, the H-type control unit also includes:
 - Load monitoring function
 - Phase-selective tripping
 - Communication function:
 - Modbus-RTU communication protocol
 - Input / output function:
 - DO: DO or +DO
 - DI signal: 0V / 24V-250V AC
 - DO negative power limit: 24VDC supply / load's resistance
 - Harmonic analysis function:
 - Measure the fundamental current, fundamental phase voltage, fundamental power and 1-31 odd-order harmonic current content (HRh), harmonic voltage content (VRh), root harmonic current distortion rate (THDi%), root harmonic voltage distortion rate (THV%), duty duty harmonic content (HR). (The ratio of the square root mean of the fifth harmonic component combined in the periodic AC amount to the square root mean of the fundamental component) expressed as a percentage).

Protection features

The protection features of the intelligent controller can give inverse time characteristics and selective time characteristics. When the fault current exceeds the set value of the inverse time limit, the controller performs cascade time protection. The inverse time limit corresponds to the feature curve D.

Overload long-time-delay protection feature

Overload long-time-delay protection action threshold value:

- $1.05I_n \leq I \leq 2I_n$ no action
- $1.2I_n \leq I \leq 1I_n$ action

1s current setting value range: 0.1In, 0.2In, 0.4In, 0.7In, 0.8In, 0.9In, 1.0In-OFF (In/0.01In) (1.0In-OFF/0.01In)

Inverse time delay function requires 12s, where n = 12H/1s

Setting Multiple of Current	Action Time							
1.0In	75	30	04	100	100	104	200	204
2In	0	10	10	10	100	104	100	100
3In	1	2	4	5	10	10	20	24

Notes: H — the multiple (H) obtained by dividing failure current by set current.

t — time delay action of the failure action

m — long-time-delay set value

Allowed error of the action time: $\pm 10\%$

Conventional failure rating: 10In

m = 2x50In

Short circuit short-time-delay protection feature

Short-circuit short-time-delay protection action threshold value:

- $< 0.005kA$ no action
- $> 1.15kA$ action

1s current setting value range: 20, 30, 40, 50, 60, 80, 100-OFF (In/0.01In) (20/0.01In-OFF/0.01In) (20/0.01In-OFF/0.01In)

Current	Action Time	Action Feature Pn (100Pn)	Remark
In/2In	Instant time limit	Setting time = 0.1, 0.2, 0.3, 0.4	B, H
		Setting time = 0.1, 0.2, 0.3, 0.4	
In/2In	Constant time limit	Minimum = 0.05, 0.10, 0.20, 0.30	B, A, B, H
		Minimum = 0.10, 0.20, 0.30, 0.40	
	Release time	0.05, 0.10, 0.20, 0.30	

Notes: t — short-time-delay by current set value

I — failure current value

Tn — long-time-delay set value

t — failure action time-delay time

m — characteristic delay inverse time delay set value

Possible error of action time: $\pm 10\%$

Conventional failure rating: 20In = 6250A

1s = 5000A = 6250A

m = 0In

Short circuit instantaneous protection features

Short circuit instantaneous protection action threshold value:

≤ 0.02s no action

> 1.1s tripping

The current setting value of instantaneous tripping: 2In, 4In, 6In, 8In, 10In, 12In, 13In - OFF (N0=0 means 0A, N0001 means 0.1A, In=0).

2In - 13In - OFF (N0=0 means 0A, N0001 means 0.1A)

None action time = 0s

Conventional time tripping (t): (2InIn = 0.00 - 50.00)

11-61.61In - 50.00)

Earth fault protection action features

Earth fault protection action threshold value:

≤ 0.1s no action

> 1.1s tripping

N/A

Current setting value	A	B	C	D	E	F	G	OFF
N0001, 20	0.2In	0.5In	0.8In	0.5In	0.2In	0.1In	In	
N0001, 40, 60	0.2A	0.5A	0.8A	0.5A	0.2A	0.1A	100A	
10In	Instantaneous tripping							
$I = \frac{(U_{ph})^2}{P} \times 100$								
N0001, 20: 0.2In-1.0In-OFF								
N0001, 40, 60: 0.00A-100A-OFF								
Current time limit	Setting time (s)	0.1	0.2	0.3	0.4	0.5	0.6	0.7
	Minimum (s)	0.05	0.1	0.15	0.2	0.25	0.3	0.35
	Maximum (s)	0.14	0.28	0.36	0.48	0.56	0.64	0.72
	Release time	0.05	0.14	0.14	0.25	0.25	0.35	0.35

Note: Ig = earth fault protection setting value. Default setting N001 (40/0.05) = 0.2A

When In = 12500 - Ig max = 120.00

100.00=0.05Ig = 0.005

I = failure current value

t = failure action time delay time

tg = working time delay time

The permitted error of the inverse time tripping is ±15%

Conventional time tripping OFF

Controller minimum display current

Phase	In	Minimum display value (A)
100	400-1000	50
200	100-1000	50
3000	51000	100

Note: Controller can work normally when single phase current less than 0.1In, three phase not less than 0.2In.

Intelligent Controller measurement accuracy

Current measurement	
Measuring range	0.1In and In, not less than 10A (breaker rated current)
Measurement accuracy	Not measure below 0.1In
	0 current: within linearly from -2% to 2% between 0.1In and 0.4In
	0 current: ±2% between 0.4In and 1.2In
	0 current: within linearly from -2% to 2% above 1.2In
	0 current: ±1.0% for ground current

Voltage measurement	
Measuring range	Line voltage: 0-600V
Measurement accuracy	Phase voltage: 0%-100%
	Tolerance: ±1%

Frequency	
Measuring range	45-745 Hz
Tolerance	Tolerance: ±0.1 Hz

Power	
Measurement method	Watts mode
Measurement content	3-phase total active power, total reactive power, total apparent power
	4-phase: split-phase active power, split-phase reactive power, split-phase apparent power, total active power, total reactive power, total apparent power
Measuring range	Active power: -12768W ~ 12768W
	Reactive power: -12768Var ~ 12768Var
	Apparent power: 0kVA ~ 65536VA
	Tolerance: ±2.5%

Power factor	
Measurement content	Total power factor, split-phase power factor
Measurement range	-1.00 ~ +1.00


Energy usage	
Measurement content	Input active energy (Qin), output active energy (Qout)
	Input reactive energy (Rin), output reactive energy (Rout)
	Total active energy (Qtotal), total reactive energy (Qtotal), total apparent energy (Qtotal)
Measuring range	Active energy: ±29967296 kWh
	Reactive energy: ±29967296 kVarh
	Apparent energy: ±29967296 kVAh
Measurement accuracy	±2.5%

Harmonic measurement	
Fundamental measurement	Current (I _n)
Total harmonic distortion	Fundamental measurement voltage distortion (U _n)
	THD: total distortion rate of harmonic relative to fundamental wave
Amplitude spectrum of harmonic	THD: total distortion rate of harmonic relative to R _n
	The Controller can display the FFT amplitude of 3-11 odd-order harmonic, and display its percentage
Control unit measurement accuracy	±2%


When fault current is less than 10In or 1200A, the protection is defined by the delay time.

1. Schematic Diagram of description

Type-T

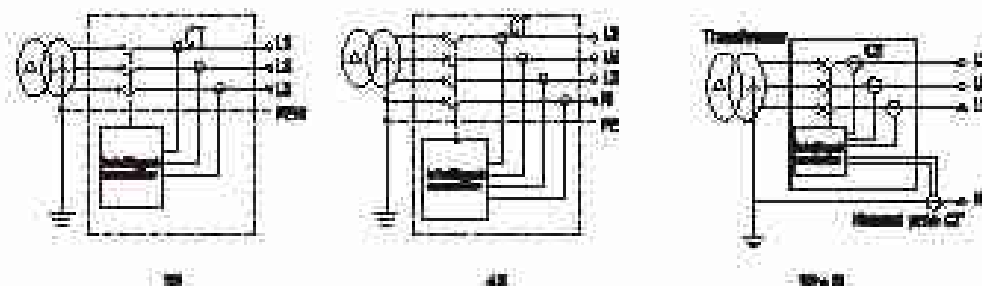

Type-R

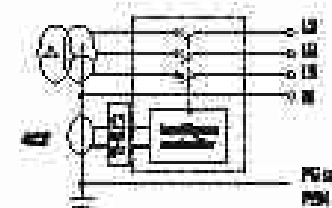

ACB used special transformer CTs-Special current transformer module

Leakage protection (R)

Leakage protection applies to leakage fault caused by insulation failure of equipment or human touching exposed electric conduction position. Leakage tripping current In is independent of breaker rated current, an extra setting minimum current is needed for zero sequence coupling method. This method is appropriate for small current protection because of its high accuracy and sensitivity.

1. Variation setting parameters of leakage protection


Leakage protection action characteristics

Characteristics	Current multiple (I ₁ /I _{Δn})	Applicable trip time	Delay tolerance
Non-instant characteristics	< 0.5	Non-instant	
Instant characteristics	> 1.0	Instant	
Instant characteristics	= 1.0	See the table below	10% difference between tolerance = 10ms

Leakage protection action delay

Leakage protection action delay	Setting time (s)	0.05	0.08	0.17	0.25	0.33	0.43	0.5	0.68	0.87	0.32	0.43	Maximum
1Δn		0.04	0.05	1	1.2	2	2.2	3	3.2	*	4.2	5	0.04
2Δn		0.16	0.25	0.5	0.75	1	1.25	1.5	1.75	2	2.25	2.5	0.04
4Δn		0.075	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1	0.04
10Δn													


1. Schematic Diagram of leakage protection

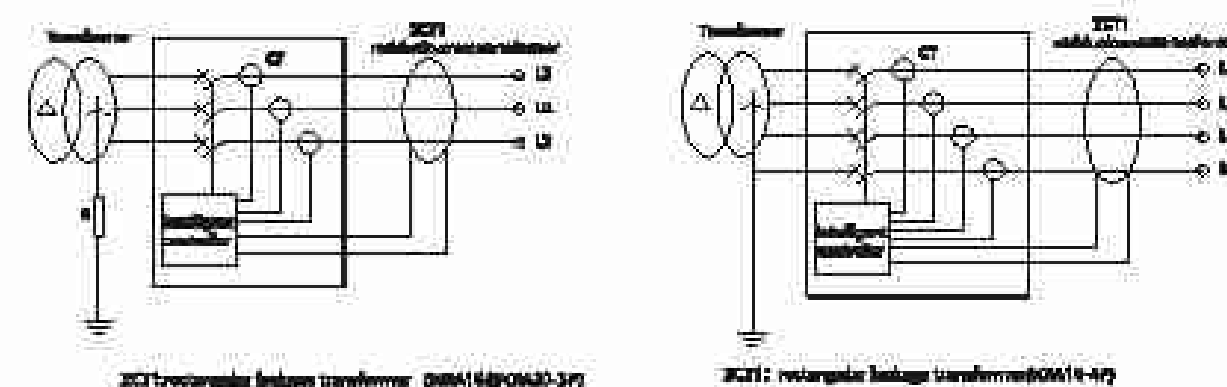

Note: For Frame used QBP40B2 and QBP40B3 products, breaker can go through ZCT1, however, not for Frame QBA40-4P and Frame QBP40B2/QBP40B3.

Dual earth fault protection

100% protection makes for a unique feature, the limitation of two independent earth fault protection curves is permissible, so that two kinds of configuration can be staged on the same drive. The release can differentiate unfixed regional earth fault, because of the feature to connect the 100% fault breaker to trip and the fixed regional earth fault to connect the medium-voltage circuit breaker to trip.

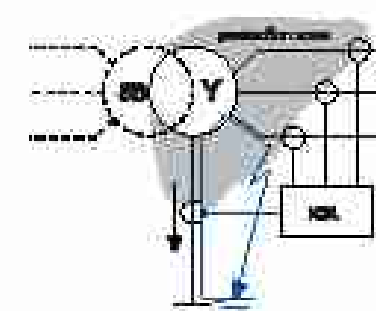

Accessories



Locks

Pushbutton lock

The pushbutton lock is to lock the circuit breaker for a permanent current block as follows:

- prevent the breaking function and the making function of the circuit breaker from reoperation;
- and guarantee the reliable running of the circuit breaker.

Body lock

+ A lock is lock included four types. The three new are applied to 2 (figure 1) and 1 (figure 2) current power distribution system:

- Standby lock
- One lock and one key
- Two locks and one key
- Three locks and two keys

Note: When the user separately purchases the lock for installation, the panel needs to be a panel with 2 hole spacing, and the hole spacing is provided by the user.

Hole diameter: M50 (12.65 mm) M50.20 (12.65 mm)



Safety shutter padlock

- + The padlock is prepared by user. Distance of the lock is no more than 40mm. When a circuit breaker body is at the disconnected position, the safety shutter cannot be blocked. When the disconnecting contact is closed.

* "Disconnected" position padlock

When the shock and body are locked in "Disconnected" position by padlock, the parking handle cannot be inserted into parking handle arm, and then the position of the body cannot be changed.

Door interlock

Circuit breaker door interlock

- A cabinet door is prohibited to be opened when the circuit breaker is closed.
- The cabinet door is allowed to be opened when the circuit breaker is disconnected.


Circuit breaker position door interlock

The cabinet door is prohibited to be opened when the circuit breaker is at the connected and near part. The cabinet door is allowed to be opened when the circuit breaker is at the disconnected position.



Cable mechanical interlock

It can realize the interlock of two horizontal or vertical 4-wire installed three poles or four poles draw-out type or fixed type circuit breaker.

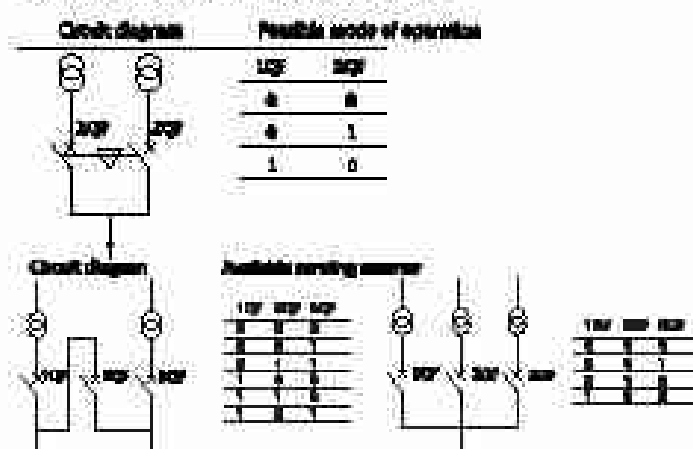

Note: 1) The Ad level of the cable wire core radius is more than 120%
2) The Ad level of the cable wire core radius is more than 120%
3) The cable wire core radius is more than 120%
4) The cable wire core radius is more than 120%
5) The cable wire core radius is more than 120%



Indication contacts

ON/OFF indication contacts			
Standard configuration	400	Current (I _N) / Voltage (U _N)	AC0001 AC of 100A16 only
Breaking capacity		Current (I _N) / Voltage (U _N)	Current (I _N) / Voltage (U _N)
Indication category	VAC(AC-12)	1.5/240, 0.75/415	1.5/240, 0.75/415
	VDC(DC-12)	0.55/110, 0.27/220	0.55/110, 0.27/220

"Connected", "Disconnected" and "Test" position indication contacts			
Standard configuration	100V	Current (I _N) / Voltage (U _N)	
Breaking capacity		Current (I _N) / Voltage (U _N)	
Indication category	VAC(AC-12)	1.5/240, 0.75/415	
	VDC(DC-12)	0.55/110, 0.27/220	

Alarm indication contacts			
Standard configuration	100	Current (I _N) / Voltage (U _N)	
Breaking capacity		Current (I _N) / Voltage (U _N)	
Indication category	VAC(AC-12)	1.5/240, 0.75/415	
	VDC(DC-12)	0.55/110, 0.27/220	

Spring charging indication contacts			
Standard configuration	110V	Current (I _N) / Voltage (U _N)	
Breaking capacity		Current (I _N) / Voltage (U _N)	
Indication category	VAC(AC-12)	1.5/240, 0.75/415	
	VDC(DC-12)	0.55/110, 0.27/220	

Note: 1) CO refers to a switch contact, and a normally open and a normally closed contact is provided with a common terminal.

2) NO refers to a normally open contact, NC refers to a normally closed contact.



NMA Series MCB MCCB Series MCCB



Shunt Release

• Motor-driven mechanism (MD) (standard is 0.0 figure)

When the circuit breaker is switched on, an electromagnetic mechanism stores energy automatically. When the circuit breaker is tripped, the device can switch back to the on energy storage handle as soon as no auxiliary power supply is provided.

Operating data	
Power supply	110V AC/50Hz
Operating threshold	170V, 300V, 400V, 500V, 600V, 700V, 800V, 900V, 1000V, 1100V, 1200V, 1500V, 1800V, 2000V, 2200V, 2400V, 2600V, 2800V, 3000V, 3200V, 3400V, 3600V, 3800V, 4000V, 4200V, 4400V, 4600V, 4800V, 5000V, 5200V, 5400V, 5600V, 5800V, 6000V, 6200V, 6400V, 6600V, 6800V, 7000V, 7200V, 7400V, 7600V, 7800V, 8000V, 8200V, 8400V, 8600V, 8800V, 9000V, 9200V, 9400V, 9600V, 9800V, 10000V
Power off power loss (W or VA)	10W (100W) 20W (200W) 30W (300W) 40W (400W) 50W (500W) 60W (600W) 70W (700W) 80W (800W) 90W (900W) 100W (1000W)
Motor consumption	0.1W
Charging time	10s
Operation frequency	10000 times

• Shunt Release (SRT)

The Shunt Release (SRT) is used to remotely disconnect the circuit breaker. When the circuit breaker is in the closed state, it can be opened remotely.

The SRT also has a built-in AC and DC control mode. When the power supply voltage is equal to the rated voltage between 90% and 110% of the rated control power supply voltage, the SRT can reliably disconnect the circuit breaker.

Characteristics of shunt release

Rated control power supply voltage (V AC)	AC220/230/240	AC380/400/415	DC220	DC110	AC110
Operating voltage (V)	100~110V				
Break time (ms)	<20				
Power consumption (VA/W)	500	620	500	<60	<60

TIP:

The Shunt Release and Closing Electromagnet belong to the pulse energization working mode, and it is necessary to ensure that the pulse current is not less than 2000mA and the energization interval is greater than 15s.



• Closed Electromagnet

After the average voltage of the circuit is completed, the closed Electromagnet can be opened and controlled within a range of 10 meters to remotely lock release the average voltage going back at the operating mechanism to close the circuit breaker.

Characteristics of closed electromagnet

Rated control power supply voltage (V AC)	AC220/230/240	AC380/400/415	DC220	DC110	AC110
Operating voltage (V)	100~110V				
Break time (ms)	<20				
Power consumption (VA/W)	500	620	500	<60	<60

TIP:

The Shunt Release and Closing Electromagnet belong to the pulse energization working mode, and it is necessary to ensure that the pulse current is not less than 2000mA and the energization interval is greater than 15s.



NMA Series MVT MCCB Series MVT



NMA Series MVT



MCCB Series MVT

• Undervoltage release (UVT)

Undervoltage release (UVT) (Optional). The power must be removed on before the circuit breaker is closed.

The undervoltage release has two main functions: operation and delayed operation.

Operation type of circuit breaker undervoltage release	Self-energizing	Delayed energizing
Under-voltage lockout release	100V~1800V, 2000V	100V~2100V, 2400V, 2600V
Under-voltage delay release	100V~1800V, 2000V	100V~2100V, 2400V, 2600V

Note:

1. 100V~1800V undervoltage delay does not require an external delay controller. The power-off operation is in lockout mode operation. There is no zero voltage delay function.
2. 100V~1800V undervoltage delay does not require an external undervoltage delay controller. There is a delay function for low voltage and power-off.
3. 100V~2000V~2000V undervoltage delay requires an external delay controller. There is a delay operation when the power is off. There is a zero voltage delay function.

Delay time of under-voltage release	Delay time (seconds)	Accuracy
100V~1800V	1, 3, 5, 7 s (not adjustable)	±5%
100V~2000V~2000V	1, 3, 5, 7 s (not adjustable)	0~1%
100V~2600V	0.1~10 s (adjustable)	±5%

The under-voltage will not operate when the voltage returns to 85% Vn and higher, within 5s delay time.

Note:

1. With primary undervoltage delay release may be provided for special orders.
2. With primary undervoltage delay release may be provided for special orders.
3. With primary undervoltage delay release may be provided for special orders.

Operating data of under-voltage release	
Rated control power supply voltage (V AC)	AC110V, AC220V/230V/240V, AC380V/400V/415V
Operating voltage (V)	100V~110V
Release during voltage (V)	100V~110V
Release with delay voltage (V)	100V~110V
Power consumption (100V~1800V/100V~2000V~2000V)	20W/10W (VA)

Capacity derating and power loss

Temperature capacity derating table of the fixed type circuit breaker

1600 frame temperature derating

Ambient temperature	400A	630A	800A	1000A	1250A	1600A
Connection method	Level	Level	Level	Level	Level	Level
40°	-	-	-	-	-	-
45°	-	-	-	-	-	-
50°	-	-	-	-	-	1025
55°	-	-	-	-	1180	1368
60°	-	800	-	-	1400	1600
70°	-	1100	-	600	600	1150

Note: "-" means no derating is required, the same below.

2000 frame temperature derating

Ambient temperature	800A	1000A	1250A	1600A	2000A	2500A
Connection method	Level	Level	Level	Level	Level	Level
40°	-	-	-	-	-	-
45°	-	-	-	-	1050	1289
50°	-	-	-	-	1200	1500
55°	-	-	-	-	1400	1700
60°	-	-	-	-	1600	1900
70°	-	-	-	1100	1100	1700

3200 frame temperature derating

Ambient temperature	1600A	2000A	2500A	3200A
Connection method	Level	Level	Level	Level
40°	-	-	-	-
45°	-	-	-	-
50°	-	-	-	2100
55°	-	-	2400	2700
60°	-	-	2800	3000
70°	-	-	2200	2400

4000 frame temperature derating

Ambient temperature	2500A	3200A	4000A
Connection method	Level	Level	Level
40°	-	-	-
45°	2100	-	2800
50°	2700	-	3200
55°	3000	3400	3400
60°	3200	3600	3600
70°	2400	3000	3000

6300 frame temperature derating

Ambient temperature	4000A	6300A	8000A
Connection method	Level	Level	Level
40°	-	-	-
45°	-	-	-
50°	-	-	5400
55°	-	4800	5400
60°	-	4800	5300
70°	-	4200	4800

Temperature capacity derating table of the draw-out type circuit breaker

1600 frame temperature derating

Ambient temperature	400A	630A	800A	1000A	1250A	1600A
Connection method	Level	Level	Level	Level	Level	Level
40°	-	-	-	-	-	-
45°	-	-	-	-	-	-
50°	-	-	-	-	-	1250
55°	-	-	-	-	1180	1368
60°	-	800	-	-	1400	1600
70°	160	160	750	750	750	1150

2000 frame temperature derating

Ambient temperature	800A	1000A	1250A	1600A	2000A	2500A
Connection method	Level	Level	Level	Level	Level	Level
40°	-	-	-	-	-	-
45°	-	-	-	-	1050	1289
50°	-	-	-	-	1200	1500
55°	-	-	-	-	1400	1700
60°	800	-	-	-	1600	1900
70°	-	-	-	1025	1100	1700

3200 frame temperature derating

Ambient temperature	1600A	2000A	2500A	3200A
Connection method	Level	Level	Level	Level
40°	-	-	-	-
45°	-	-	-	-
50°	-	-	-	2100
55°	-	-	2400	2700
60°	-	2300	2800	3000
70°	-	2200	2400	2400

4000 frame temperature derating

Ambient temperature	2500A	3200A	4000A
Connection method	Level	Level	Level
40°	-	-	-
45°	2100	-	2800
50°	2700	-	3200
55°	3000	3400	3400
60°	3200	3600	3600
70°	2400	3000	3000

6300 frame temperature derating

Ambient temperature	4000A	6300A	8000A
Connection method	Level	Level	Level
40°	-	-	-
45°	-	-	-
50°	-	-	5400
55°	-	4800	5400
60°	-	4800	5300
70°	-	4200	4800

Altitude capacity derating factor

Altitude(m)	2000	2500	3000	3500	4000	4500	5000
Rated input or withstand voltage (Urpu/U)	12	12	12	12	11	10	8
Average insulation voltage (Uav)	1000	1000	1000	1000	917	833	600
Maximum operating voltage (Um)(50/60Hz)	690	690	690	690	690	690	540
Average hot operating current(I _h) °C	1.06	0.934	0.868	0.834	0.766	0.731	Connect the factory
Power frequency withstand voltage (U)	1500	1500	1500	1500	1000	7500	2500

Breaker model	Rated current (A)	Altitude (m)						
		3000	3500	4000	4500	5000	5500	6000
HB016	400-630	1	1	1	1	1	1	1
	800-1250	1	1	1	0.97	0.9	0.87	0.87
	1600	1	1	1	0.97	0.9	0.87	0.87
HB020	1200-1600	1	1	1	1	1	1	1
	2000	1	1	1	0.97	0.9	0.87	0.87
HB032	1600	1	1	1	1	1	1	1
	2000-2500	1	1	1	0.97	0.9	0.87	0.87
	3200	1	0.97	0.93	0.9	0.86	0.85	0.82
HB040	3200	1	1	1	0.97	0.9	0.87	0.86
	4000-5000	1	0.97	0.93	0.9	0.86	0.85	0.82
HB063	4000-5000	1	1	0.96	0.96	0.93	0.9	0.87
	6300	1	0.97	0.93	0.9	0.86	0.85	0.82

Power loss and input and output resistance

Power loss is the power loss at each pole measured at 50/60Hz. The input/output resistance is the DC resistance value of each pole at the cold state.

Frame	Rated current (A)	Circuit type	
		Power (dec(W))	Power (dec(W))
16000	400	105	156
	630	76.7	166
	800	96.1	24.1
	1000	124.6	64.6
	1250	241.9	117.2
	1600	262.7	136.2
20000	630	266	266
	800	73.7	166
	1000	116.2	57.2
	1250	180	696
	1600	294.9	1465
	2000	366.6	2043
32000	1600	137.2	60.1
	2000	196.7	93.9
	2500	316.5	146.7
	3200	479.2	2064
40000	3200	438	2396
	4000	690.2	2729
	5000	652.5	337
63000	5000	683.2	2304
	8000	630	160
	10000	1000.2	571

Dimension of busbar

Bolt configuration n

Type of bolt	Application	Fastening busbar
GB M10	Fastening busbar	GB-GBM10
GB-M12	Fastening busbar	GB-GBM12
GB-M16	Fastening secondary connector	GB-GBM16


Hole size and installation twisting moment of busbar

Drilling hole size	Distance of hole	Fastening twisting moment
10041	M10	GB-GBM10
120-GBM12	M12	GB-GBM12

Connection busbar specification reference under different temperature

Maximum permissible temperature of busbar: 100 °C

The material of busbar is bare copper.

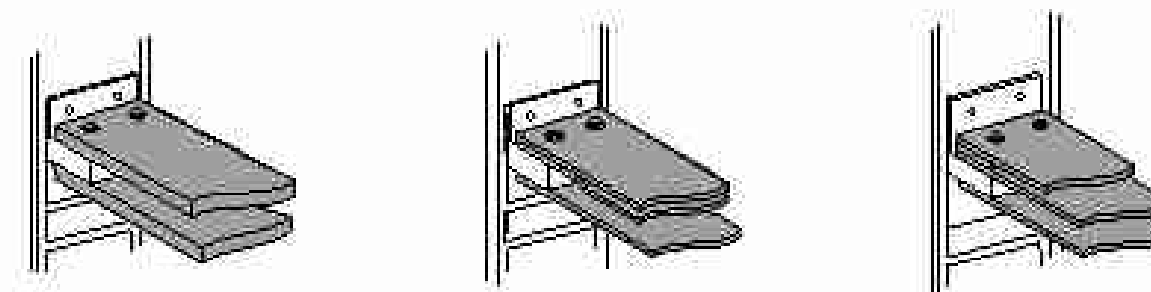

Recommended installation

Note

- When a copper bar welded busbar is not matched with a wiring terminal of the circuit breaker, welded busbar is required to be designed, no matter, and is designed by the user at their own. The maximum dimension of the extended busbar cannot be less than the requirements in the table above. The interval among the extended busbar is not less than the interval among wiring terminals of the circuit breaker.
- When the busbar recommended in the table above is installed, the electric clearance between different phases of the circuit breaker is not less than 16mm.
- Electrical elements are used for three-phase verification and high-frequency inspection, such as a high-frequency induction heating furnace, medium-frequency furnace melting equipment, a solid high-frequency welding machine such as an embedded arc electric welding machine, vacuum heating casting equipment such as a vacuum melting silicon growth furnace, infrared equipment for controlled silicon. When a circuit breaker is selected, the influence on the circuit breaker by high-order harmonic component generated by controlled silicon is required to be considered besides the influence by the environment temperature and altitude height. In the case where appropriate derating is required, and the capacity coefficient should be recommended.
- The electric clearance of fastening bolts of upper and lower busbar needs to be not less than 20mm after the installation of the busbar is over.
- After the installation of the circuit breaker, the other electrical strong identified busbar with different electric potential and between the identified busbar and the ground are not less than 16mm.


Selective provision between FWDN, FWD, and N/A		Upstream	Frame size (sum)	NAT1A							NAT2B							NAT3A							NAT3B		NAT3C	
			Frame size(B)	400	600	800	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500	2600	2700	2800			
			Incremental (B)	4	100	12	15	16.75	18	200	12	15	16.75	18	20	24	28	32	37.5	40	44	50	56	60	63	63		
From a local source	From a remote																											
H/W 125/67	10			4	94	12	13	10 T	24	94	12	13	10 T	24	1	24	T	T	T	T	T	T	T	T	T			
	14			4	94	12	13	10 T	24	94	12	13	10 T	24	1	24	T	T	T	T	T	T	T	T	T			
	20			4	94	12	13	10 T	24	94	12	13	10 T	24	1	24	T	T	T	T	T	T	T	T	T	T		
	25			4	94	12	13	10 T	24	94	12	13	10 T	24	1	24	T	T	T	T	T	T	T	T	T	T		
	30			4	94	12	13	10 T	24	94	12	13	10 T	24	1	24	T	T	T	T	T	T	T	T	T	T		
	40			4	94	12	13	10 T	24	94	12	13	10 T	24	1	24	T	T	T	T	T	T	T	T	T	T	T	
	45			4	94	12	13	10 T	24	94	12	13	10 T	24	1	24	T	T	T	T	T	T	T	T	T	T	T	
	50			4	94	12	13	10 T	24	94	12	13	10 T	24	1	24	T	T	T	T	T	T	T	T	T	T	T	
	60			4	94	12	13	10 T	24	94	12	13	10 T	24	1	24	T	T	T	T	T	T	T	T	T	T	T	
	100			4	94	12	13	10 T	24	94	12	13	10 T	24	1	24	T	T	T	T	T	T	T	T	T	T	T	
	125			4	94	12	13	10 T	24	94	12	13	10 T	24	1	24	T	T	T	T	T	T	T	T	T	T	T	
H/W 140	25			4	94	12	13	10 T	24	94	12	13	10 T	24	16	24	30	T	T	T	T	T	T	T	T	T	T	
	30			4	94	12	13	10 T	24	94	12	13	10 T	24	16	24	30	T	T	T	T	T	T	T	T	T	T	
	40			4	94	12	13	10 T	24	94	12	13	10 T	24	16	24	30	T	T	T	T	T	T	T	T	T	T	
	50			4	94	12	13	10 T	24	94	12	13	10 T	24	16	24	30	T	T	T	T	T	T	T	T	T	T	
	60			4	94	12	13	10 T	24	94	12	13	10 T	24	16	24	30	T	T	T	T	T	T	T	T	T	T	
	100			4	94	12	13	10 T	24	94	12	13	10 T	24	16	24	30	T	T	T	T	T	T	T	T	T	T	
	125			4	94	12	13	10 T	24	94	12	13	10 T	24	16	24	30	T	T	T	T	T	T	T	T	T	T	
	140			4	94	12	13	10 T	24	94	12	13	10 T	24	16	24	30	T	T	T	T	T	T	T	T	T	T	
	160			4	94	12	13	10 T	24	94	12	13	10 T	24	16	24	30	T	T	T	T	T	T	T	T	T	T	
	175			4	94	12	13	10 T	24	94	12	13	10 T	24	16	24	30	T	T	T	T	T	T	T	T	T	T	
	200			4	94	12	13	10 T	24	94	12	13	10 T	24	16	24	30	T	T	T	T	T	T	T	T	T	T	
H/W 230	125			4	94	12	13	10 T	24	94	12	13	10 T	24	16	24	30	T	T	T	T	T	T	T	T	T	T	
	140			4	94	12	13	10 T	24	94	12	13	10 T	24	16	24	30	T	T	T	T	T	T	T	T	T	T	
	160			4	94	12	13	10 T	24	94	12	13	10 T	24	16	24	30	T	T	T	T	T	T	T	T	T	T	
	180	4	94	12	13	10 T	24	94	12	13	10 T	24	16	24	30	T	T	T	T	T	T	T	T	T	T			
	200	4	94	12	13	10 T	24	94	12	13	10 T	24	16	24	30	T	T	T	T	T	T	T	T	T	T			
	225	4	94	12	13	10 T	24	94	12	13	10 T	24	16	24	30	T	T	T	T	T	T	T	T	T	T			
	230	4	94	12	13	10 T	24	94	12	13	10 T	24	16	24	30	T	T	T	T	T	T	T	T	T	T			
H/W 400	250	4	94	12	13	10 T	24	94	12	13	10 T	24	16	24	30	T	T	T	T	T	T	T	T	T	T			
	260	4	94	12	13	10 T	24	94	12	13	10 T	24	16	24	30	T	T	T	T	T	T	T	T	T	T			
	313	94	12	13	10 T	24	94	12	13	10 T	24	16	24	30	T	T	T	T	T	T	T	T	T	T				
	370	94	12	13	10 T	24	94	12	13	10 T	24	16	24	30	T	T	T	T	T	T	T	T	T	T				
	430	94	12	13	10 T	24	94	12	13	10 T	24	16	24	30	T	T	T	T	T	T	T	T	T	T				
	490	94	12	13	10 T	24	94	12	13	10 T	24	16	24	30	T	T	T	T	T	T	T	T	T	T				
	400	94	12	13	10 T	24	94	12	13	10 T	24	16	24	30	T	T	T	T	T	T	T	T	T	T				
H/W 600	400		94	12	13	10 T	24	94	12	13	10 T	24	16	24	30	375	48	48	50	50	T	T	T	T				
	700		12	13	10 T	24		12	13	10 T	24	30	24	30	375	48	48	50	50	T	T	T	T					
	800				13	10 T	24			12	10 T	24	30	24	30	375	48	48	50	50	T	T	T	T				
H/W 800	600				13	10 T	24			12	10 T	24	30	24	30	375	48	48	50	50	T	T	T	T				
	700					10 T	24				10 T	24	30	24	30	375	48	48	50	50	T	T	T	T				
	800						10 T	24				10 T	24	30	24	30	375	48	48	50	50	T	T	T	T			
H/W 1000	800					10 T	24				10 T	24	30	24	30	375	48	48	50	50	T	T	T	T				
	700						24					24	30	24	30	375	48	48	50	50	T	T	T	T				
	1000							24					24	30	24	30	375	48	48	50	50	T	T	T	T			
H/W 1250	1000						24					24	30	24	30	375	48	48	50	50	T	T	T	T				
	1250												24	30	24	30	375	48	48	50	50	T	T	T	T			
H/W 1600	1000						24					24	30	24	30	375	48	48	50	50	T	T	T	T				
	1250												24	30	24	30	375	48	48	50	50	T	T	T	T			
	1600													24	30	24	375	48	48	50	50	T	T	T	T			

Salah satu pemutus tenaga (NMA) 700V and 100V		User name	Frame size (mm)	R00016						R00030						R00033						R00040				R00051		
				Rated current (A)						Thermal magnetic setting (A)						Thermal magnetic setting (A)						Thermal magnetic setting (A)				Thermal magnetic setting (A)		
Overcurrent			Thermal magnetic setting (A)	Δ	9.4	12	1.5	18 f	24	9.4	12	1.5	18 f	24	30	34	30	3 f.3	48	48	30	30	T	T	T			
Frame size (mm)	Rated current (A)																											
NMA-100	37		Δ	9.4	12	1.5	18 f	24	9.4	12	1.5	18 f	24	30	34	30	3 f.3	48	48	30	30	T	T	T				
	40		Δ	9.4	12	1.5	18 f	24	9.4	12	1.5	18 f	24	30	34	30	3 f.3	48	48	30	30	T	T	T				
	100		Δ	9.4	12	1.5	18 f	24	9.4	12	1.5	18 f	24	30	34	30	3 f.3	48	48	30	30	T	T	T				
	125		Δ	9.4	12	1.5	18 f	24	9.4	12	1.5	18 f	24	30	34	30	3 f.3	48	48	30	30	T	T	T				
	160		Δ	9.4	12	1.5	18 f	24	9.4	12	1.5	18 f	24	30	34	30	3 f.3	48	48	30	30	T	T	T				
NMA-250	300		Δ	9.4	12	1.5	18 f	24	9.4	12	1.5	18 f	24	30	34	30	3 f.3	48	48	30	30	T	T	T				
	250		Δ	9.4	12	1.5	18 f	24	9.4	12	1.5	18 f	24	30	34	30	3 f.3	48	48	30	30	T	T	T				
NMA-400	300			9.4	12	1.5	18 f	24	9.4	12	1.5	18 f	24	30	34	30	3 f.3	48	48	30	30	T	T	T				
	313			9.4	12	1.5	18 f	24	9.4	12	1.5	18 f	24	30	34	30	3 f.3	48	48	30	30	T	T	T				
	320			9.4	12	1.5	18 f	24	9.4	12	1.5	18 f	24	30	34	30	3 f.3	48	48	30	30	T	T	T				
	400			9.4	12	1.5	18 f	24	9.4	12	1.5	18 f	24	30	34	30	3 f.3	48	48	30	30	T	T	T				
NMA-600	300				12	1.5	18 f	24		12	1.5	18 f	24	30	34	30	3 f.3	48	48	30	30	T	T	T				
	600					1.5	18 f	24			1.5	18 f	24	30	34	30	3 f.3	48	48	30	30	T	T	T				
NMA-1000	600					1.5	18 f	24			1.5	18 f	24	30	34	30	3 f.3	48	48	30	30	T	T	T				
	800						18 f	24				18 f	24	30	34	30	3 f.3	48	48	30	30	T	T	T				
	1000							24					24	30	34	30	3 f.3	48	48	30	30	T	T	T				
NMA-1250	1250													30		30	3 f.3	48	48	30	30	T	T	T				
NMA-1600	1600																3 f.3	48	48	30	30	T	T	T				


Dimensions and installation

1600A fixed type

Front view

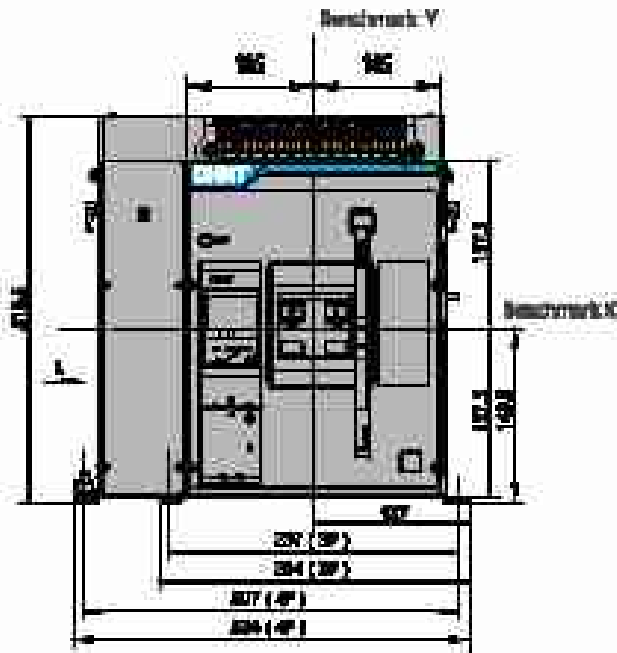


Side view

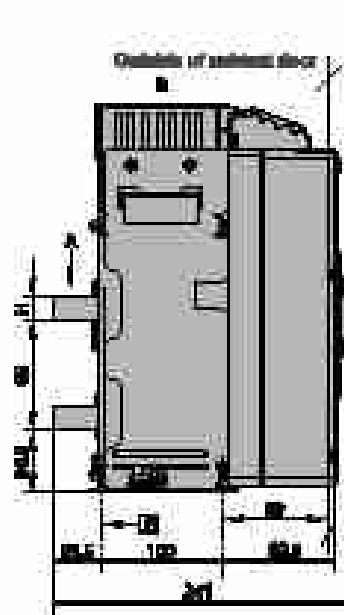

Hole size


Hole size of the base

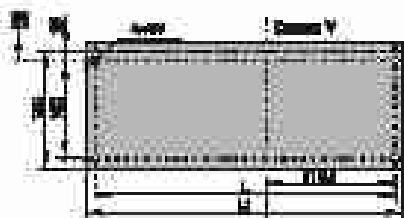

Reference diagram of the overall size of the bottom surface and the installation hole plate

H	L	LA	Remarks
3	267	254	for 400A-600A Fixed type, three pole
4	267	254	for 400A-1200A Fixed type, three pole
30	327	324	for 1600A Fixed type, three pole
4	267	254	for 400A-600A Fixed type, four pole
4	267	254	for 400A-1200A Fixed type, four pole
30	327	324	for 1600A Fixed type, four pole


Hole size of a panel

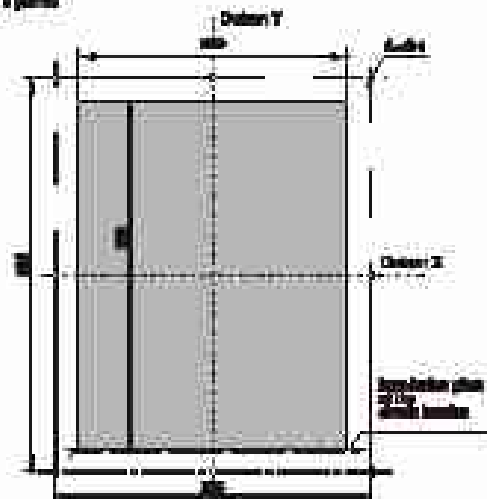



Hole size of the panel of the fixed type circuit breaker

Horizontal connection


Side view

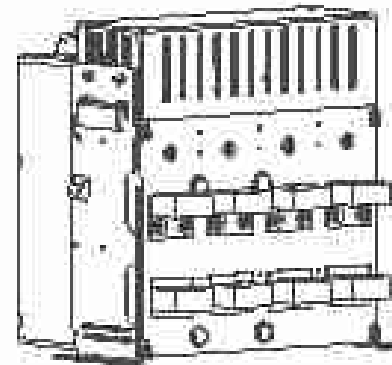

Breaker dimension/breaker interval

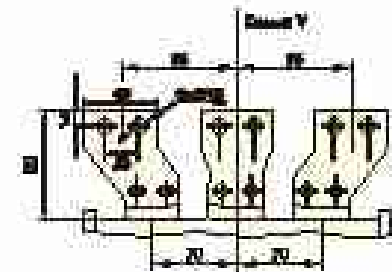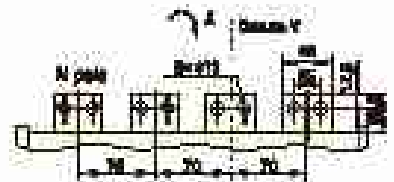

(Option I)

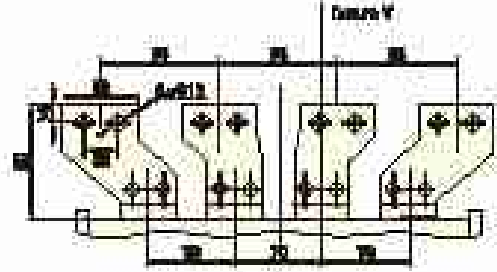


(Option II)

Number of busbar


Rated current (A)	Number of phases			
	Three phase		Four phase	
	A pole-C pole	B pole	A pole-B pole	C pole-D pole
400-600	4	2	4	4
800-1200	4	2	4	4
1600	4	4	4	4

1600A draw-out type

Front view

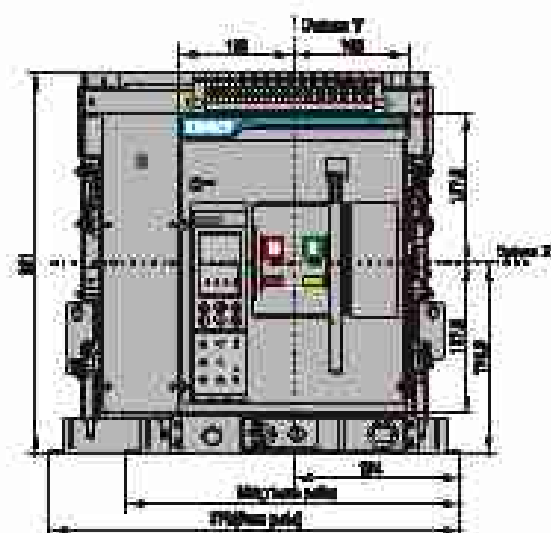


Side view

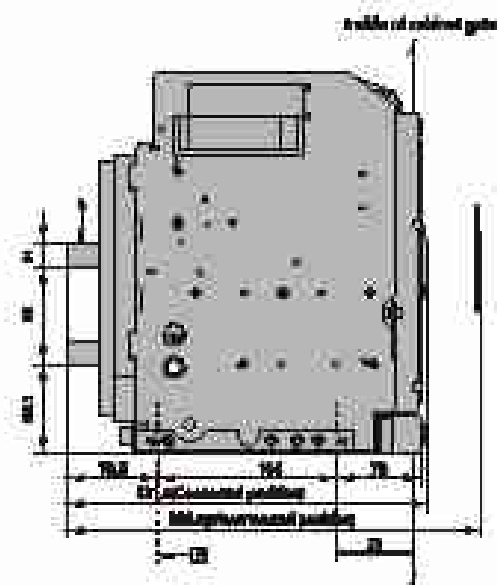

Hole size


Front view of the base

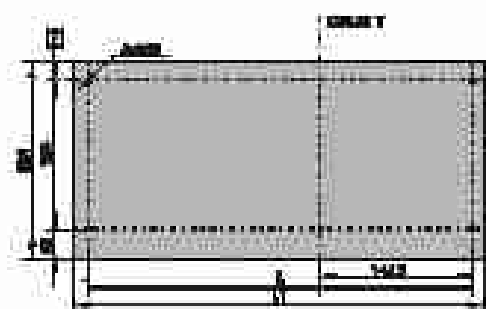

Technical diagram of the front view of the bottom surface and the installation hole plate

H	L	W	Remarks
1	257	366	16-1200A-1200A Three pole
2	257	366	16-1200A-1200A Three pole
21	257	366	16-1200A, Three pole
3	257	370	16-1200A-1200A Four pole
4	257	370	16-1200A-1200A Four pole
21	257	370	16-1200A, Four pole


Side view of a panel

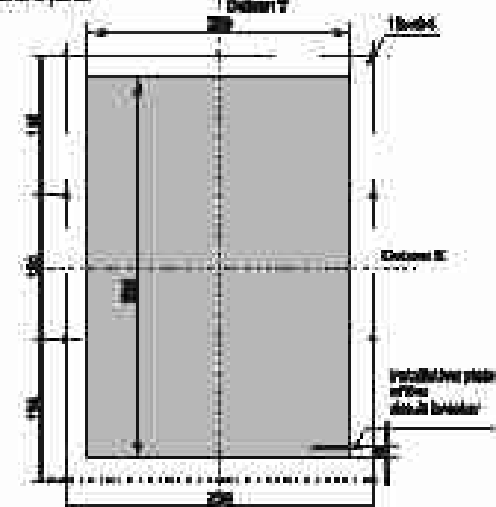




Ratio: 1:1.5 Side view of a panel of the draw-out type circuit breaker

Horizontal connection

Side view

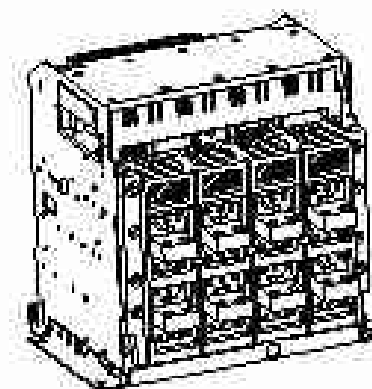

Bottom view and internal

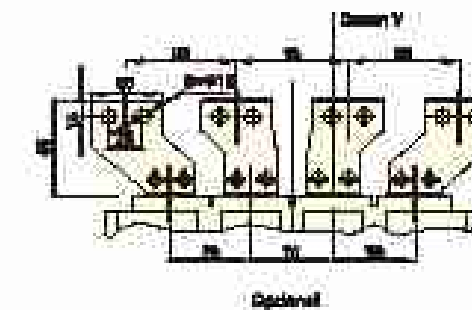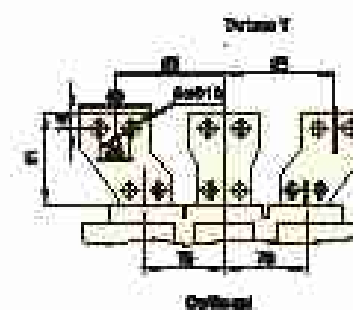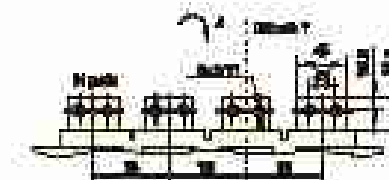


Number of busbar


Rated current (A)	Number of phase			
	Three phase		Four phase	
	A pole-B pole	B pole	A pole-B pole	C pole-D pole
400-630	4	3	4	4
800-1250	4	3	4	4
1600	4	4	4	4

2000A fixed type

Front view

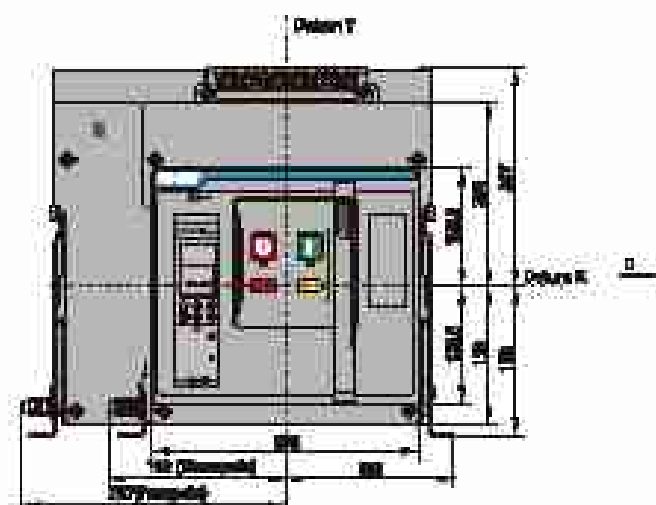


Side view

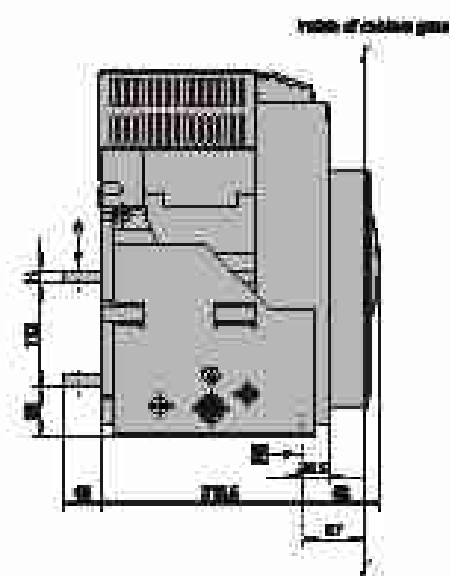


Hole size

Side view of the frame

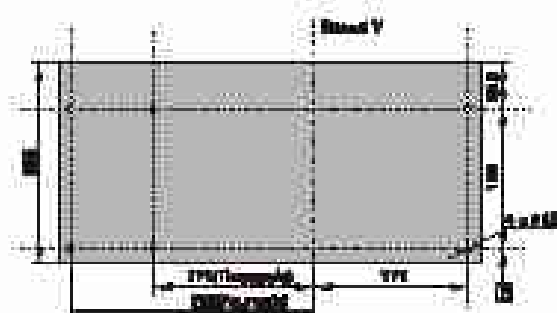

Minimum diameter of the screw shall be 10mm and for horizontal hole shall be 12mm

Side view of a panel

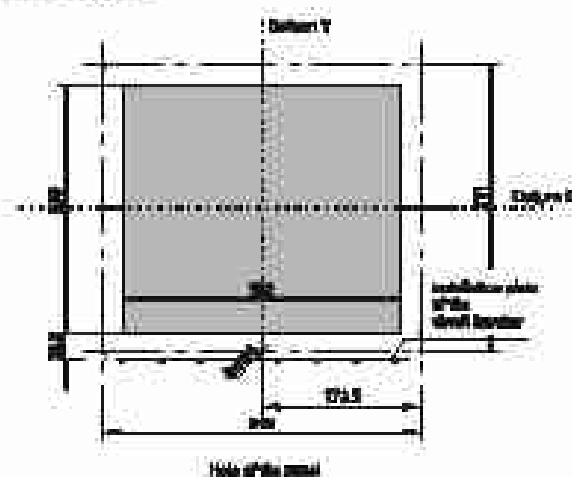


Side view of a panel




W	Frame H
10	W=1000A
13	W=1000A~1400A
16	W=1400A

Horizontal connection


Side view

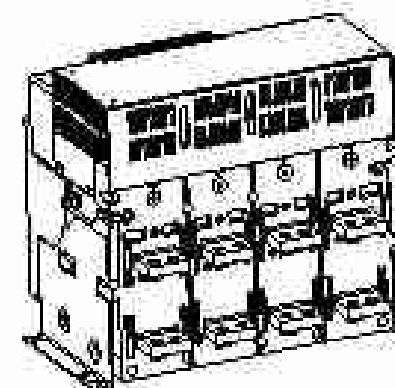


End view and internal

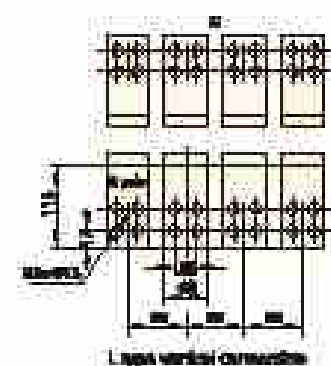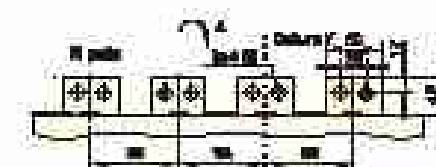

2440A draw-out type

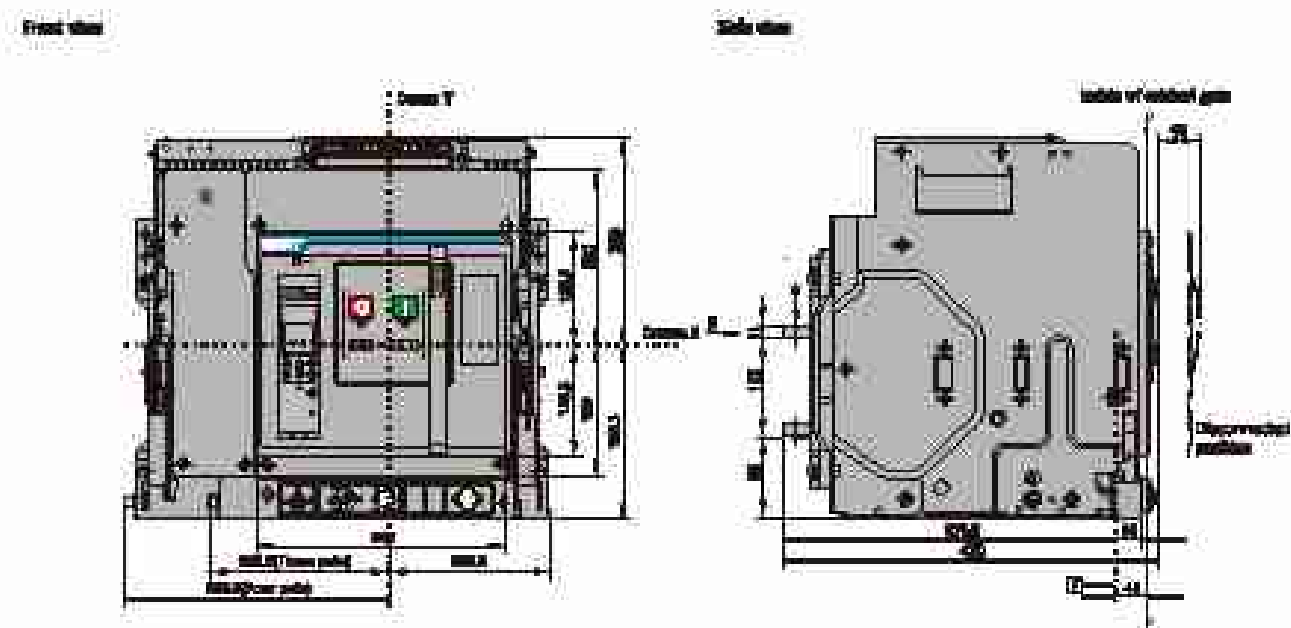


Abstract

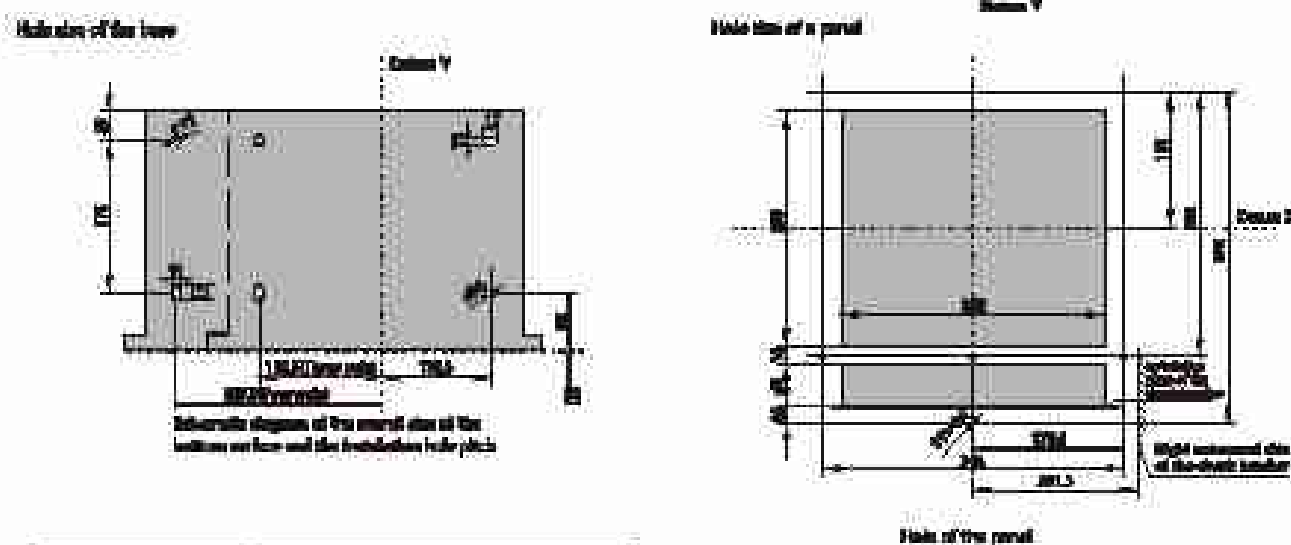


#	Source
10	IS-950A
19	IS-950B-1950A
20	IS-950B

Horizontal connection

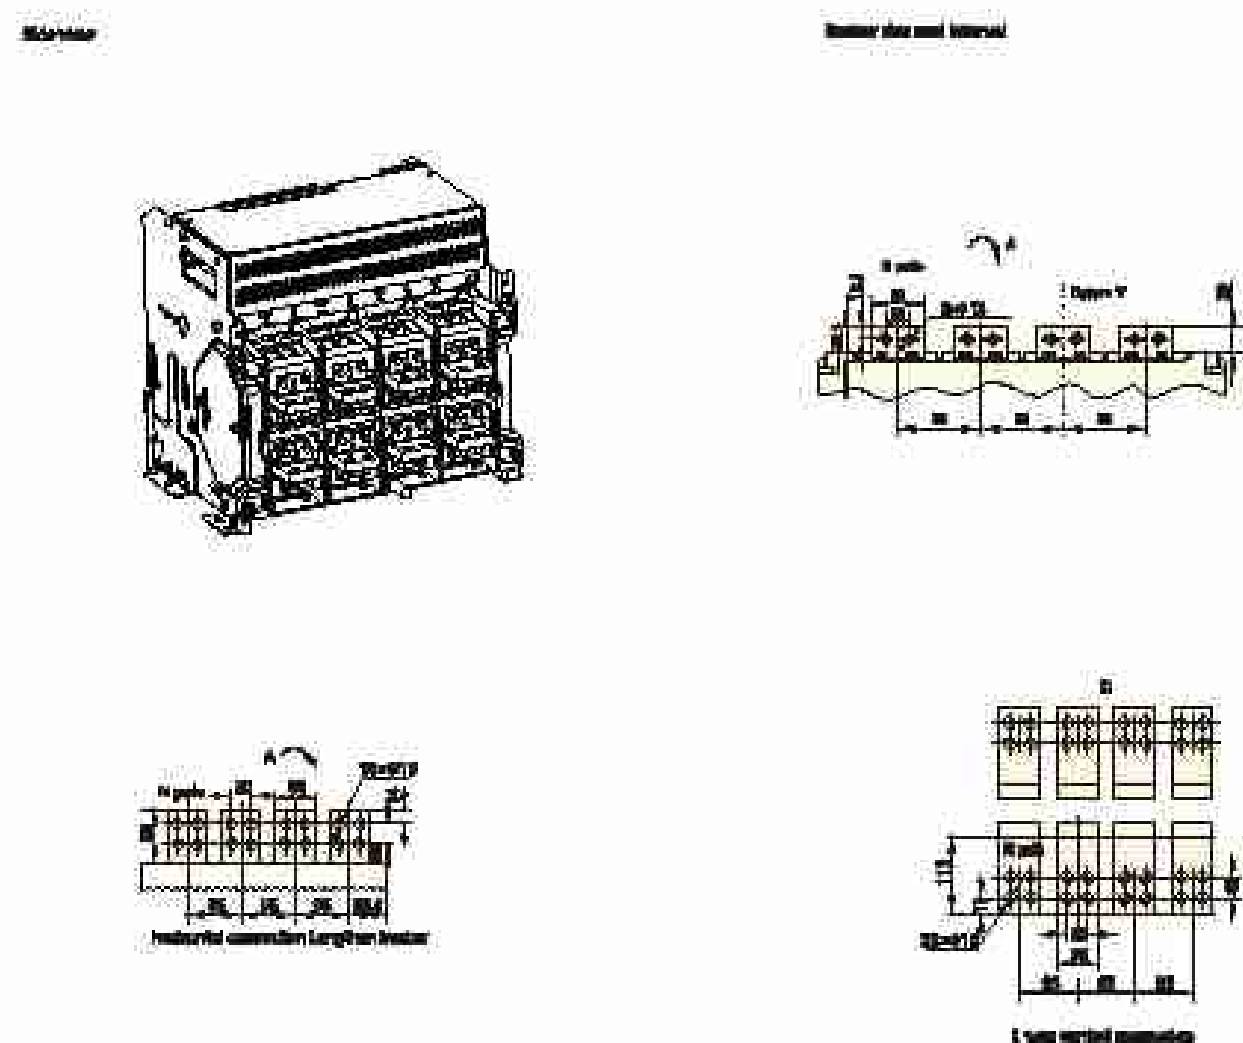


5200A Fixed type

Front view

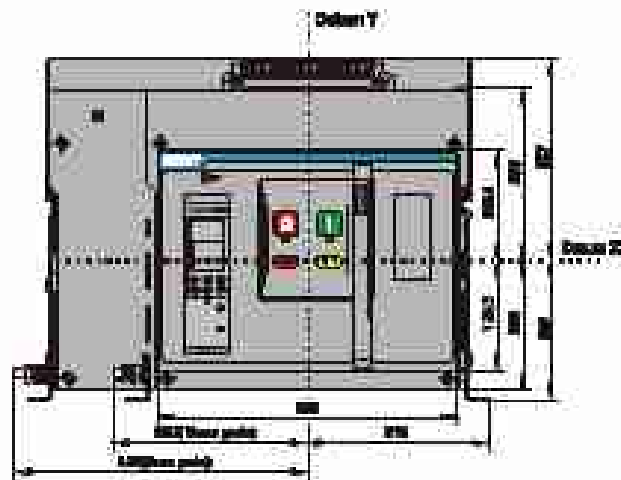


Side view

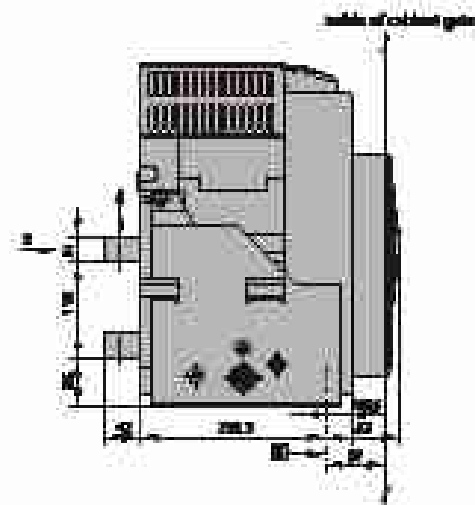


Hole size

Side view of the base

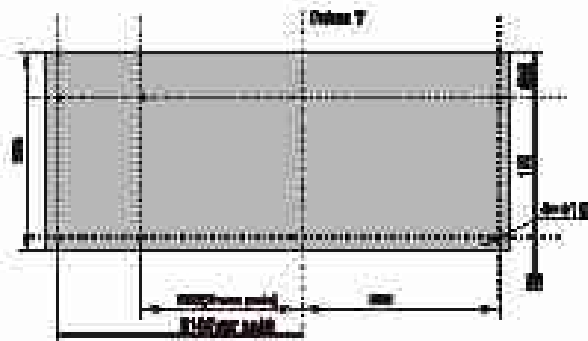

Schematic diagram of the internal side of the
bottom surface and the installation hole plate


Side of the panel

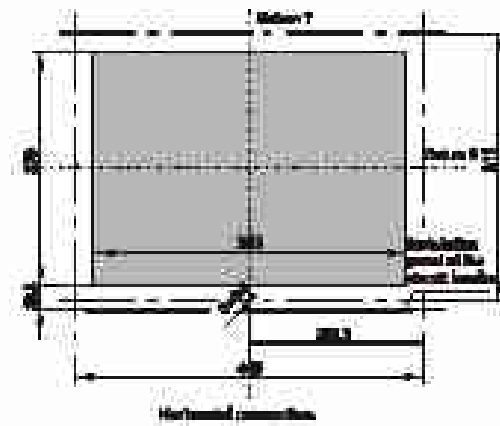




11	Remarks
20	for 1800A-2500A
30	for 3200A

Horizontal connection

Isometric

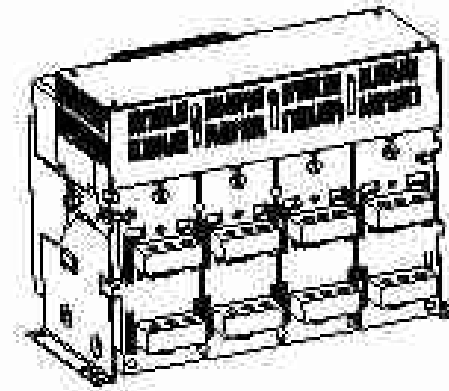


Back view and internal

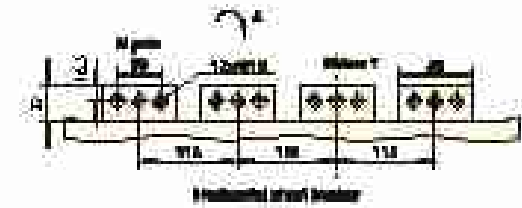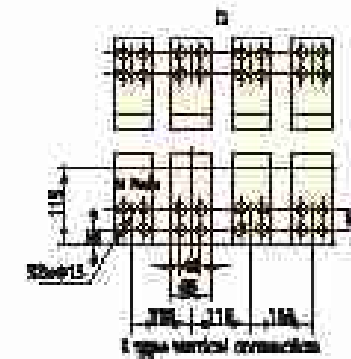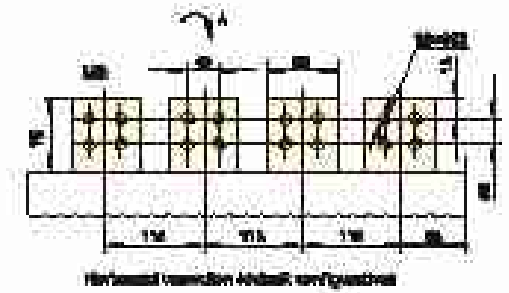

3200A draw-out type (Default configuration)

Front view


Side view

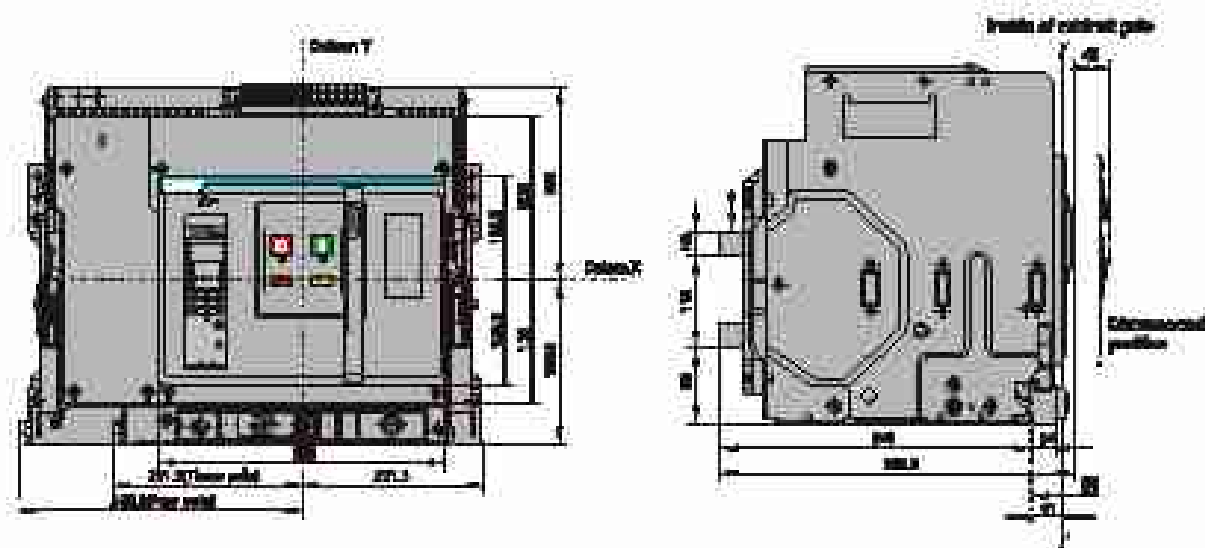

3200A draw-out type (Horizontal short busbar)

Front view


Side view

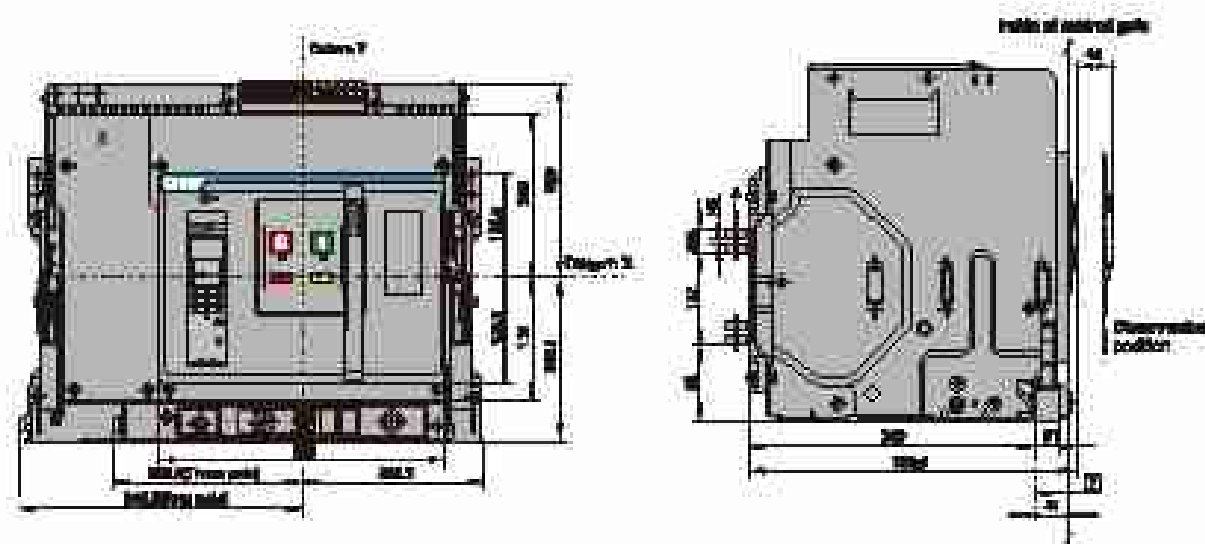

Hole size

Front view of the hole

Front view of a panel

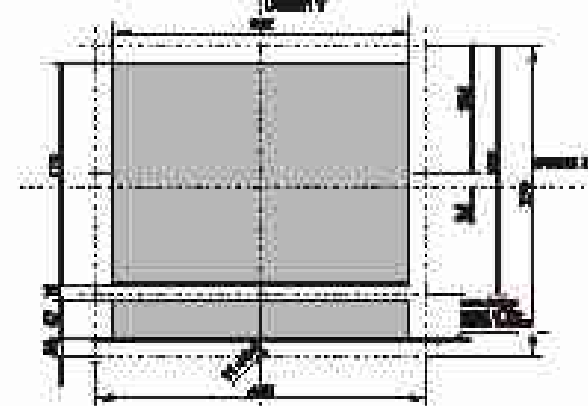

Technical drawing of the front view of the bottom surface and the insulation hole plate





Side view of the panel

Item	Unit	Remark
100	mm	100-1000-1000A
100	mm	100-1000A

Horizontal connection


Side view

Bottom view of the unit

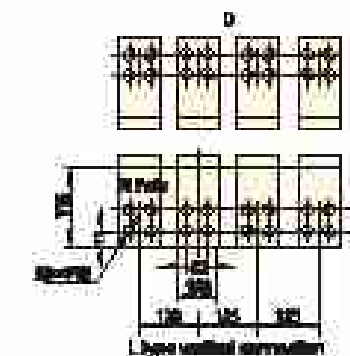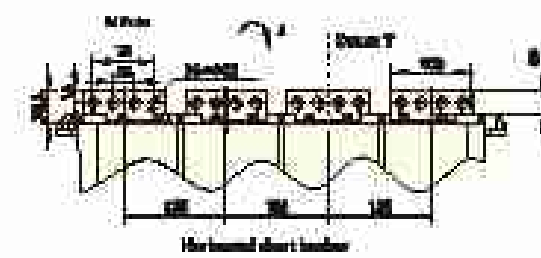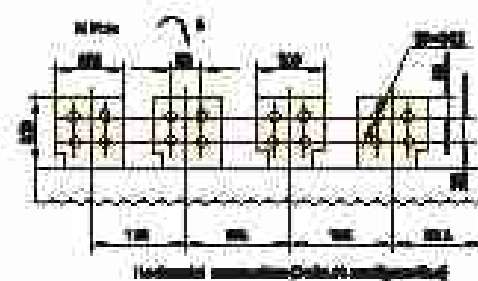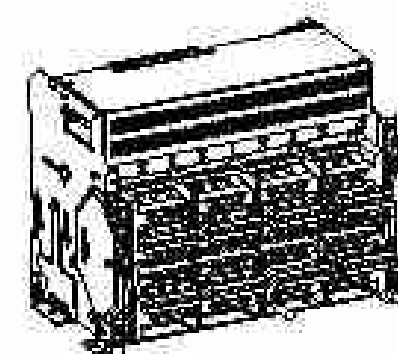


40kVA fixed type

Front view

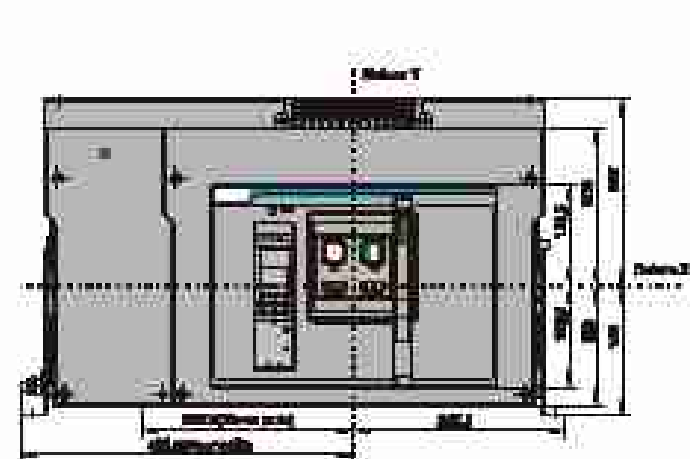


Side view

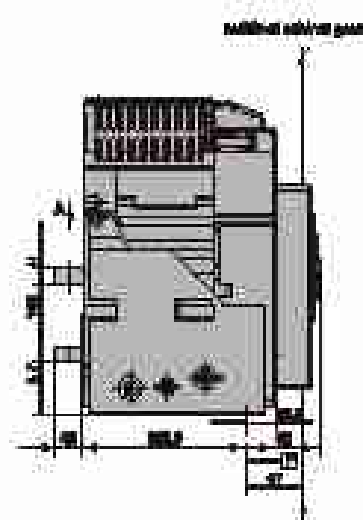


Horizontal connection

Side view

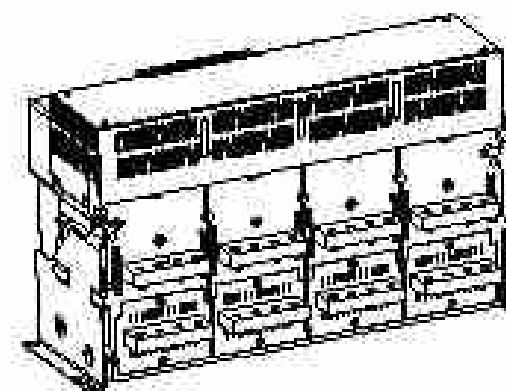


Top view (side) / Internal

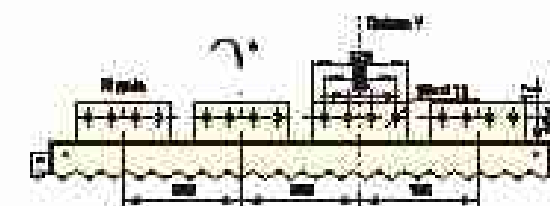

Module size

Module size of the frame

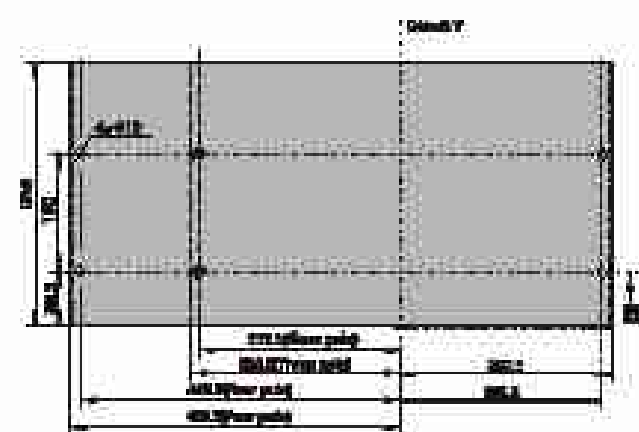

Schematic diagram of the module size of the frame and the installation hole pitch

Module size of a panel

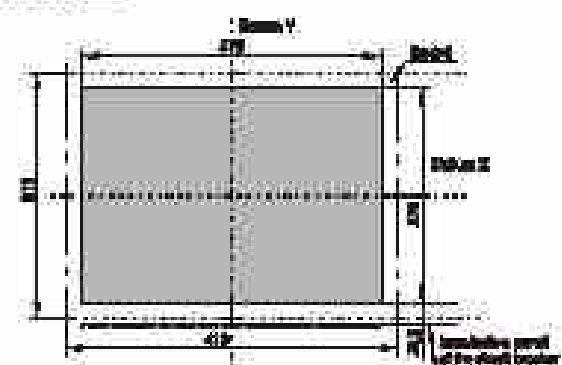



Table 12: Module size of the panel of the fixed type circuit breaker

SI	Remarks
16	16-20kVA
25	25-40kVA

40kVA draw-out type

Front view

Side view

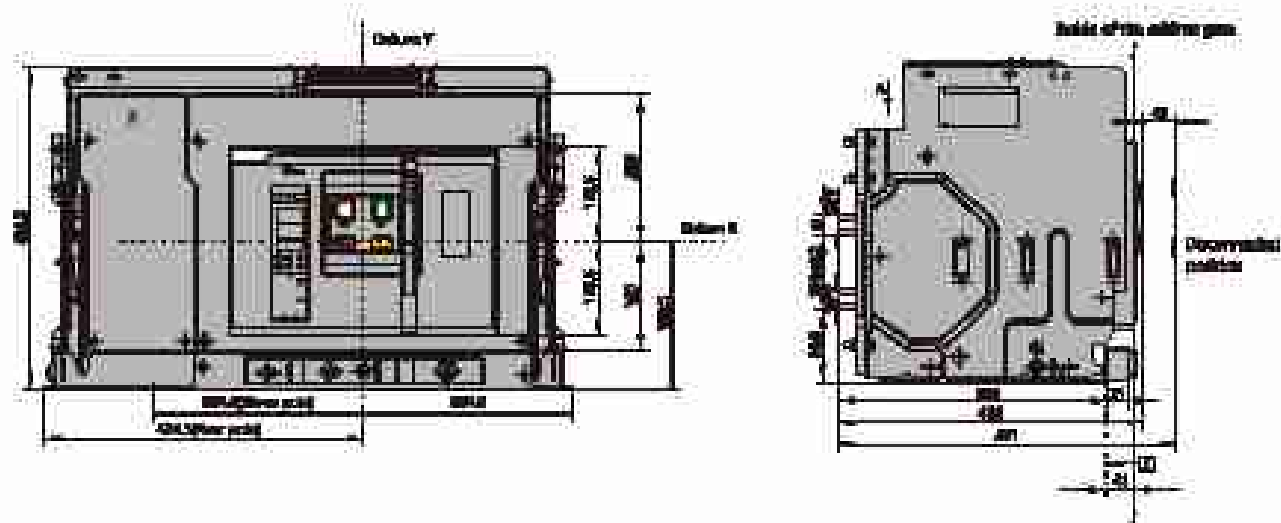

Notes:

Side view of the base

Side view of a panel

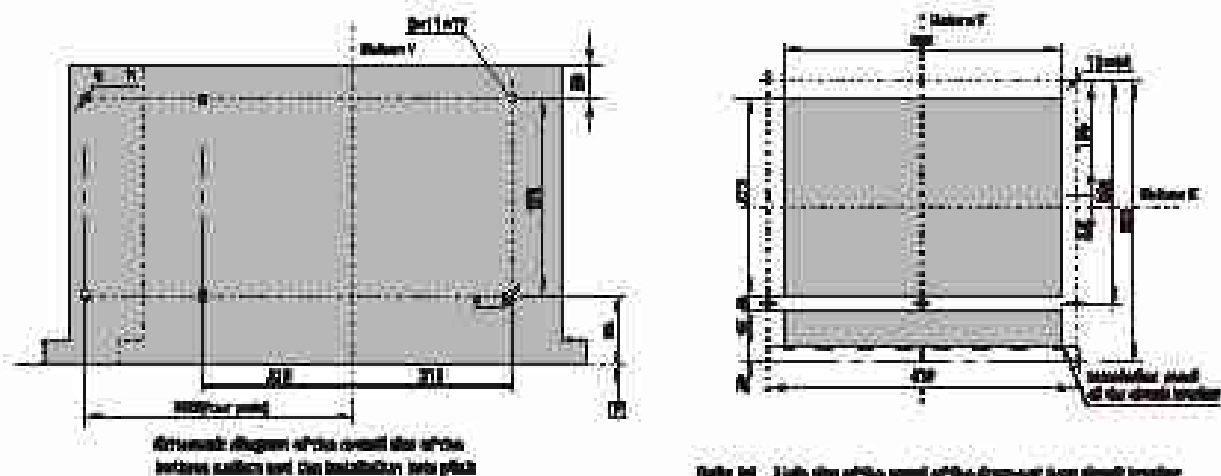



Table 10 - Side view of the panel of the draw-out type circuit breaker

Item	Remark
10	In 40kVA
11	In 40kVA-40kVA

Horizontal connection


Side view

Side view of the base

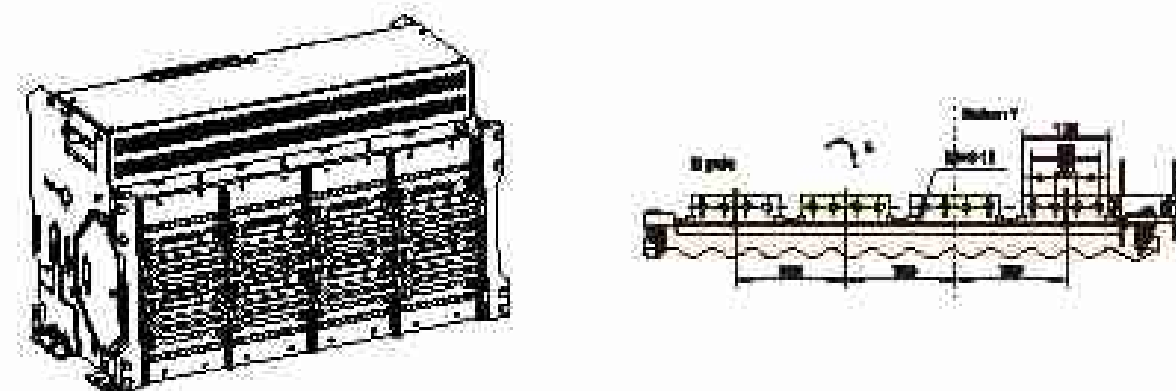


6300A fixed type

Front view

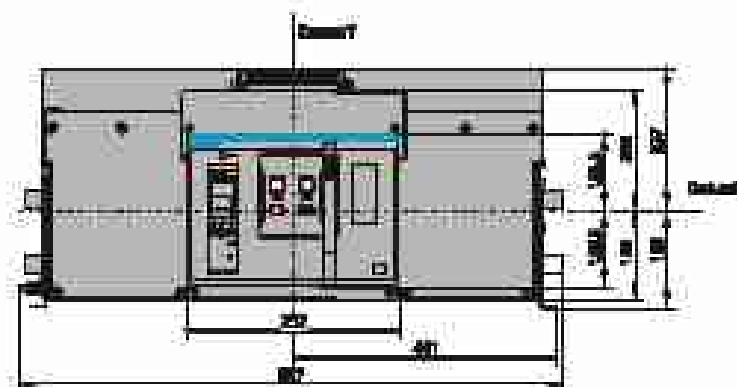


Side view

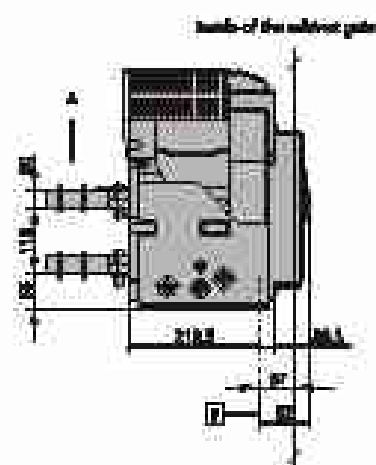


Mount size

Mount size on the base

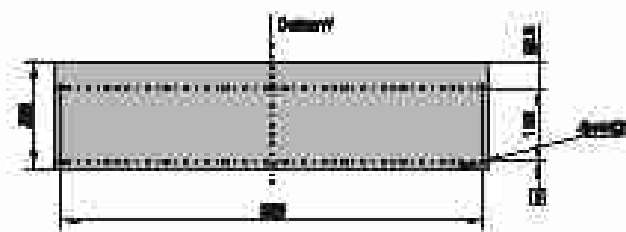

Technical drawing of the overall size of the breaker surface and the installation hole pitch


Mount size on the panel

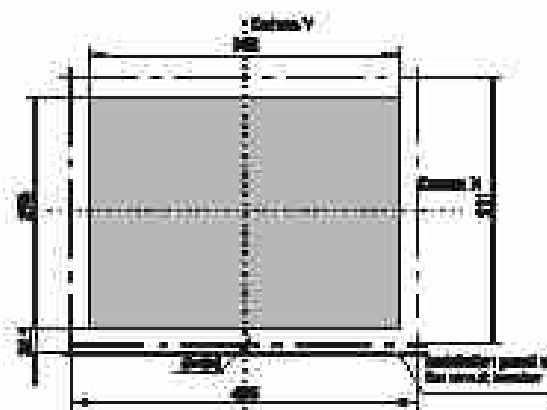


Mount size of the panel of the fixed type of air circuit breaker

Horizontal connection

Side view

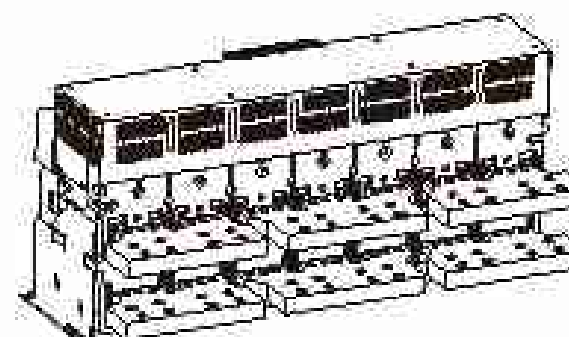


Breaker size and terminal

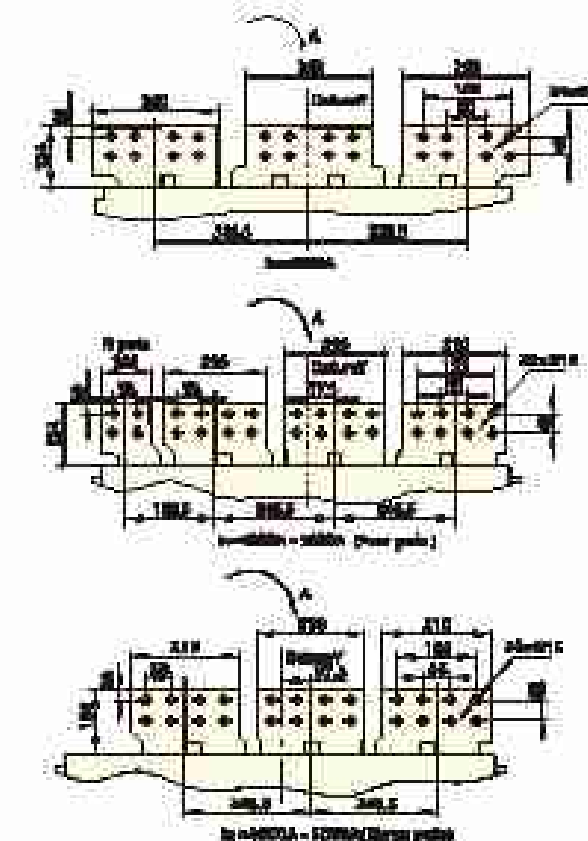

6300A draw-out type

Front view



Side view

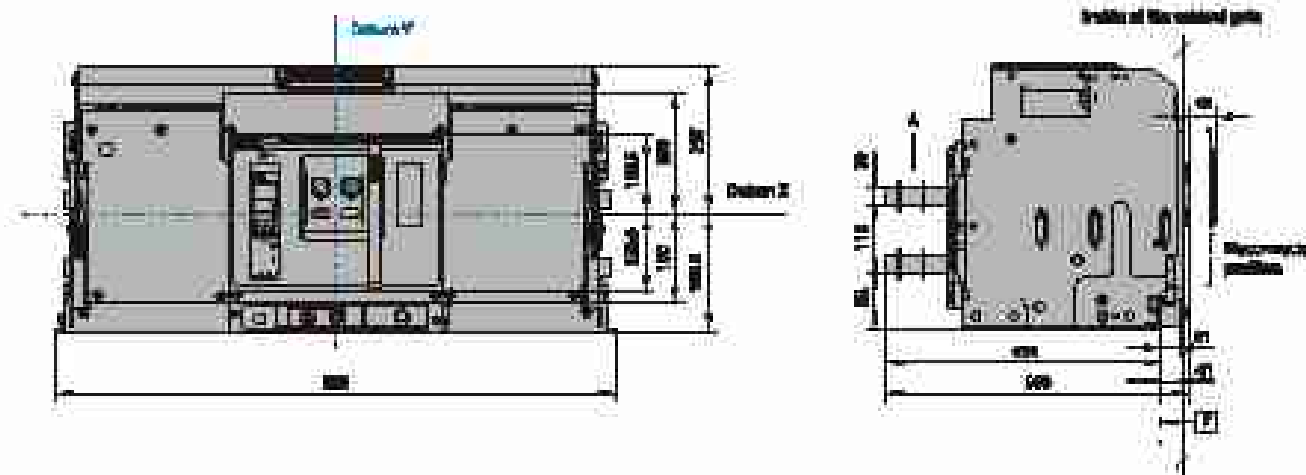

Hole size

Hole size of the base

Hole size of panel

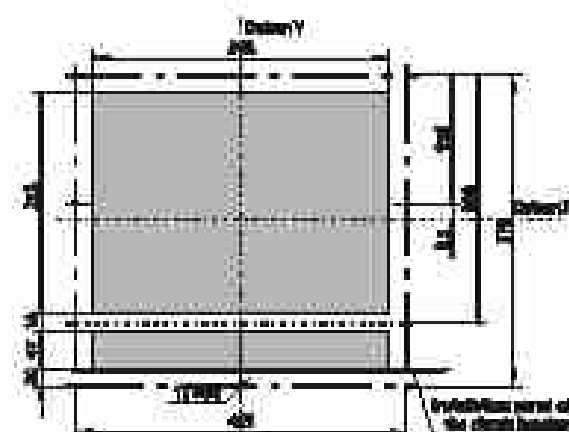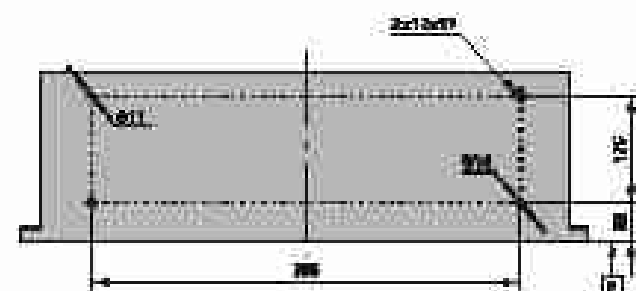



Hole size of the panel of the fixed type circuit breaker

Hole size of the panel of the draw-out type circuit breaker

Horizontal connection

Side view



Busbar size and interval

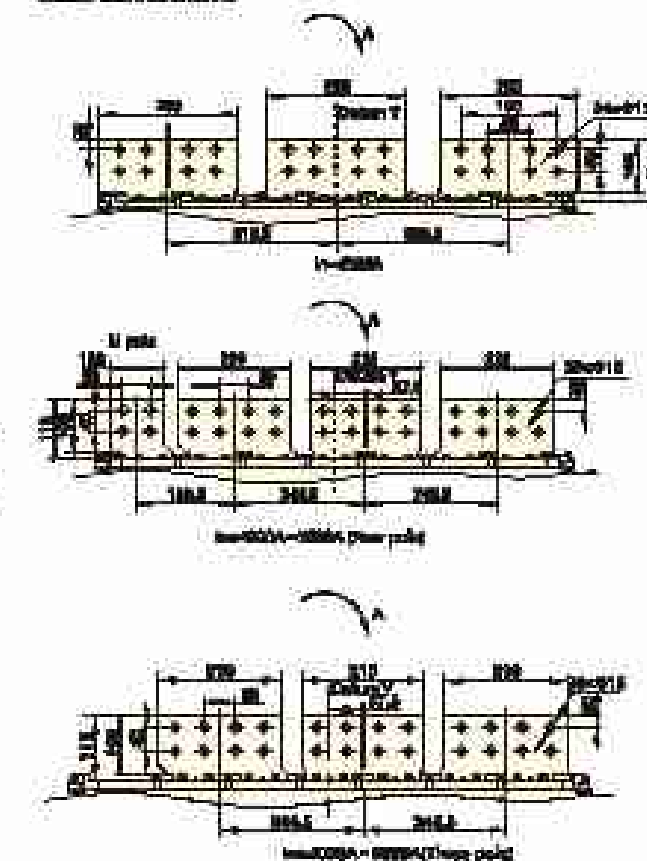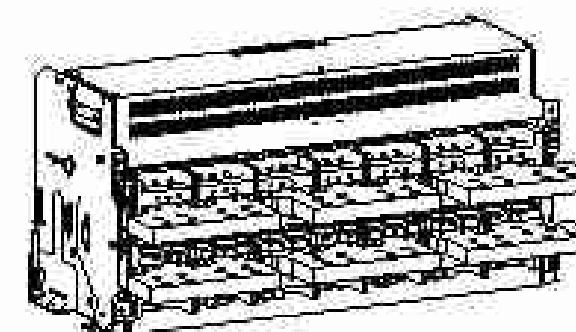

External transformer (Neutral CT) (3P+N mode)

Technical drawing of external CT dimension

The installation detail dimension of an external 4-phase transformer is as below when the structure is of 3P+N type.
The transformer is provided by the manufacturer. A connection copper bar and an installation support are constructed by user.

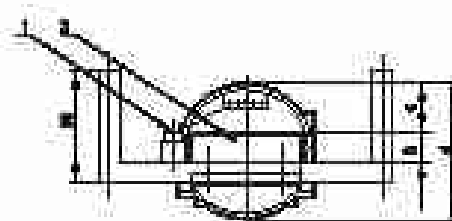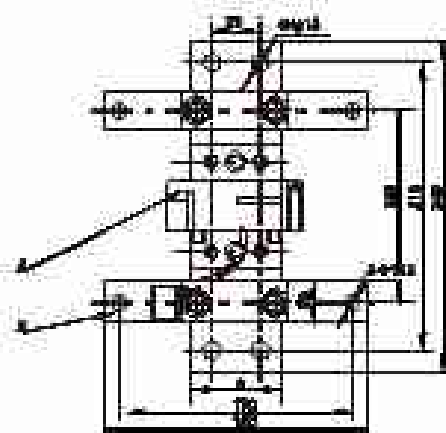


1-Wiring panel 2-Busbar 3-Filtering panel 4-Transformer

Transformer	a	b	c	d
1800	43	23	48	88
2000	68	29	54	98
3000	88	32	56	130
4000	130	37	56	88
6000	88	82	56	130

4CT Type earth current transformer





Technical drawing of external earth current transformer (4CT type)

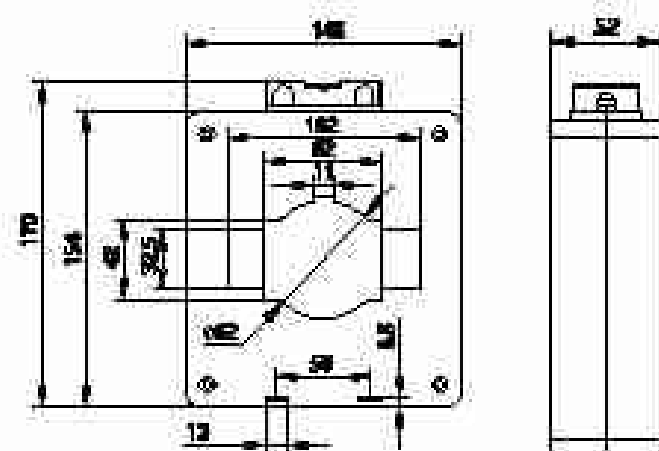

External ground current transformer



CTB-2 Type earth current transformer

Technical drawing of external earth current transformer (CT type)

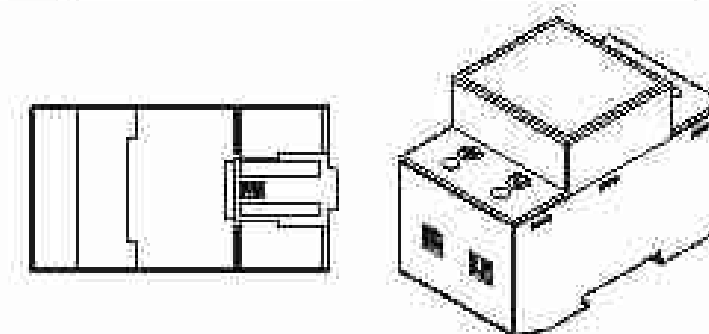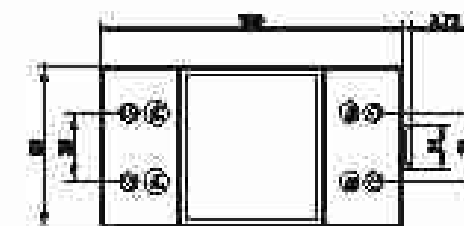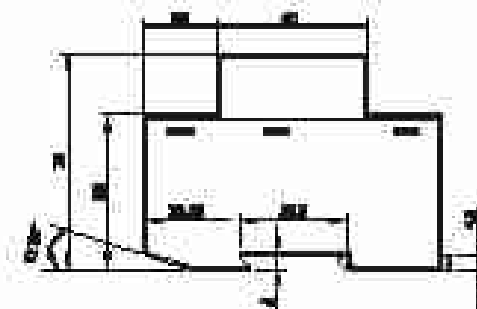


Undervoltage time delay controller

Installation detail drawing of undervoltage time delay controller which is required to be plugged in the undervoltage time delay trigger

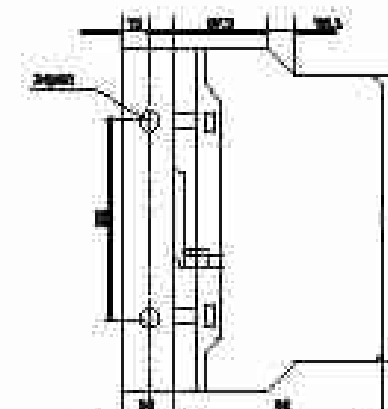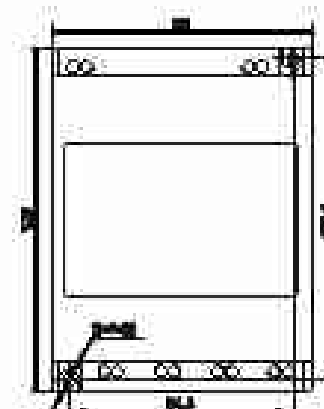

Classis position indication device

Wiring diagram

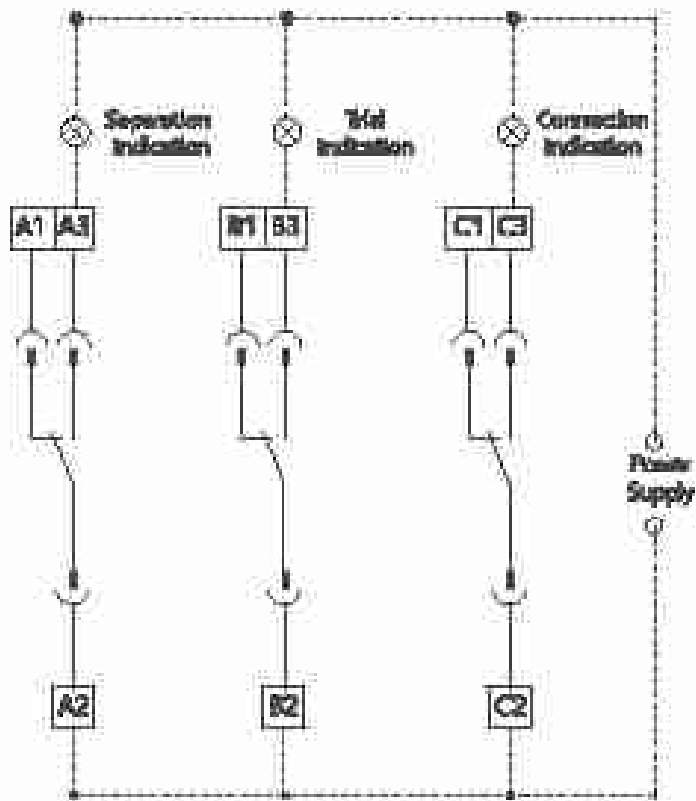

Operation requirements:

1. The Classis indication device can indicate the position including "disconnected", "near" and "connected" which are complete or partially used according to the requirements of order.
2. When the body of the drive-spring circuit breaker is pushed from the "disconnected" position to the "near" position, S6# and S6# terminals should be transferred from connection to disconnection, and S6# and S7# terminals should be transferred from disconnection to connection.
3. When the body of the drive-spring circuit breaker is pushed from the "disconnected" position to the "near" position, S6# and S7# terminals should be transferred from connection to disconnection, and S6# and S6# terminals should be transferred from disconnection to connection. There is sufficient clearance between the bus of the circuit breaker body and a bridge-type contact of the other drum, and tripping and switching operation can be carried out reliably.
4. When the body of the drive-spring circuit breaker is switched from the "near" position to the "connected" position, H100 is high secondary circuit has no electric. The H100-60 type rotary drum using continuous electric sliding contact "working" sound, and the rotary drum juggle handle rotates within 1.5 s (H100-60) and S6# terminals are being transferred from connection to disconnection, S6# and S7# terminals are transferred from disconnection to connection. The location of circuit breaker body is required to be reliably observed from the bridge-type contact of the shock base, and reliably bear the main circuit current to operate.
5. When the body of the drive-spring circuit breaker is pushed from the "connected" position to the "near" position, S6# and S6# terminals should be transferred from connection to disconnection, and S6# and S6# terminals should be transferred from disconnection to connection. There is sufficient clearance between the bus of the circuit breaker body and a bridge-type contact of the shock base, and tripping and switching operation can be carried out reliably.
6. When the body of the drive-spring circuit breaker swings from the "near" position to the "disconnected" position, S6# and S6# terminals should be transferred from connection to disconnection, and S6# and S7# terminals should be transferred from disconnection to connection, and at the same time, the circuit breaker body will cannot be drawn out, and needs to swing toward the "disconnected" position until the handle frame swing smoothly, and meanwhile, the circuit breaker body can be drawn out. After the circuit breaker is pulled out, S6# and S6# terminals should be transferred from disconnection to connection, and S6# and S7# terminals should be transferred from connection to disconnection.
7. In the position transfer operation process of the shock, the operation can only be stopped when the indication points to "disconnected", "near" and "connected" with the position indication cannot display the position of the circuit breaker body in the shock contacts.
8. The above terminal numbers are all position signal type Mc numbers (S6#-S7#), which are not compatible with secondary circuit terminal numbers.

Position signal number capacity

Rated voltage (V)	Rated breaking current (kA)	Rated opening current (kA)	Rated current capacity
400V	6	1.5	2000A
400V	1	0.75	1000A

Standard configuration	1100V type		2200V Series		3300V type		4000V Series		5500V Series	
	Fixed type	draw-out type	Fixed type	draw-out type	Fixed type	draw-out type	Fixed type	draw-out type	Fixed type	draw-out type
Circuit breaker body	■	■	■	■	■	■	■	■	■	■
Classis	■	■	■	■	■	■	■	■	■	■
Intelligent controller	■	■	■	■	■	■	■	■	■	■
Manual and automatic conversion	■	■	■	■	■	■	■	■	■	■
ON/OFF indication contact (H2)	■	■	■	■	■	■	■	■	■	■
Failure tripping indication contact	■	■	■	■	■	■	■	■	■	■
Motor operating mechanism	■	■	■	■	■	■	■	■	■	■
Closing coil	■	■	■	■	■	■	■	■	■	■
Reset release	■	■	■	■	■	■	■	■	■	■
Door lock	■	■	■	■	■	■	■	■	■	■

Optional accessories	1100V type		2200V Series		3300V type		4000V Series		5500V Series	
	Fixed type	draw-out type	Fixed type	draw-out type	Fixed type	draw-out type	Fixed type	draw-out type	Fixed type	draw-out type
Manual motor drive wheel	■	■	■	■	■	■	■	■	■	■
Adjustable time delay mechanism	■	■	■	■	■	■	■	■	■	■
Relocation lock	■	■	■	■	■	■	■	■	■	■
"Thrust" position pull-out		■		■		■		■		■
Interlocking pull-out		■		■		■		■		■
Interlock	■	■	■	■	■	■	■	■	■	■
Failure short circuit		■		■		■		■		■
Interlocking lock		■		■		■		■		■
Control indicator contact H2	■	■								
ON/OFF indication contact (H2) + H2			■	■	■	■	■	■	■	■
ON/OFF indication contact (H2) + H2			■	■	■	■	■	■	■	■
ON/OFF indication contact (H2) + H2			■	■	■	■	■	■	■	■
ON/OFF indication contact H2			■	■	■	■	■	■	■	■
"Thrust" "Thrust" pull-out" pull-out lock		■		■		■		■		■
Manual lock	■	■	■	■	■	■	■	■	■	■
Interlocking controller	■	■	■	■	■	■	■	■	■	■
Interlocking indicator (H2)	■	■	■	■	■	■	■	■	■	■
Interlocking indicator and automatic lock	■	■	■	■	■	■	■	■	■	■
Interlocking lock	■	■	■	■	■	■	■	■	■	■
Triple mechanical lock			■	■	■	■	■	■	■	■

NXA Product Selection Table

Frame size	100kA	125kA	160kA	200kA	250kA	31.5kA
Chassis number	N □ ACB □	S □ ACB □	H □ ACB □	S □ ACB □	H □ ACB □	H □ ACB □
Rated current	100A □	125A □	160A □	200A □	250A □	315A □
	100A □	125A □	160A □	200A □	250A □	315A □
	100A □	125A □	160A □	200A □	250A □	315A □
	100A □	125A □	160A □	200A □	250A □	315A □
Number of poles	3 poles □	4 poles □	5 poles □	6 poles □	8 poles □	12 poles □
Installation style	Horizontal draw-out □	Vertical draw-out □	Horizontal draw-out □	Vertical draw-out □	Horizontal draw-out □	Vertical draw-out □
Intelligent capacity	M type □	A type □	P type □	H type □		
Electric accessories (for AC110V to 690V)	AC110V □ AC220V/230V □ AC380V/400V □ AC480V/500V □ AC690V □ AC110V □ AC220V □					Order — V □
	Under-voltage release (no DC) (Optional) □					Order — V □
	Over-current release (no DC) (Optional) □					Order — V □
	Over-voltage release (no DC) (Optional) □					Order — V □
Auxiliary circuit	AC110V □ AC220V/230V □ AC380V/400V □ AC480V/500V □ AC690V □					Order — V □
	AC110V □ AC220V/230V □ AC380V/400V □ AC480V/500V □ AC690V □					Order — V □
Conversion accessories	Interphase transfer □					Order — V □
Controller accessories (Optional)	Note: * Manual CT is only applicable to 3P+N * The earth current transformer should be selected when customers select earth current release type according to protection.					Order — V □
Lock mechanisms (Optional)	Position lock □ Safety status position lock □ Emergency lock □ Over-load release lock □ Time-release reset lock □					Order — V □
Interlocking interface (Optional)	1 "Normal" and 1 "Emergency" □ 2 "Emergency" and 1 "Status" □					Order — V □

NXA SKU List

NXA	16	16	16	16	D	S	ACB	N	Other
Code of Product	Code of frame size	Code of breaking capacity	Code of rated current	Code of intelligent controller	Code of installation method	Code of number of poles	Code of circuit break type	Code of operation mode	Code of special requirement
161000A (04-10)	H: basic type	04-100A 05-120A 06-160A	H: basic type	A: current type	R: basic type	3: 3 poles	AC 380V AC 400V	No code motor operation	No code no special requirement
161250A (05-12)	S: standard type	10-100A 12-120A 16-160A	S: standard type	P: power type	R: basic type	4: 4 poles	AC 400V AC 480V	AC manual operation	Special requirements code, such as UVT
161600A (11-16)	H: advanced type	20-200A 25-250A 32-320A	H: advanced type	H: hardware type			DC 110V DC 150V		
162000A (04-10)		34-340A 40-400A 50-500A					DC 230V DC 280V		
162500A (11-16)		63-630A							



NKA-1600 Fixed 3P

Rated Current	Description	Code
400A	NKA16 H04-AF3-AC220/230/240TF	940001
400A	NKA16 H04-AF3-AC220/230/240WTF	942427
400A	NKA16 H04-AF3-AC230/240/415TF	940049
400A	NKA16 H04-AF3-AC230/240/415WTF	942473
400A	NKA16 H04-AF3-BC110TF	940097
400A	NKA16 H04-AF3-BC110WTF	942570
400A	NKA16 H04-AF3-BC220TF	940145
400A	NKA16 H04-AF3-BC220WTF	942571
400A	NKA16 H04-HF3-AC220/230/240TF	210928
400A	NKA16 H04-HF3-AC220/230/240WTF	210927
400A	NKA16 H04-HF3-AC230/240/415TF	210928
400A	NKA16 H04-HF3-AC230/240/415WTF	210929
400A	NKA16 H04-HF3-BC110TF	210930
400A	NKA16 H04-HF3-BC110WTF	210931
400A	NKA16 H04-HF3-BC220TF	210932
400A	NKA16 H04-HF3-BC220WTF	210933
400A	NKA16 H04-WF3-AC220/230/240TF	940005
400A	NKA16 H04-WF3-AC220/230/240WTF	942431
400A	NKA16 H04-WF3-AC230/240/415TF	940043
400A	NKA16 H04-WF3-AC230/240/415WTF	942479
400A	NKA16 H04-WF3-BC110TF	940101
400A	NKA16 H04-WF3-BC110WTF	942527
400A	NKA16 H04-WF3-BC220TF	940149
400A	NKA16 H04-WF3-BC220WTF	942575
400A	NKA16 H04-HF3-AC220/230/240TF	210894
400A	NKA16 H04-HF3-AC220/230/240WTF	210895
400A	NKA16 H04-HF3-AC230/240/415TF	210896
400A	NKA16 H04-HF3-AC230/240/415WTF	210897
400A	NKA16 H04-HF3-BC110TF	210898
400A	NKA16 H04-HF3-BC110WTF	210899
400A	NKA16 H04-HF3-BC220TF	210900
400A	NKA16 H04-HF3-BC220WTF	210901
220A	NKA16 H04-AF3-AC220/230/240TF	940009
220A	NKA16 H04-AF3-AC220/230/240WTF	942428
220A	NKA16 H04-AF3-AC230/240/415TF	940057
220A	NKA16 H04-AF3-AC230/240/415WTF	942430
220A	NKA16 H04-AF3-BC110TF	940105
220A	NKA16 H04-AF3-BC110WTF	942531
220A	NKA16 H04-AF3-BC220TF	940130
220A	NKA16 H04-AF3-BC220WTF	942579
220A	NKA16 H04-HF3-AC220/230/240TF	210900

NKA-1600 Fixed 3P

Rated Current	Description	Code
220A	NKA16 H04-HF3-AC220/230/240WTF	210901
220A	NKA16 H04-HF3-AC230/240/415TF	210902
220A	NKA16 H04-HF3-AC230/240/415WTF	210903
220A	NKA16 H04-HF3-BC110TF	210904
220A	NKA16 H04-HF3-BC110WTF	210905
220A	NKA16 H04-HF3-BC220TF	210906
220A	NKA16 H04-HF3-BC220WTF	210907
220A	NKA16 H04-WF3-AC220/230/240TF	940010
220A	NKA16 H04-WF3-AC220/230/240WTF	942439
220A	NKA16 H04-WF3-AC230/240/415TF	940061
220A	NKA16 H04-WF3-AC230/240/415WTF	942477
220A	NKA16 H04-WF3-BC110TF	940109
220A	NKA16 H04-WF3-BC110WTF	942535
220A	NKA16 H04-WF3-BC220TF	940157
220A	NKA16 H04-WF3-BC220WTF	942583
220A	NKA16 H04-HF3-AC220/230/240TF	210938
220A	NKA16 H04-HF3-AC220/230/240WTF	210939
220A	NKA16 H04-HF3-AC230/240/415TF	210940
220A	NKA16 H04-HF3-AC230/240/415WTF	210941
220A	NKA16 H04-HF3-BC110TF	210942
220A	NKA16 H04-HF3-BC110WTF	210943
220A	NKA16 H04-HF3-BC220TF	210944
220A	NKA16 H04-HF3-BC220WTF	210945
220A	NKA16 H04-AF3-AC220/230/240TF	940017
220A	NKA16 H04-AF3-AC220/230/240WTF	942443
220A	NKA16 H04-AF3-AC230/240/415W-3P1H1TF	279027
220A	NKA16 H04-AF3-AC230/240/415TF	940065
220A	NKA16 H04-AF3-AC230/240/415WTF	942491
220A	NKA16 H04-AF3-BC110TF	940113
220A	NKA16 H04-AF3-BC110WTF	942539
220A	NKA16 H04-AF3-BC220TF	940161
220A	NKA16 H04-AF3-BC220WTF	942587
220A	NKA16 H04-HF3-AC220/230/240TF	211074
220A	NKA16 H04-HF3-AC220/230/240WTF	211075
220A	NKA16 H04-HF3-AC230/240/415TF	211076
220A	NKA16 H04-HF3-AC230/240/415WTF	211077
220A	NKA16 H04-HF3-BC110TF	211078
220A	NKA16 H04-HF3-BC110WTF	211079
220A	NKA16 H04-HF3-BC220TF	211080
220A	NKA16 H04-HF3-BC220WTF	211081
220A	NKA16 H04-WF3-AC220/230/240TF	940021

NKA-1600 Fixed 3P

Rated Current	Description	Code
300A	NKA16R03-AP3-AC220/230/240MTF	942447
300A	NKA16R03-AP3-AC220/240/415TF	940049
300A	NKA16R03-AP3-AC220/240/415MTF	942445
300A	NKA16R03-AP3-DC110TF	940117
300A	NKA16R03-AP3-DC110MTF	942443
300A	NKA16R03-AP3-DC220TF	940145
300A	NKA16R03-AP3-DC220MTF	942491
300A	NKA16R03-FP3-AC220/230/240TF	211042
300A	NKA16R03-FP3-AC220/230/240MTF	211043
300A	NKA16R03-FP3-AC220/240/415TF	211044
300A	NKA16R03-FP3-AC220/240/415MTF	211045
300A	NKA16R03-FP3-DC110TF	211046
300A	NKA16R03-FP3-DC110MTF	211047
300A	NKA16R03-FP3-DC220TF	211048
300A	NKA16R03-FP3-DC220MTF	211049
1000A	NKA16H10-AP3-AC220/230/240TF	940025
1000A	NKA16H10-AP3-AC220/230/240MTF	942451
1000A	NKA16H10-AP3-AC220/230/240W3P1MTF	229197
1000A	NKA16H10-AP3-AC220/240/415TF	940073
1000A	NKA16H10-AP3-AC220/240/415MTF	942499
1000A	NKA16H10-AP3-DC110TF	940121
1000A	NKA16H10-AP3-DC110MTF	942447
1000A	NKA16H10-AP3-DC220TF	940149
1000A	NKA16H10-AP3-DC220MTF	942493
1000A	NKA16H10-HP3-AC220/230/240TF	211138
1000A	NKA16H10-HP3-AC220/230/240MTF	211139
1000A	NKA16H10-HP3-AC220/240/415TF	211140
1000A	NKA16H10-HP3-AC220/240/415MTF	211141
1000A	NKA16H10-HP3-DC110TF	211142
1000A	NKA16H10-HP3-DC110MTF	211143
1000A	NKA16H10-HP3-DC220TF	211144
1000A	NKA16H10-HP3-DC220MTF	211145
1000A	NKA16H10-AP3-AC220/230/240TF	940029
1000A	NKA16H10-AP3-AC220/230/240W3P1MTF	446750
1000A	NKA16H10-AP3-AC220/230/240MTF	942455
1000A	NKA16H10-AP3-AC220/240/415TF	940077
1000A	NKA16H10-AP3-AC220/240/415MTF	942503
1000A	NKA16H10-AP3-DC110TF	940123
1000A	NKA16H10-AP3-DC110MTF	942451
1000A	NKA16H10-AP3-DC220TF	940173
1000A	NKA16H10-AP3-DC220MTF	942499

NKA-1600 Fixed 3P

Rated Current	Description	Code
1000A	NKA16H10-HP3-AC220/230/240TF	211105
1000A	NKA16H10-HP3-AC220/230/240MTF	211107
1000A	NKA16H10-HP3-AC220/240/415TF	211108
1000A	NKA16H10-HP3-AC220/240/415MTF	211109
1000A	NKA16H10-HP3-DC110TF	211110
1000A	NKA16H10-HP3-DC110MTF	211111
1000A	NKA16H10-HP3-DC220TF	211112
1000A	NKA16H10-HP3-DC220MTF	211113
1250A	NKA16H12-AP3-AC220/230/240TF	940023
1250A	NKA16H12-AP3-AC220/230/240MTF	942459
1250A	NKA16H12-AP3-AC220/230/240W3P1MTF	279028
1250A	NKA16H12-AP3-AC220/240/415TF	940081
1250A	NKA16H12-AP3-AC220/240/415MTF	942507
1250A	NKA16H12-AP3-DC110TF	940129
1250A	NKA16H12-AP3-DC110MTF	942453
1250A	NKA16H12-AP3-DC220TF	940177
1250A	NKA16H12-AP3-DC220MTF	942463
1250A	NKA16H12-HP3-AC220/230/240TF	211202
1250A	NKA16H12-HP3-AC220/230/240MTF	211203
1250A	NKA16H12-HP3-AC220/240/415TF	211204
1250A	NKA16H12-HP3-AC220/240/415MTF	211205
1250A	NKA16H12-HP3-DC110TF	211206
1250A	NKA16H12-HP3-DC110MTF	211207
1250A	NKA16H12-HP3-DC220TF	211208
1250A	NKA16H12-HP3-DC220MTF	211209
1250A	NKA16H12-AP3-AC220/230/240TF	940027
1250A	NKA16H12-AP3-AC220/230/240MTF	942462
1250A	NKA16H12-AP3-AC220/240/415TF	940083
1250A	NKA16H12-AP3-AC220/240/415MTF	942511
1250A	NKA16H12-AP3-DC110TF	940132
1250A	NKA16H12-AP3-DC110MTF	942459
1250A	NKA16H12-AP3-DC220TF	940181
1250A	NKA16H12-AP3-DC220MTF	942467
1250A	NKA16H12-HP3-AC220/230/240TF	211170
1250A	NKA16H12-HP3-AC220/230/240MTF	211171
1250A	NKA16H12-HP3-AC220/240/415TF	211172
1250A	NKA16H12-HP3-AC220/240/415MTF	211173
1250A	NKA16H12-HP3-DC110TF	211174
1250A	NKA16H12-HP3-DC110MTF	211175
1250A	NKA16H12-HP3-DC220TF	211176
1250A	NKA16H12-HP3-DC220MTF	211177

NKA-1600 Fixed 3P

Rated Current	Description	Code
1600A	NKA16H1&AP3-AC220/230/240TF	940041
1600A	NKA16H1&AP3-AC220/230/240WTF	942441
1600A	NKA16H1&AP3-AC220/230/240W-CT110TF	940049
1600A	NKA16H1&AP3-AC220/230/240/41.5TF	940089
1600A	NKA16H1&AP3-AC220/230/240/41.5WTF	942513
1600A	NKA16H1&AP3-DC110TF	940131
1600A	NKA16H1&AP3-DC110WTF	942443
1600A	NKA16H1&AP3-DC220TF	940133
1600A	NKA16H1&AP3-DC220WTF	942411
1600A	NKA16H1&HP3-AC220/230/240TF	211264
1600A	NKA16H1&HP3-AC220/230/240WTF	211267
1600A	NKA16H1&HP3-AC220/230/240/41.5TF	211268
1600A	NKA16H1&HP3-AC220/230/240/41.5WTF	211269
1600A	NKA16H1&HP3-DC110TF	211270
1600A	NKA16H1&HP3-DC110WTF	211271
1600A	NKA16H1&HP3-DC220TF	211272
1600A	NKA16H1&HP3-DC220WTF	211273
1600A	NKA16H1&AP3-AC220/230/240TF	940043
1600A	NKA16H1&AP3-AC220/230/240WTF	942471
1600A	NKA16H1&AP3-AC220/230/240W-CT110TF	940071
1600A	NKA16H1&AP3-AC220/240/41.5TF	940093
1600A	NKA16H1&AP3-AC220/240/41.5WTF	942519
1600A	NKA16H1&AP3-DC110TF	940141
1600A	NKA16H1&AP3-DC110WTF	942447
1600A	NKA16H1&AP3-DC220TF	940139
1600A	NKA16H1&AP3-DC220WTF	942413
1600A	NKA16H1&FP3-AC220/230/240TF	211224
1600A	NKA16H1&FP3-AC220/230/240WTF	211225
1600A	NKA16H1&FP3-AC220/230/240/41.5TF	211226
1600A	NKA16H1&FP3-AC220/230/240/41.5WTF	211227
1600A	NKA16H1&FP3-DC110TF	211228
1600A	NKA16H1&FP3-DC110WTF	211229
1600A	NKA16H1&FP3-DC220TF	211230
1600A	NKA16H1&FP3-DC220WTF	211231
400A	NKA16H04&AP3-AC220/230/240TF	940193
400A	NKA16H04&AP3-AC220/230/240WTF	942519
400A	NKA16H04&AP3-AC220/240/41.5TF	940241
400A	NKA16H04&AP3-AC220/240/41.5WTF	942557
400A	NKA16H04&AP3-DC110TF	940239
400A	NKA16H04&AP3-DC110WTF	942713
400A	NKA16H04&AP3-DC220TF	940237

NKA-1600 Fixed 3P

Rated Current	Description	Code
400A	NKA16H04&FP3-DC220WTF	942743
400A	NKA16H04&FP3-AC220/230/240TF	211220
400A	NKA16H04&FP3-AC220/230/240WTF	211221
400A	NKA16H04&FP3-AC220/230/240/41.5TF	211222
400A	NKA16H04&FP3-AC220/230/240/41.5WTF	211223
400A	NKA16H04&FP3-DC110TF	211224
400A	NKA16H04&FP3-DC110WTF	211225
400A	NKA16H04&FP3-DC220TF	211226
400A	NKA16H04&FP3-DC220WTF	211227
400A	NKA16H04&AP3-AC220/230/240TF	940194
400A	NKA16H04&AP3-AC220/230/240WTF	942523
400A	NKA16H04&AP3-AC220/230/240/41.5TF	940243
400A	NKA16H04&AP3-AC220/230/240/41.5WTF	942571
400A	NKA16H04&AP3-DC110TF	940293
400A	NKA16H04&AP3-DC110WTF	942719
400A	NKA16H04&AP3-DC220TF	940241
400A	NKA16H04&AP3-DC220WTF	942747
400A	NKA16H04&FP3-AC220/230/240TF	211298
400A	NKA16H04&FP3-AC220/230/240WTF	211299
400A	NKA16H04&FP3-AC220/230/240/41.5TF	211300
400A	NKA16H04&FP3-AC220/230/240/41.5WTF	211301
400A	NKA16H04&FP3-DC110TF	211302
400A	NKA16H04&FP3-DC110WTF	211303
400A	NKA16H04&FP3-DC220TF	211304
400A	NKA16H04&FP3-DC220WTF	211305
320A	NKA16H05&AP3-AC220/230/240TF	940201
320A	NKA16H05&AP3-AC220/230/240WTF	942621
320A	NKA16H05&AP3-AC220/230/240/41.5TF	940249
320A	NKA16H05&AP3-AC220/230/240/41.5WTF	942573
320A	NKA16H05&AP3-DC110TF	940297
320A	NKA16H05&AP3-DC110WTF	942723
320A	NKA16H05&AP3-DC220TF	940245
320A	NKA16H05&AP3-DC220WTF	942671
320A	NKA16H05&FP3-AC220/230/240TF	211294
320A	NKA16H05&FP3-AC220/230/240WTF	211295
320A	NKA16H05&FP3-AC220/230/240/41.5TF	211296
320A	NKA16H05&FP3-AC220/230/240/41.5WTF	211297
320A	NKA16H05&FP3-DC110TF	211298
320A	NKA16H05&FP3-DC110WTF	211299
320A	NKA16H05&FP3-DC220TF	211300
320A	NKA16H05&FP3-DC220WTF	211301

NKA-1600 Fixed 3P

Rated Current	Description	Code
200A	NKA1.6 N08-A F3-AC220/230/240TF	940202
200A	NKA1.6 N08-A F3-AC220/230/240WTF	940201
200A	NKA1.6 N08-A F3-AC230/400/415TF	940203
200A	NKA1.6 N08-A F3-AC230/400/415WTF	940204
200A	NKA1.6 N08-A F3-DC110TF	940201
200A	NKA1.6 N08-A F3-DC110WTF	940202
200A	NKA1.6 N08-A F3-DC220TF	940209
200A	NKA1.6 N08-A F3-DC220WTF	940212
200A	NKA1.6 N08-F F3-AC220/230/240TF	211362
200A	NKA1.6 N08-F F3-AC220/230/240WTF	211363
200A	NKA1.6 N08-F F3-AC230/400/415TF	211364
200A	NKA1.6 N08-F F3-AC230/400/415WTF	211365
200A	NKA1.6 N08-F F3-DC110TF	211366
200A	NKA1.6 N08-F F3-DC110WTF	211367
200A	NKA1.6 N08-F F3-DC220TF	211368
200A	NKA1.6 N08-F F3-DC220WTF	211369
300A	NKA1.6 N08-A F3-AC220/230/240TF	940209
300A	NKA1.6 N08-A F3-AC220/230/240WTF	940212
300A	NKA1.6 N08-A F3-AC230/400/415TF	940213
300A	NKA1.6 N08-A F3-AC230/400/415WTF	940214
300A	NKA1.6 N08-A F3-DC110TF	940201
300A	NKA1.6 N08-A F3-DC110WTF	940202
300A	NKA1.6 N08-A F3-DC220TF	940209
300A	NKA1.6 N08-A F3-DC220WTF	940212
300A	NKA1.6 N08-H F3-AC220/230/240TF	211358
300A	NKA1.6 N08-H F3-AC220/230/240WTF	211359
300A	NKA1.6 N08-H F3-AC230/400/415TF	211360
300A	NKA1.6 N08-H F3-AC230/400/415WTF	211361
300A	NKA1.6 N08-H F3-DC110TF	211362
300A	NKA1.6 N08-H F3-DC110WTF	211363
300A	NKA1.6 N08-H F3-DC220TF	211364
300A	NKA1.6 N08-H F3-DC220WTF	211365
300A	NKA1.6 N08-A F3-AC220/230/240TF	940213
300A	NKA1.6 N08-A F3-AC220/230/240WTF	940219
300A	NKA1.6 N08-A F3-AC230/400/415TF	940221
300A	NKA1.6 N08-A F3-AC230/400/415WTF	940222
300A	NKA1.6 N08-A F3-DC110TF	940209
300A	NKA1.6 N08-A F3-DC110WTF	940212
300A	NKA1.6 N08-A F3-DC220TF	940223
300A	NKA1.6 N08-A F3-DC220WTF	940224
300A	NKA1.6 N08-F F3-AC220/230/240TF	211372

NKA-1600 Fixed 3P

Rated Current	Description	Code
300A	NKA1.6 N08-F F3-AC220/230/240WTF	211424
300A	NKA1.6 N08-F F3-AC230/400/415TF	211428
300A	NKA1.6 N08-F F3-AC230/400/415WTF	211429
300A	NKA1.6 N08-F F3-DC110TF	211430
300A	NKA1.6 N08-F F3-DC110WTF	211431
300A	NKA1.6 N08-F F3-DC220TF	211432
300A	NKA1.6 N08-F F3-DC220WTF	211433
1000A	NKA1.6 H10-A F3-AC220/230/240TF	940214
1000A	NKA1.6 H10-A F3-AC220/230/240WTF	940225
1000A	NKA1.6 H10-A F3-AC230/400/415TF	940226
1000A	NKA1.6 H10-A F3-AC230/400/415WTF	940227
1000A	NKA1.6 H10-A F3-DC110TF	940212
1000A	NKA1.6 H10-A F3-DC110WTF	940229
1000A	NKA1.6 H10-A F3-DC220TF	940231
1000A	NKA1.6 H10-A F3-DC220WTF	940232
1000A	NKA1.6 H10-H F3-AC220/230/240TF	211372
1000A	NKA1.6 H10-H F3-AC220/230/240WTF	211373
1000A	NKA1.6 H10-H F3-AC230/400/415TF	211374
1000A	NKA1.6 H10-H F3-AC230/400/415WTF	211375
1000A	NKA1.6 H10-H F3-DC110TF	211376
1000A	NKA1.6 H10-H F3-DC110WTF	211377
1000A	NKA1.6 H10-H F3-DC220TF	211378
1000A	NKA1.6 H10-H F3-DC220WTF	211379
1000A	NKA1.6 H10-A F3-AC220/230/240TF	940221
1000A	NKA1.6 H10-A F3-AC220/230/240WTF	940234
1000A	NKA1.6 H10-A F3-AC230/400/415TF	940239
1000A	NKA1.6 H10-A F3-AC230/400/415WTF	940242
1000A	NKA1.6 H10-A F3-DC110TF	940214
1000A	NKA1.6 H10-A F3-DC110WTF	940232
1000A	NKA1.6 H10-A F3-DC220TF	940235
1000A	NKA1.6 H10-A F3-DC220WTF	940241
1000A	NKA1.6 H10-F F3-AC220/230/240TF	211490
1000A	NKA1.6 H10-F F3-AC220/230/240WTF	211491
1000A	NKA1.6 H10-F F3-AC230/400/415TF	211492
1000A	NKA1.6 H10-F F3-AC230/400/415WTF	211493
1000A	NKA1.6 H10-F F3-DC110TF	211494
1000A	NKA1.6 H10-F F3-DC110WTF	211495
1000A	NKA1.6 H10-F F3-DC220TF	211496
1000A	NKA1.6 H10-F F3-DC220WTF	211497
1250A	NKA1.6 H12-A F3-AC220/230/240TF	940223
1250A	NKA1.6 H12-A F3-AC220/230/240WTF	940231

NKA-1600 Fixed 3P

Rated Current	Description	Code
1250A	NKA16M12-AF3-AC230/400/415TF	940273
1250A	NKA16M12-AF3-AC230/400/415MTF	942699
1250A	NKA16M12-AF3-DC110TF	940221
1250A	NKA16M12-AF3-DC110MTF	942747
1250A	NKA16M12-AF3-DC220TF	940269
1250A	NKA16M12-AF3-DC220MTF	942793
1250A	NKA16M12-HF3-AC220/230/240TF	211384
1250A	NKA16M12-HF3-AC220/230/240MTF	211387
1250A	NKA16M12-HF3-AC230/400/415TF	211388
1250A	NKA16M12-HF3-AC230/400/415MTF	211389
1250A	NKA16M12-HF3-DC110TF	211390
1250A	NKA16M12-HF3-DC110MTF	211391
1250A	NKA16M12-HF3-DC220TF	211392
1250A	NKA16M12-HF3-DC220MTF	211393
1250A	NKA16M12-WF3-AC220/230/240TF	940229
1250A	NKA16M12-WF3-AC220/230/240A3P1NTF	296460
1250A	NKA16M12-WF3-AC220/230/240MTF	942655
1250A	NKA16M12-WF3-AC230/400/415TF	940277
1250A	NKA16M12-WF3-AC230/400/415MTF	942703
1250A	NKA16M12-WF3-DC110TF	940225
1250A	NKA16M12-WF3-DC110MTF	942751
1250A	NKA16M12-WF3-DC220TF	940272
1250A	NKA16M12-WF3-DC220MTF	942799
1250A	NKA16M12-PF3-AC220/230/240TF	211354
1250A	NKA16M12-PF3-AC220/230/240MTF	211355
1250A	NKA16M12-PF3-AC230/400/415TF	211356
1250A	NKA16M12-PF3-AC230/400/415MTF	211357
1250A	NKA16M12-PF3-DC110TF	211358
1250A	NKA16M12-PF3-DC110MTF	211359
1250A	NKA16M12-PF3-DC220TF	211360
1250A	NKA16M12-PF3-DC220MTF	211361
1600A	NKA16M16-AF3-AC220/230/240TF	940223
1600A	NKA16M16-AF3-AC220/230/240A3P1NTF	208326
1600A	NKA16M16-AF3-AC220/230/240MTF	942659
1600A	NKA16M16-AF3-AC230/400/415TF	940281
1600A	NKA16M16-AF3-AC230/400/415MTF	942707
1600A	NKA16M16-AF3-DC110TF	940229
1600A	NKA16M16-AF3-DC110MTF	942753
1600A	NKA16M16-AF3-DC220TF	940276
1600A	NKA16M16-AF3-DC220MTF	942803
1600A	NKA16M16-HF3-AC220/230/240TF	211350

NKA-1600 Fixed 3P

Rated Current	Description	Code
1600A	NKA16M16-HF3-AC220/230/240MTF	211351
1600A	NKA16M16-HF3-AC230/400/415TF	211352
1600A	NKA16M16-HF3-AC230/400/415MTF	211353
1600A	NKA16M16-HF3-DC110TF	211354
1600A	NKA16M16-HF3-DC110MTF	211355
1600A	NKA16M16-HF3-DC220TF	211356
1600A	NKA16M16-HF3-DC220MTF	211357
1600A	NKA16M16-WF3-AC220/230/240TF	940227
1600A	NKA16M16-WF3-AC220/230/240A3P1NTF	296462
1600A	NKA16M16-WF3-AC220/230/240MTF	942662
1600A	NKA16M16-WF3-AC230/400/415TF	940283
1600A	NKA16M16-WF3-AC230/400/415MTF	942711
1600A	NKA16M16-WF3-DC110TF	940232
1600A	NKA16M16-WF3-DC110MTF	942759
1600A	NKA16M16-WF3-DC220TF	940281
1600A	NKA16M16-WF3-DC220MTF	942807
1600A	NKA16M16-PF3-AC220/230/240TF	211363
1600A	NKA16M16-PF3-AC220/230/240MTF	211364
1600A	NKA16M16-PF3-AC230/400/415TF	211365
1600A	NKA16M16-PF3-AC230/400/415MTF	211366
1600A	NKA16M16-PF3-DC110TF	211367
1600A	NKA16M16-PF3-DC110MTF	211368
1600A	NKA16M16-PF3-DC220TF	211369
1600A	NKA16M16-PF3-DC220MTF	211370
400A	NKA16M4-AF3-AC220/230/240TF	108272
400A	NKA16M4-AF3-AC220/230/240MTF	192344
400A	NKA16M4-AF3-AC230/400/415TF	108320
400A	NKA16M4-AF3-AC230/400/415MTF	192392
400A	NKA16M4-HF3-AC220/230/240TF	211390
400A	NKA16M4-HF3-AC220/230/240MTF	211391
400A	NKA16M4-HF3-AC230/400/415TF	211392
400A	NKA16M4-HF3-AC230/400/415MTF	211393
400A	NKA16M4-PF3-AC220/230/240TF	108276
400A	NKA16M4-PF3-AC220/230/240MTF	192348
400A	NKA16M4-AF3-AC230/400/415TF	108324
400A	NKA16M4-AF3-AC230/400/415MTF	192396
400A	NKA16M4-PF3-AC220/230/240TF	211374
400A	NKA16M4-PF3-AC220/230/240MTF	211375
400A	NKA16M4-PF3-AC230/400/415TF	211376
400A	NKA16M4-PF3-AC230/400/415MTF	211377
200A	NKA16M2-AF3-AC220/230/240TF	108280

NKA-1600 Fixed 3P

Rated Current	Description	Code
200A	NKA1 200S-AF3-AC220/230/240NTF	193222
200A	NKA1 200S-AF3-AC230/400/415TF	108423
200A	NKA1 200S-AF3-AC230/400/415NTF	193200
200A	NKA1 200S-HF3-AC220/230/240TF	211722
200A	NKA1 200S-HF3-AC220/230/240NTF	211723
200A	NKA1 200S-HF3-AC230/400/415TF	211724
200A	NKA1 200S-HF3-AC230/400/415NTF	211725
200A	NKA1 200S-WF3-AC220/230/240TF	108234
200A	NKA1 200S-WF3-AC220/230/240NTF	193254
200A	NKA1 200S-WF3-AC230/400/415TF	108402
200A	NKA1 200S-WF3-AC230/400/415NTF	193204
200A	NKA1 200S-FF3-AC220/230/240TF	211706
200A	NKA1 200S-FF3-AC220/230/240NTF	211707
200A	NKA1 200S-FF3-AC230/400/415TF	211708
200A	NKA1 200S-FF3-AC230/400/415NTF	211709
300A	NKA1 300S-AF3-AC220/230/240TF	108233
300A	NKA1 300S-AF3-AC220/230/240NTF	193203
300A	NKA1 300S-AF3-AC230/400/415TF	108405
300A	NKA1 300S-AF3-AC230/400/415NTF	193208
300A	NKA1 300S-HF3-AC220/230/240TF	211733
300A	NKA1 300S-HF3-AC220/230/240NTF	211735
300A	NKA1 300S-HF3-AC230/400/415TF	211737
300A	NKA1 300S-HF3-AC230/400/415NTF	211737
300A	NKA1 300S-WF3-AC220/230/240TF	108292
300A	NKA1 300S-WF3-AC220/230/240NTF	193253
300A	NKA1 300S-WF3-AC230/400/415TF	108440
300A	NKA1 300S-WF3-AC230/400/415NTF	193212
300A	NKA1 300S-FF3-AC220/230/240TF	211738
300A	NKA1 300S-FF3-AC220/230/240NTF	211739
300A	NKA1 300S-FF3-AC230/400/415TF	211740
300A	NKA1 300S-FF3-AC230/400/415NTF	211741
1000A	NKA1 1000S-AF3-AC220/230/240TF	108294
1000A	NKA1 1000S-AF3-AC220/230/240NTF	193263
1000A	NKA1 1000S-AF3-AC230/400/415TF	108444
1000A	NKA1 1000S-AF3-AC230/400/415NTF	193215
1000A	NKA1 1000S-HF3-AC220/230/240TF	211743
1000A	NKA1 1000S-HF3-AC220/230/240NTF	211747
1000A	NKA1 1000S-HF3-AC230/400/415TF	211738
1000A	NKA1 1000S-HF3-AC230/400/415NTF	211739
1000A	NKA1 1000S-WF3-AC220/230/240TF	108400
1000A	NKA1 1000S-WF3-AC220/230/240NTF	193272

NKA-1600 Fixed 3P

Rated Current	Description	Code
1000A	NKA1000S-WF3-AC230/400/415TF	108448
1000A	NKA1000S-WF3-AC230/400/415NTF	193220
1000A	NKA1000S-FF3-AC220/230/240TF	211770
1000A	NKA1000S-FF3-AC220/230/240NTF	211771
1000A	NKA1000S-FF3-AC230/400/415TF	211772
1000A	NKA1000S-FF3-AC230/400/415NTF	211773
1250A	NKA1250S-AF3-AC220/230/240TF	108404
1250A	NKA1250S-AF3-AC220/230/240-3P1-NTF	308724
1250A	NKA1250S-AF3-AC220/230/240NTF	193276
1250A	NKA1250S-AF3-AC230/400/415TF	108432
1250A	NKA1250S-AF3-AC230/400/415NTF	193224
1250A	NKA1250S-HF3-AC220/230/240TF	211818
1250A	NKA1250S-HF3-AC220/230/240NTF	211819
1250A	NKA1250S-HF3-AC230/400/415TF	211820
1250A	NKA1250S-HF3-AC230/400/415NTF	211821
1250A	NKA1250S-WF3-AC220/230/240TF	108408
1250A	NKA1250S-WF3-AC220/230/240NTF	193280
1250A	NKA1250S-WF3-AC230/400/415TF	108436
1250A	NKA1250S-WF3-AC230/400/415NTF	193228
1250A	NKA1250S-FF3-AC220/230/240TF	211802
1250A	NKA1250S-FF3-AC220/230/240NTF	211803
1250A	NKA1250S-FF3-AC230/400/415TF	211804
1250A	NKA1250S-FF3-AC230/400/415NTF	211805
1600A	NKA1600S-AF3-AC220/230/240TF	108412
1600A	NKA1600S-AF3-AC220/230/240-3P1-NTF	308725
1600A	NKA1600S-AF3-AC220/230/240NTF	193234
1600A	NKA1600S-AF3-AC230/400/415TF	108460
1600A	NKA1600S-AF3-AC230/400/415NTF	193230
1600A	NKA1600S-HF3-AC220/230/240TF	211830
1600A	NKA1600S-HF3-AC220/230/240NTF	211831
1600A	NKA1600S-HF3-AC230/400/415TF	211832
1600A	NKA1600S-HF3-AC230/400/415NTF	211833
1600A	NKA1600S-WF3-AC220/230/240TF	108438
1600A	NKA1600S-WF3-AC220/230/240NTF	193238
1600A	NKA1600S-WF3-AC230/400/415TF	108464
1600A	NKA1600S-WF3-AC230/400/415NTF	193236
1600A	NKA1600S-FF3-AC220/230/240TF	211834
1600A	NKA1600S-FF3-AC220/230/240NTF	211835
1600A	NKA1600S-FF3-AC230/400/415TF	211836
1600A	NKA1600S-FF3-AC230/400/415NTF	211837

NKA-1600 Fixed 4P

Rated Current	Description	Code
400A	NKA16H04-AF4-AC220/230/240T	940002
400A	NKA16H04-AF4-AC220/230/240ATP	942429
400A	NKA16H04-AF4-AC280/400/415T	940031
400A	NKA16H04-AF4-AC280/400/415ATP	942477
400A	NKA16H04-AF4-BC110T	940099
400A	NKA16H04-AF4-BC110ATP	942525
400A	NKA16H04-AF4-BC220T	940147
400A	NKA16H04-AF4-BC220ATP	942573
400A	NKA16H04-HF4-AC220/230/240T	210924
400A	NKA16H04-HF4-AC220/230/240ATP	210925
400A	NKA16H04-HF4-AC280/400/415T	210926
400A	NKA16H04-HF4-AC280/400/415ATP	210927
400A	NKA16H04-HF4-BC110T	210928
400A	NKA16H04-HF4-BC110ATP	210929
400A	NKA16H04-HF4-BC220T	210948
400A	NKA16H04-HF4-BC220ATP	210949
400A	NKA16H04-AF4-AC220/230/240T	940007
400A	NKA16H04-AF4-AC220/230/240ATP	942432
400A	NKA16H04-AF4-AC280/400/415T	940033
400A	NKA16H04-AF4-AC280/400/415ATP	942481
400A	NKA16H04-AF4-BC110T	940102
400A	NKA16H04-AF4-BC110ATP	942439
400A	NKA16H04-AF4-BC220T	940131
400A	NKA16H04-AF4-BC220ATP	942577
400A	NKA16H04-PF4-AC220/230/240T	210902
400A	NKA16H04-PF4-AC220/230/240ATP	210903
400A	NKA16H04-PF4-AC280/400/415T	210904
400A	NKA16H04-PF4-AC280/400/415ATP	210905
400A	NKA16H04-PF4-BC110T	210906
400A	NKA16H04-PF4-BC110ATP	210907
400A	NKA16H04-PF4-BC220T	210908
400A	NKA16H04-PF4-BC220ATP	210909
320A	NKA16H04-AF4-AC220/230/240T	940011
320A	NKA16H04-AF4-AC220/230/240ATP	942427
320A	NKA16H04-AF4-AC280/400/415T	940039
320A	NKA16H04-AF4-AC280/400/415ATP	942483
320A	NKA16H04-AF4-BC110T	940107
320A	NKA16H04-AF4-BC110ATP	942523
320A	NKA16H04-AF4-BC220T	940133
320A	NKA16H04-AF4-BC220ATP	942581
320A	NKA16H04-HF4-AC220/230/240T	210998

NKA-1600 Fixed 4P

Rated Current	Description	Code
320A	NKA16H04-HF4-AC220/230/240ATP	210999
320A	NKA16H04-HF4-AC280/400/415T	211020
320A	NKA16H04-HF4-AC280/400/415ATP	211021
320A	NKA16H04-HF4-BC110T	211022
320A	NKA16H04-HF4-BC110ATP	211023
320A	NKA16H04-HF4-BC220T	211024
320A	NKA16H04-HF4-BC220ATP	211025
320A	NKA16H04-AF4-AC220/230/240T	940015
320A	NKA16H04-AF4-AC220/230/240ATP	942484
320A	NKA16H04-AF4-AC280/400/415T	940062
320A	NKA16H04-AF4-AC280/400/415ATP	942489
320A	NKA16H04-AF4-BC110T	940111
320A	NKA16H04-AF4-BC110ATP	942527
320A	NKA16H04-AF4-BC220T	940139
320A	NKA16H04-AF4-BC220ATP	942582
320A	NKA16H04-PF4-AC220/230/240T	210956
320A	NKA16H04-PF4-AC220/230/240ATP	210957
320A	NKA16H04-PF4-AC280/400/415T	210958
320A	NKA16H04-PF4-AC280/400/415ATP	210959
320A	NKA16H04-PF4-BC110T	210970
320A	NKA16H04-PF4-BC110ATP	210971
320A	NKA16H04-PF4-BC220T	210972
320A	NKA16H04-PF4-BC220ATP	210973
300A	NKA16H04-AF4-AC220/230/240T	940019
300A	NKA16H04-AF4-AC220/230/240ATP	942445
300A	NKA16H04-AF4-AC280/400/415T	940067
300A	NKA16H04-AF4-AC280/400/415ATP	942490
300A	NKA16H04-AF4-BC110T	940113
300A	NKA16H04-AF4-BC110ATP	942540
300A	NKA16H04-AF4-BC220T	940120
300A	NKA16H04-AF4-BC220ATP	942589
300A	NKA16H04-HF4-AC220/230/240T	211032
300A	NKA16H04-HF4-AC220/230/240ATP	211033
300A	NKA16H04-HF4-AC280/400/415T	211034
300A	NKA16H04-HF4-AC280/400/415ATP	211035
300A	NKA16H04-HF4-BC110T	211036
300A	NKA16H04-HF4-BC110ATP	211037
300A	NKA16H04-HF4-BC220T	211038
300A	NKA16H04-HF4-BC220ATP	211039
300A	NKA16H04-AF4-AC220/230/240T	940020
300A	NKA16H04-AF4-AC220/230/240ATP	942449

NKA-1600 Fixed 4P

Rated Current	Description	Code
300A	NKA16 H00-A Fa-AC200/400/41.5TF	940071
300A	NKA16 H00-A Fa-AC200/400/41.5MTF	942497
300A	NKA16 H00-A Fa-BC110TF	940119
300A	NKA16 H00-A Fa-BC110MTF	942545
300A	NKA16 H00-A Fa-BC220TF	940137
300A	NKA16 H00-A Fa-BC220MTF	942593
300A	NKA16 H00-F Fa-AC220/230/240TF	211040
300A	NKA16 H00-F Fa-AC220/230/240MTF	211051
300A	NKA16 H00-F Fa-AC200/400/41.5TF	211032
300A	NKA16 H00-F Fa-AC200/400/41.5MTF	211033
300A	NKA16 H00-F Fa-BC110TF	211034
300A	NKA16 H00-F Fa-BC110MTF	211035
300A	NKA16 H00-F Fa-BC220TF	211036
300A	NKA16 H00-F Fa-BC220MTF	211037
1000A	NKA16 H10-A Fa-AC220/230/240TF	940027
1000A	NKA16 H10-A Fa-AC220/230/240MTF	942430
1000A	NKA16 H10-A Fa-AC200/400/41.5TF	940073
1000A	NKA16 H10-A Fa-AC200/400/41.5MTF	942501
1000A	NKA16 H10-A Fa-BC110TF	940123
1000A	NKA16 H10-A Fa-BC110MTF	942549
1000A	NKA16 H10-A Fa-BC220TF	940171
1000A	NKA16 H10-A Fa-BC220MTF	942597
1000A	NKA16 H10-H Fa-AC220/230/240TF	211145
1000A	NKA16 H10-H Fa-AC220/230/240MTF	211147
1000A	NKA16 H10-H Fa-AC200/400/41.5TF	211148
1000A	NKA16 H10-H Fa-AC200/400/41.5MTF	211149
1000A	NKA16 H10-H Fa-BC110TF	211130
1000A	NKA16 H10-H Fa-BC110MTF	211131
1000A	NKA16 H10-H Fa-BC220TF	211132
1000A	NKA16 H10-H Fa-BC220MTF	211133
1000A	NKA16 H10-A Fa-AC220/230/240TF	940021
1000A	NKA16 H10-A Fa-AC220/230/240MTF	942437
1000A	NKA16 H10-A Fa-AC200/400/41.5TF	940079
1000A	NKA16 H10-A Fa-AC200/400/41.5MTF	942503
1000A	NKA16 H10-A Fa-BC110TF	940177
1000A	NKA16 H10-A Fa-BC110MTF	942553
1000A	NKA16 H10-A Fa-BC220TF	940175
1000A	NKA16 H10-A Fa-BC220MTF	942601
1000A	NKA16 H10-F Fa-AC220/230/240TF	211174
1000A	NKA16 H10-F Fa-AC220/230/240MTF	211175
1000A	NKA16 H10-F Fa-AC200/400/41.5TF	211176

NKA-1600 Fixed 4P

Rated Current	Description	Code
1000A	NKA16 H10-FFa-AC200/400/41.5MTF	211177
1000A	NKA16 H10-FFa-BC110TF	211178
1000A	NKA16 H10-FFa-BC110MTF	211179
1000A	NKA16 H10-FFa-BC220TF	211180
1000A	NKA16 H10-FFa-BC220MTF	211181
1250A	NKA16 H12-A Fa-AC220/230/240TF	940025
1250A	NKA16 H12-A Fa-AC220/230/240MTF	942481
1250A	NKA16 H12-A Fa-AC200/400/41.5TF	940083
1250A	NKA16 H12-A Fa-AC200/400/41.5MTF	942509
1250A	NKA16 H12-A Fa-BC110TF	940131
1250A	NKA16 H12-A Fa-BC110MTF	942557
1250A	NKA16 H12-A Fa-BC220TF	940179
1250A	NKA16 H12-A Fa-BC220MTF	942603
1250A	NKA16 H12-H Fa-AC220/230/240TF	211210
1250A	NKA16 H12-H Fa-AC220/230/240MTF	211211
1250A	NKA16 H12-H Fa-AC200/400/41.5TF	211212
1250A	NKA16 H12-H Fa-AC200/400/41.5MTF	211213
1250A	NKA16 H12-H Fa-BC110TF	211214
1250A	NKA16 H12-H Fa-BC110MTF	211215
1250A	NKA16 H12-H Fa-BC220TF	211216
1250A	NKA16 H12-H Fa-BC220MTF	211217
1250A	NKA16 H12-W Fa-AC220/230/240TF	940029
1250A	NKA16 H12-W Fa-AC220/230/240MTF	942485
1250A	NKA16 H12-W Fa-AC200/400/41.5TF	940097
1250A	NKA16 H12-W Fa-AC200/400/41.5MTF	942513
1250A	NKA16 H12-W Fa-BC110TF	940125
1250A	NKA16 H12-W Fa-BC110MTF	942561
1250A	NKA16 H12-W Fa-BC220TF	940183
1250A	NKA16 H12-W Fa-BC220MTF	942609
1250A	NKA16 H12-FFa-AC220/230/240TF	211172
1250A	NKA16 H12-FFa-AC220/230/240MTF	211173
1250A	NKA16 H12-FFa-AC200/400/41.5TF	211182
1250A	NKA16 H12-FFa-AC200/400/41.5MTF	211183
1250A	NKA16 H12-FFa-BC110TF	211184
1250A	NKA16 H12-FFa-BC110MTF	211185
1600A	NKA16 H16-A Fa-AC220/230/240TF	940023
1600A	NKA16 H16-A Fa-AC220/230/240MTF	942489
1600A	NKA16 H16-A Fa-AC200/400/41.5TF	940091
1600A	NKA16 H16-A Fa-AC200/400/41.5MTF	942517

NKA-1600 Fixed 4P

Rated Current	Description	Code
1600A	NKA16 H1S-AF4-BC110TP	940139
1600A	NKA16 H1S-AF4-BC110ANTP	942545
1600A	NKA16 H1S-AF4-BC220TP	940137
1600A	NKA16 H1S-AF4-BC220ANTP	942543
1600A	NKA16 H1S-HF4-AC220/230/240TP	911274
1600A	NKA16 H1S-HF4-AC220/230/240ANTP	911275
1600A	NKA16 H1S-HF4-AC220/240/415TP	911276
1600A	NKA16 H1S-HF4-AC220/240/415ANTP	911277
1600A	NKA16 H1S-HF4-BC110TP	911278
1600A	NKA16 H1S-HF4-BC110ANTP	911279
1600A	NKA16 H1S-HF4-BC220TP	911280
1600A	NKA16 H1S-HF4-BC220ANTP	911281
1600A	NKA16 H1S-WF4-AC220/230/240TP	940097
1600A	NKA16 H1S-WF4-AC220/230/240ANTP	942547
1600A	NKA16 H1S-WF4-AC220/240/415TP	940095
1600A	NKA16 H1S-WF4-AC220/240/415ANTP	942549
1600A	NKA16 H1S-WF4-BC110TP	940140
1600A	NKA16 H1S-WF4-BC110ANTP	942549
1600A	NKA16 H1S-WF4-BC220TP	940191
1600A	NKA16 H1S-WF4-BC220ANTP	942547
1600A	NKA16 H1S-HF4-AC220/230/240TP	911242
1600A	NKA16 H1S-HF4-AC220/230/240ANTP	911243
1600A	NKA16 H1S-HF4-AC220/240/415TP	911244
1600A	NKA16 H1S-HF4-AC220/240/415ANTP	911245
1600A	NKA16 H1S-HF4-BC110TP	911246
1600A	NKA16 H1S-HF4-BC110ANTP	911247
1600A	NKA16 H1S-HF4-BC220TP	911248
1600A	NKA16 H1S-HF4-BC220ANTP	911249
400A	NKA16 H0S-AF4-AC220/230/240TP	940193
400A	NKA16 H0S-AF4-AC220/230/240ANTP	942551
400A	NKA16 H0S-AF4-AC220/240/415TP	940243
400A	NKA16 H0S-AF4-AC220/240/415ANTP	942549
400A	NKA16 H0S-AF4-BC110TP	940291
400A	NKA16 H0S-AF4-BC110ANTP	942547
400A	NKA16 H0S-AF4-BC220TP	940239
400A	NKA16 H0S-AF4-BC220ANTP	942545
400A	NKA16 H0S-HF4-AC220/230/240TP	911238
400A	NKA16 H0S-HF4-AC220/230/240ANTP	911239
400A	NKA16 H0S-HF4-AC220/240/415TP	911240
400A	NKA16 H0S-HF4-AC220/240/415ANTP	911241
400A	NKA16 H0S-HF4-BC110TP	911242

NKA-1600 Fixed 4P

Rated Current	Description	Code
400A	NKA16 H0S-HF4-BC110ANTP	911242
400A	NKA16 H0S-HF4-BC220TP	911244
400A	NKA16 H0S-HF4-BC220ANTP	911245
400A	NKA16 H0S-WF4-AC220/230/240TP	940199
400A	NKA16 H0S-WF4-AC220/230/240ANTP	942553
400A	NKA16 H0S-WF4-AC220/240/415TP	940247
400A	NKA16 H0S-WF4-AC220/240/415ANTP	942551
400A	NKA16 H0S-WF4-BC110TP	940293
400A	NKA16 H0S-WF4-BC110ANTP	942551
400A	NKA16 H0S-WF4-BC220TP	940343
400A	NKA16 H0S-WF4-BC220ANTP	942549
400A	NKA16 H0S-HF4-AC220/230/240TP	911206
400A	NKA16 H0S-HF4-AC220/230/240ANTP	911207
400A	NKA16 H0S-HF4-AC220/240/415TP	911208
400A	NKA16 H0S-HF4-AC220/240/415ANTP	911209
400A	NKA16 H0S-HF4-BC110TP	911210
400A	NKA16 H0S-HF4-BC110ANTP	911211
400A	NKA16 H0S-HF4-BC220TP	911212
400A	NKA16 H0S-HF4-BC220ANTP	911213
400A	NKA16 H0S-AF4-AC220/230/240TP	940202
400A	NKA16 H0S-AF4-AC220/230/240ANTP	942529
400A	NKA16 H0S-AF4-AC220/240/415TP	940251
400A	NKA16 H0S-AF4-AC220/240/415ANTP	942547
400A	NKA16 H0S-AF4-BC110TP	940299
400A	NKA16 H0S-AF4-BC110ANTP	942545
400A	NKA16 H0S-AF4-BC220TP	940247
400A	NKA16 H0S-AF4-BC220ANTP	942543
400A	NKA16 H0S-HF4-AC220/230/240TP	911402
400A	NKA16 H0S-HF4-AC220/230/240ANTP	911403
400A	NKA16 H0S-HF4-AC220/240/415TP	911404
400A	NKA16 H0S-HF4-AC220/240/415ANTP	911405
400A	NKA16 H0S-HF4-BC110TP	911406
400A	NKA16 H0S-HF4-BC110ANTP	911407
400A	NKA16 H0S-HF4-BC220TP	911408
400A	NKA16 H0S-HF4-BC220ANTP	911409
400A	NKA16 H0S-WF4-AC220/230/240TP	940207
400A	NKA16 H0S-WF4-AC220/230/240ANTP	942529
400A	NKA16 H0S-WF4-AC220/240/415TP	940255
400A	NKA16 H0S-WF4-AC220/240/415ANTP	942551
400A	NKA16 H0S-WF4-BC110TP	940203
400A	NKA16 H0S-WF4-BC110ANTP	942529

NKA-1600 Fixed 4P

Rated Current	Description	Code
200A	NKA1600S-AP4-DC220T	940201
200A	NKA1600S-AP4-DC220ANT	940202
200A	NKA1600S-FF4-AC220/230/240T	211300
200A	NKA1600S-FF4-AC220/230/240ANT	211301
200A	NKA1600S-FF4-AC380/400/415T	211302
200A	NKA1600S-FF4-AC380/400/415ANT	211303
200A	NKA1600S-FF4-DC110T	211304
200A	NKA1600S-FF4-DC110ANT	211305
200A	NKA1600S-FF4-DC220T	211306
200A	NKA1600S-FF4-DC220ANT	211307
200A	NKA1600S-AP4-AC220/230/240T	940201
200A	NKA1600S-AP4-AC220/230/240ANT	940202
200A	NKA1600S-AP4-AC380/400/415T	940203
200A	NKA1600S-AP4-AC380/400/415ANT	940204
200A	NKA1600S-AP4-DC110T	940205
200A	NKA1600S-AP4-DC110ANT	940206
200A	NKA1600S-AP4-DC220T	940207
200A	NKA1600S-AP4-DC220ANT	940208
200A	NKA1600S-HF4-AC220/230/240T	211404
200A	NKA1600S-HF4-AC220/230/240ANT	211405
200A	NKA1600S-HF4-AC380/400/415T	211406
200A	NKA1600S-HF4-AC380/400/415ANT	211407
200A	NKA1600S-HF4-DC110T	211408
200A	NKA1600S-HF4-DC110ANT	211409
200A	NKA1600S-HF4-DC220T	211410
200A	NKA1600S-HF4-DC220ANT	211411
200A	NKA1600S-AP4-AC220/230/240T	940201
200A	NKA1600S-AP4-AC220/230/240ANT	940202
200A	NKA1600S-AP4-AC380/400/415T	940203
200A	NKA1600S-AP4-AC380/400/415ANT	940204
200A	NKA1600S-AP4-DC110T	940205
200A	NKA1600S-AP4-DC110ANT	940206
200A	NKA1600S-AP4-DC220T	940207
200A	NKA1600S-AP4-DC220ANT	940208
200A	NKA1600S-FF4-AC220/230/240T	211404
200A	NKA1600S-FF4-AC220/230/240ANT	211405
200A	NKA1600S-FF4-AC380/400/415T	211406
200A	NKA1600S-FF4-AC380/400/415ANT	211407
200A	NKA1600S-FF4-DC110T	211408
200A	NKA1600S-FF4-DC110ANT	211409
200A	NKA1600S-FF4-DC220T	211410

NKA-1600 Fixed 4P

Rated Current	Description	Code
200A	NKA1600S-FF4-DC220ANT	211307
1000A	NKA1601D-AP4-AC220/230/240T	940209
1000A	NKA1601D-AP4-AC220/230/240ANT	940210
1000A	NKA1601D-AP4-AC380/400/415T	940211
1000A	NKA1601D-AP4-AC380/400/415ANT	940212
1000A	NKA1601D-AP4-DC110T	940213
1000A	NKA1601D-AP4-DC110ANT	940214
1000A	NKA1601D-AP4-DC220T	940215
1000A	NKA1601D-AP4-DC220ANT	940216
1000A	NKA1601D-HF4-AC220/230/240T	211320
1000A	NKA1601D-HF4-AC220/230/240ANT	211321
1000A	NKA1601D-HF4-AC380/400/415T	211322
1000A	NKA1601D-HF4-AC380/400/415ANT	211323
1000A	NKA1601D-HF4-DC110T	211324
1000A	NKA1601D-HF4-DC110ANT	211325
1000A	NKA1601D-HF4-DC220T	211326
1000A	NKA1601D-HF4-DC220ANT	211327
1000A	NKA1601D-AP4-AC220/230/240T	940217
1000A	NKA1601D-AP4-AC220/230/240ANT	940218
1000A	NKA1601D-AP4-AC380/400/415T	940219
1000A	NKA1601D-AP4-AC380/400/415ANT	940220
1000A	NKA1601D-AP4-DC110T	940221
1000A	NKA1601D-AP4-DC110ANT	940222
1000A	NKA1601D-AP4-DC220T	940223
1000A	NKA1601D-AP4-DC220ANT	940224
1000A	NKA1601D-FF4-AC220/230/240T	211308
1000A	NKA1601D-FF4-AC220/230/240ANT	211309
1000A	NKA1601D-FF4-AC380/400/415T	211310
1000A	NKA1601D-FF4-AC380/400/415ANT	211311
1000A	NKA1601D-FF4-DC110T	211312
1000A	NKA1601D-FF4-DC110ANT	211313
1000A	NKA1601D-FF4-DC220T	211314
1000A	NKA1601D-FF4-DC220ANT	211315
1000A	NKA1601D-FF4-AC220/230/240T	940225
1000A	NKA1601D-FF4-AC220/230/240ANT	940226
1000A	NKA1601D-FF4-AC380/400/415T	940227
1000A	NKA1601D-FF4-AC380/400/415ANT	940228
1000A	NKA1601D-FF4-DC110T	940229
1000A	NKA1601D-FF4-DC110ANT	940230
1000A	NKA1601D-FF4-DC220T	940231
1000A	NKA1601D-FF4-DC220ANT	940232
1000A	NKA1601D-FF4-AC220/230/240T	940233
1000A	NKA1601D-FF4-AC220/230/240ANT	940234
1000A	NKA1601D-FF4-AC380/400/415T	940235
1000A	NKA1601D-FF4-AC380/400/415ANT	940236
1000A	NKA1601D-FF4-DC110T	940237
1000A	NKA1601D-FF4-DC110ANT	940238
1000A	NKA1601D-FF4-DC220T	940239
1000A	NKA1601D-FF4-DC220ANT	940240

NKA-1600 Fixed 4P

Rated Current	Description	Code
1250A	NKA16M12-H Fa-AC220/230/240TF	211594
1250A	NKA16M12-H Fa-AC220/230/240ANTF	211595
1250A	NKA16M12-H Fa-AC220/400/415TF	211596
1250A	NKA16M12-H Fa-AC220/400/415ANTF	211597
1250A	NKA16M12-H Fa-BC110TF	211598
1250A	NKA16M12-H Fa-BC110ANTF	211599
1250A	NKA16M12-H Fa-BC220TF	211600
1250A	NKA16M12-H Fa-BC220ANTF	211601
1250A	NKA16M12-H Fa-AC220/230/240TF	940231
1250A	NKA16M12-H Fa-AC220/230/240ANTF	942637
1250A	NKA16M12-H Fa-AC220/400/415TF	940239
1250A	NKA16M12-H Fa-AC220/400/415ANTF	942638
1250A	NKA16M12-H Fa-BC110TF	940237
1250A	NKA16M12-H Fa-BC110ANTF	942639
1250A	NKA16M12-H Fa-BC220TF	940235
1250A	NKA16M12-H Fa-BC220ANTF	942641
1250A	NKA16M12-F Fa-AC220/230/240TF	211562
1250A	NKA16M12-F Fa-AC220/230/240ANTF	211563
1250A	NKA16M12-F Fa-AC220/400/415TF	211564
1250A	NKA16M12-F Fa-AC220/400/415ANTF	211565
1250A	NKA16M12-F Fa-BC110TF	211566
1250A	NKA16M12-F Fa-BC110ANTF	211567
1250A	NKA16M12-F Fa-BC220TF	211568
1250A	NKA16M12-F Fa-BC220ANTF	211569
1600A	NKA16M16-A Fa-AC220/230/240TF	940235
1600A	NKA16M16-A Fa-AC220/230/240ANTF	942641
1600A	NKA16M16-A Fa-AC220/400/415TF	940233
1600A	NKA16M16-A Fa-AC220/400/415ANTF	942639
1600A	NKA16M16-A Fa-BC110TF	940231
1600A	NKA16M16-A Fa-BC110ANTF	942637
1600A	NKA16M16-A Fa-BC220TF	940239
1600A	NKA16M16-A Fa-BC220ANTF	942643
1600A	NKA16M16-H Fa-AC220/230/240TF	211638
1600A	NKA16M16-H Fa-AC220/230/240ANTF	211639
1600A	NKA16M16-H Fa-AC220/400/415TF	211640
1600A	NKA16M16-H Fa-AC220/400/415ANTF	211641
1600A	NKA16M16-H Fa-BC110TF	211642
1600A	NKA16M16-H Fa-BC110ANTF	211643
1600A	NKA16M16-H Fa-BC220TF	211644
1600A	NKA16M16-H Fa-BC220ANTF	211645
1600A	NKA16M16-H Fa-AC220/230/240TF	940239

NKA-1600 Fixed 4P

Rated Current	Description	Code
1600A	NKA16M16-H Fa-AC220/230/240ANTF	942643
1600A	NKA16M16-H Fa-AC220/400/415TF	940237
1600A	NKA16M16-H Fa-AC220/400/415ANTF	942643
1600A	NKA16M16-H Fa-BC110TF	940235
1600A	NKA16M16-H Fa-BC110ANTF	942641
1600A	NKA16M16-H Fa-BC220TF	940233
1600A	NKA16M16-H Fa-BC220ANTF	942639
1600A	NKA16M16-F Fa-AC220/230/240TF	211626
1600A	NKA16M16-F Fa-AC220/230/240ANTF	211627
1600A	NKA16M16-F Fa-AC220/400/415TF	211628
1600A	NKA16M16-F Fa-AC220/400/415ANTF	211629
1600A	NKA16M16-F Fa-BC110TF	211630
1600A	NKA16M16-F Fa-BC110ANTF	211631
1600A	NKA16M16-F Fa-BC220TF	211632
1600A	NKA16M16-F Fa-BC220ANTF	211633
400A	NKA16S04-A Fa-AC220/230/240TF	108334
400A	NKA16S04-A Fa-AC220/230/240ANTF	192346
400A	NKA16S04-A Fa-AC220/400/415TF	108332
400A	NKA16S04-A Fa-AC220/400/415ANTF	192344
400A	NKA16S04-H Fa-AC220/230/240TF	211694
400A	NKA16S04-H Fa-AC220/230/240ANTF	211695
400A	NKA16S04-H Fa-AC220/400/415TF	211696
400A	NKA16S04-H Fa-AC220/400/415ANTF	211697
400A	NKA16S04-W Fa-AC220/230/240TF	108338
400A	NKA16S04-W Fa-AC220/230/240ANTF	192350
400A	NKA16S04-W Fa-AC220/400/415TF	108336
400A	NKA16S04-W Fa-AC220/400/415ANTF	192348
400A	NKA16S04-F Fa-AC220/230/240TF	211698
400A	NKA16S04-F Fa-AC220/230/240ANTF	211699
400A	NKA16S04-F Fa-AC220/400/415TF	211680
400A	NKA16S04-F Fa-AC220/400/415ANTF	211681
630A	NKA16S06-A Fa-AC220/230/240TF	108382
630A	NKA16S06-A Fa-AC220/230/240ANTF	192354
630A	NKA16S06-A Fa-AC220/400/415TF	108380
630A	NKA16S06-A Fa-AC220/400/415ANTF	192352
630A	NKA16S06-H Fa-AC220/230/240TF	211726
630A	NKA16S06-H Fa-AC220/230/240ANTF	211727
630A	NKA16S06-H Fa-AC220/400/415TF	211728
630A	NKA16S06-H Fa-AC220/400/415ANTF	211729
630A	NKA16S06-W Fa-AC220/230/240TF	108386
630A	NKA16S06-W Fa-AC220/230/240ANTF	192358

NKA-1600 Fixed 4P

Rated Current	Description	Code
400A	NKA1600-4P4-AC220/240/41.5TF	108434
400A	NKA1600-4P4-AC220/240/41.5ANTF	192304
400A	NKA1600-4P4-AC220/230/240TF	211710
400A	NKA1600-4P4-AC220/230/240ANTF	211711
400A	NKA1600-4P4-AC220/240/41.5TF	211712
400A	NKA1600-4P4-AC220/240/41.5ANTF	211713
300A	NKA1600-4P4-AC220/230/240TF	108430
300A	NKA1600-4P4-AC220/230/240ANTF	192302
300A	NKA1600-4P4-AC220/240/41.5TF	108433
300A	NKA1600-4P4-AC220/240/41.5ANTF	192310
300A	NKA1600-4P4-AC220/230/240TF	211728
300A	NKA1600-4P4-AC220/230/240ANTF	211729
300A	NKA1600-4P4-AC220/240/41.5TF	211730
300A	NKA1600-4P4-AC220/240/41.5ANTF	211731
300A	NKA1600-4P4-AC220/230/240TF	108434
300A	NKA1600-4P4-AC220/230/240ANTF	192306
300A	NKA1600-4P4-AC220/240/41.5TF	108435
300A	NKA1600-4P4-AC220/240/41.5ANTF	192314
300A	NKA1600-4P4-AC220/230/240TF	211732
300A	NKA1600-4P4-AC220/230/240ANTF	211733
300A	NKA1600-4P4-AC220/240/41.5TF	211734
300A	NKA1600-4P4-AC220/240/41.5ANTF	211735
300A	NKA1600-4P4-AC220/230/240TF	211736
1000A	NKA1600-4P4-AC220/230/240TF	108436
1000A	NKA1600-4P4-AC220/230/240ANTF	192316
1000A	NKA1600-4P4-AC220/240/41.5TF	108438
1000A	NKA1600-4P4-AC220/240/41.5ANTF	192318
1000A	NKA1600-4P4-AC220/230/240TF	211790
1000A	NKA1600-4P4-AC220/230/240ANTF	211791
1000A	NKA1600-4P4-AC220/240/41.5TF	211792
1000A	NKA1600-4P4-AC220/240/41.5ANTF	211793
1000A	NKA1600-4P4-AC220/230/240TF	108402
1000A	NKA1600-4P4-AC220/230/240ANTF	192319
1000A	NKA1600-4P4-AC220/240/41.5TF	108430
1000A	NKA1600-4P4-AC220/240/41.5ANTF	192322
1000A	NKA1600-4P4-AC220/230/240TF	211794
1000A	NKA1600-4P4-AC220/230/240ANTF	211795
1000A	NKA1600-4P4-AC220/240/41.5TF	211796
1000A	NKA1600-4P4-AC220/240/41.5ANTF	211797
1250A	NKA1600-4P4-AC220/230/240TF	108403
1250A	NKA1600-4P4-AC220/230/240ANTF	192324
1250A	NKA1600-4P4-AC220/240/41.5TF	108434

NKA-1600 Fixed 4P

Rated Current	Description	Code
1250A	NKA1600-4P4-AC220/230/240ANTF	192326
1250A	NKA1600-4P4-AC220/230/240TF	211822
1250A	NKA1600-4P4-AC220/230/240ANTF	211823
1250A	NKA1600-4P4-AC220/240/41.5TF	211824
1250A	NKA1600-4P4-AC220/240/41.5ANTF	211825
1250A	NKA1600-4P4-AC220/230/240TF	108410
1250A	NKA1600-4P4-AC220/230/240ANTF	192303
1250A	NKA1600-4P4-AC220/240/41.5TF	108438
1250A	NKA1600-4P4-AC220/240/41.5ANTF	192310
1250A	NKA1600-4P4-AC220/230/240TF	211803
1250A	NKA1600-4P4-AC220/230/240ANTF	211804
1250A	NKA1600-4P4-AC220/240/41.5TF	211808
1250A	NKA1600-4P4-AC220/240/41.5ANTF	211809
1600A	NKA1600-4P4-AC220/230/240TF	108414
1600A	NKA1600-4P4-AC220/230/240ANTF	192305
1600A	NKA1600-4P4-AC220/240/41.5TF	108442
1600A	NKA1600-4P4-AC220/240/41.5ANTF	192314
1600A	NKA1600-4P4-AC220/230/240TF	211834
1600A	NKA1600-4P4-AC220/230/240ANTF	211835
1600A	NKA1600-4P4-AC220/240/41.5TF	211836
1600A	NKA1600-4P4-AC220/240/41.5ANTF	211837
1600A	NKA1600-4P4-AC220/230/240TF	108418
1600A	NKA1600-4P4-AC220/230/240ANTF	192319
1600A	NKA1600-4P4-AC220/240/41.5TF	108436
1600A	NKA1600-4P4-AC220/240/41.5ANTF	192328
1600A	NKA1600-4P4-AC220/230/240TF	211828
1600A	NKA1600-4P4-AC220/230/240ANTF	211829
1600A	NKA1600-4P4-AC220/240/41.5TF	211840
1600A	NKA1600-4P4-AC220/240/41.5ANTF	211841

NKA-1600 Withdrawable 3P

Rated Current	Description	Code
400A	NKA16R04-ABD-AC220/230/240TF	940000
400A	NKA16R04-ABD-AC220/230/240WTF	942424
400A	NKA16R04-ABD-AC230/240/241.5TF	940043
400A	NKA16R04-ABD-AC230/240/241.5WTF	942474
400A	NKA16R04-ABD-DC110TF	940096
400A	NKA16R04-ABD-DC110WTF	942522
400A	NKA16R04-ABD-DC220TF	940144
400A	NKA16R04-ABD-DC220WTF	942570
400A	NKA16R04-RBD-AC220/230/240TF	210910
400A	NKA16R04-RBD-AC220/230/240WTF	210911
400A	NKA16R04-RBD-AC230/240/241.5TF	210912
400A	NKA16R04-RBD-AC230/240/241.5WTF	210913
400A	NKA16R04-RBD-DC110TF	210914
400A	NKA16R04-RBD-DC110WTF	210915
400A	NKA16R04-RBD-DC220TF	210916
400A	NKA16R04-RBD-DC220WTF	210917
400A	NKA16R04-ABD3-AC220/230/240TF	940004
400A	NKA16R04-ABD3-AC220/230/240WTF	942420
400A	NKA16R04-ABD3-AC220/230/240A3P1H TF	244522
400A	NKA16R04-ABD3-AC230/240/241.5TF	940052
400A	NKA16R04-ABD3-AC230/240/241.5WTF	942472
400A	NKA16R04-ABD3-DC110TF	940100
400A	NKA16R04-ABD3-DC110WTF	942526
400A	NKA16R04-ABD3-DC220TF	940143
400A	NKA16R04-ABD3-DC220WTF	942574
400A	NKA16R04-RBD-AC220/230/240TF	210878
400A	NKA16R04-RBD-AC220/230/240WTF	210879
400A	NKA16R04-RBD-AC230/240/241.5TF	210880
400A	NKA16R04-RBD-AC230/240/241.5WTF	210881
400A	NKA16R04-RBD-DC110TF	210882
400A	NKA16R04-RBD-DC110WTF	210883
400A	NKA16R04-RBD-DC220TF	210884
400A	NKA16R04-RBD-DC220WTF	210885
400A	NKA16R04-ABD-AC220/230/240TF	940008
400A	NKA16R04-ABD-AC220/230/240WTF	942424
400A	NKA16R04-ABD-AC230/240/241.5TF	940054
400A	NKA16R04-ABD-AC230/240/241.5WTF	942476
400A	NKA16R04-ABD-AC230/240/241.5A3P1H TF	244547
400A	NKA16R04-ABD-AC230/240/241.5WTF	942482
400A	NKA16R04-ABD-AC230/240/241.5A3P1H TF	244548
400A	NKA16R04-ABD-DC110TF	940104
400A	NKA16R04-ABD-DC110WTF	942520

NKA-1600 Withdrawable 3P

Rated Current	Description	Code
400A	NKA16R04-ABD-DC220TF	940152
400A	NKA16R04-ABD-DC220WTF	942572
400A	NKA16R04-RBD-AC220/230/240TF	210914
400A	NKA16R04-RBD-AC220/230/240WTF	210915
400A	NKA16R04-RBD-AC230/240/241.5TF	210916
400A	NKA16R04-RBD-AC230/240/241.5WTF	210917
400A	NKA16R04-RBD-DC110TF	210918
400A	NKA16R04-RBD-DC110WTF	210919
400A	NKA16R04-RBD-DC220TF	210920
400A	NKA16R04-RBD-DC220WTF	210921
400A	NKA16R04-ABD3-AC220/230/240TF	940012
400A	NKA16R04-ABD3-AC220/230/240WTF	942428
400A	NKA16R04-ABD3-AC220/230/240A3P1H TF	244523
400A	NKA16R04-ABD3-AC230/240/241.5TF	940060
400A	NKA16R04-ABD3-AC230/240/241.5WTF	942486
400A	NKA16R04-ABD3-DC110TF	940108
400A	NKA16R04-ABD3-DC110WTF	942534
400A	NKA16R04-ABD3-DC220TF	940154
400A	NKA16R04-ABD3-DC220WTF	942582
400A	NKA16R04-RBD-AC220/230/240TF	210922
400A	NKA16R04-RBD-AC220/230/240WTF	210923
400A	NKA16R04-RBD-AC230/240/241.5TF	210924
400A	NKA16R04-RBD-AC230/240/241.5WTF	210925
400A	NKA16R04-RBD-DC110TF	210926
400A	NKA16R04-RBD-DC110WTF	210927
400A	NKA16R04-RBD-DC220TF	210928
400A	NKA16R04-RBD-DC220WTF	210929
300A	NKA16R03-ABD-AC220/230/240TF	940016
300A	NKA16R03-ABD-AC220/230/240WTF	942432
300A	NKA16R03-ABD-AC230/240/241.5TF	940064
300A	NKA16R03-ABD-AC230/240/241.5WTF	942490
300A	NKA16R03-ABD-DC110TF	940112
300A	NKA16R03-ABD-DC110WTF	942538
300A	NKA16R03-ABD-DC220TF	940160
300A	NKA16R03-ABD-DC220WTF	942586
300A	NKA16R03-RBD-AC220/230/240TF	210938
300A	NKA16R03-RBD-AC220/230/240WTF	210939
300A	NKA16R03-RBD-AC230/240/241.5TF	210940
300A	NKA16R03-RBD-AC230/240/241.5WTF	210941
300A	NKA16R03-RBD-DC110TF	210942
300A	NKA16R03-RBD-DC110WTF	210943

NKA-1600 Withdrawable 3P

Rated Current	Description	Code
800A	NKA16 H00-H B3-DC220TP	211084
800A	NKA16 H00-H B3-DC220ANTP	211085
800A	NKA16 H00-W B3-AC220/230/240TP	940020
800A	NKA16 H00-W B3-AC220/230/240ANTP	942466
800A	NKA16 H00-W B3-AC220/230/240W3P1HTP	267824
800A	NKA16 H00-W B3-AC220/240/415TP	940069
800A	NKA16 H00-W B3-AC220/240/415ANTP	942494
800A	NKA16 H00-W B3-DC110TP	940116
800A	NKA16 H00-W B3-DC110ANTP	942542
800A	NKA16 H00-W B3-DC220TP	940164
800A	NKA16 H00-W B3-DC220ANTP	942590
800A	NKA16 H00-F B3-AC220/230/240TP	211026
800A	NKA16 H00-F B3-AC220/230/2403P1HTP	292079
800A	NKA16 H00-F B3-AC220/230/240ANTP	211027
800A	NKA16 H00-F B3-AC220/240/415TP	211028
800A	NKA16 H00-F B3-AC220/240/415ANTP	211029
800A	NKA16 H00-F B3-DC110TP	211030
800A	NKA16 H00-F B3-DC110ANTP	211031
800A	NKA16 H00-F B3-DC220TP	211032
800A	NKA16 H00-F B3-DC220ANTP	211033
1000A	NKA16 H10-A B3-AC220/230/240TP	940024
1000A	NKA16 H10-A B3-AC220/230/240ANTP	942480
1000A	NKA16 H10-A B3-AC220/240/415TP	940072
1000A	NKA16 H10-A B3-AC220/240/415ANTP	942498
1000A	NKA16 H10-A B3-DC110TP	940120
1000A	NKA16 H10-A B3-DC110ANTP	942546
1000A	NKA16 H10-A B3-DC220TP	940168
1000A	NKA16 H10-A B3-DC220ANTP	942594
1000A	NKA16 H10-H B3-AC220/230/240TP	211122
1000A	NKA16 H10-H B3-AC220/230/2403P1HTP	292078
1000A	NKA16 H10-H B3-AC220/230/240ANTP	211123
1000A	NKA16 H10-H B3-AC220/240/415TP	211124
1000A	NKA16 H10-H B3-AC220/240/415ANTP	211125
1000A	NKA16 H10-H B3-DC110TP	211126
1000A	NKA16 H10-H B3-DC110ANTP	211127
1000A	NKA16 H10-H B3-DC220TP	211128
1000A	NKA16 H10-H B3-DC220ANTP	211129
1000A	NKA16 H10-W B3-AC220/230/240TP	940023
1000A	NKA16 H10-W B3-AC220/230/240ANTP	942458
1000A	NKA16 H10-W B3-AC220/230/240W3P1HTP	267825
1000A	NKA16 H10-W B3-AC220/240/415TP	940076

NKA-1600 Withdrawable 3P

Rated Current	Description	Code
1000A	NKA16 H10-W B3-AC220/240/415ANTP	942502
1000A	NKA16 H10-W B3-DC110TP	940124
1000A	NKA16 H10-W B3-DC110ANTP	942530
1000A	NKA16 H10-W B3-DC220TP	940172
1000A	NKA16 H10-W B3-DC220ANTP	942598
1000A	NKA16 H10-F B3-AC220/230/240TP	211090
1000A	NKA16 H10-F B3-AC220/230/240ANTP	211091
1000A	NKA16 H10-F B3-AC220/240/415TP	211092
1000A	NKA16 H10-F B3-AC220/240/415ANTP	211093
1000A	NKA16 H10-F B3-DC110TP	211094
1000A	NKA16 H10-F B3-DC110ANTP	211095
1000A	NKA16 H10-F B3-DC220TP	211096
1000A	NKA16 H10-F B3-DC220ANTP	211097
1250A	NKA16 H12-AB3-AC220/230/240TP	940032
1250A	NKA16 H12-AB3-AC220/230/240ANTP	942488
1250A	NKA16 H12-AB3-AC220/240/415TP	940080
1250A	NKA16 H12-AB3-AC220/240/415ANTP	942496
1250A	NKA16 H12-AB3-DC110TP	940128
1250A	NKA16 H12-AB3-DC110ANTP	942554
1250A	NKA16 H12-AB3-DC220TP	940176
1250A	NKA16 H12-AB3-DC220ANTP	942602
1250A	NKA16 H12-H B3-AC220/230/240TP	211136
1250A	NKA16 H12-H B3-AC220/230/2403P1HTP	292077
1250A	NKA16 H12-H B3-AC220/230/240ANTP	211137
1250A	NKA16 H12-H B3-AC220/240/415TP	211138
1250A	NKA16 H12-H B3-AC220/240/415ANTP	211139
1250A	NKA16 H12-H B3-DC110TP	211190
1250A	NKA16 H12-H B3-DC110ANTP	211191
1250A	NKA16 H12-H B3-DC220TP	211192
1250A	NKA16 H12-H B3-DC220ANTP	211193
1250A	NKA16 H12-W B3-AC220/230/240TP	940036
1250A	NKA16 H12-W B3-AC220/230/240ANTP	942492
1250A	NKA16 H12-W B3-AC220/240/415W3P1HTP	267826
1250A	NKA16 H12-W B3-AC220/240/415TP	940084
1250A	NKA16 H12-W B3-AC220/240/415ANTP	942510
1250A	NKA16 H12-W B3-DC110TP	940132
1250A	NKA16 H12-W B3-DC110ANTP	942536
1250A	NKA16 H12-W B3-DC220TP	940180
1250A	NKA16 H12-W B3-DC220ANTP	942606
1250A	NKA16 H12-F B3-AC220/230/240TP	211134
1250A	NKA16 H12-F B3-AC220/230/240ANTP	211135

NKA-1600 Withdrawable 3P

Rated Current	Description	Code
1250A	NKA1-6 H12-PB3-AC280/400/41.5TF	211133
1250A	NKA1-6 H12-PB3-AC280/400/41.5WTF	211137
1250A	NKA1-6 H12-PB3-BC110TF	211138
1250A	NKA1-6 H12-PB3-BC110WTF	211139
1250A	NKA1-6 H12-PB3-BC220TF	211140
1250A	NKA1-6 H12-PB3-BC220WTF	211141
1600A	NKA1-6 H16-AB3-AC220/230/240TF	940040
1600A	NKA1-6 H16-AB3-AC220/230/240WTF	942466
1600A	NKA1-6 H16-AB3-AC280/400/41.5TF	940088
1600A	NKA1-6 H16-AB3-AC280/400/41.5WTF	942519
1600A	NKA1-6 H16-AB3-BC110TF	940126
1600A	NKA1-6 H16-AB3-BC110WTF	942562
1600A	NKA1-6 H16-AB3-BC220TF	940134
1600A	NKA1-6 H16-AB3-BC220WTF	942510
1600A	NKA1-6 H16-H BD-AC220/230/240TF	211230
1600A	NKA1-6 H16-H BD-AC220/230/240-BC110WTF	2992076
1600A	NKA1-6 H16-H BD-AC220/230/240WTF	211231
1600A	NKA1-6 H16-H BD-AC220/400/41.5TF	211232
1600A	NKA1-6 H16-H BD-AC220/400/41.5WTF	211233
1600A	NKA1-6 H16-H BD-BC110TF	211234
1600A	NKA1-6 H16-H BD-BC110WTF	211235
1600A	NKA1-6 H16-H BD-BC220TF	211236
1600A	NKA1-6 H16-H BD-BC220WTF	211237
1600A	NKA1-6 H16-W BD-AC220/230/240TF	940044
1600A	NKA1-6 H16-W BD-AC220/230/240WTF	942470
1600A	NKA1-6 H16-W BD-AC220/230/240W40-BC110WTF	227327
1600A	NKA1-6 H16-W BD-AC280/400/41.5TF	940092
1600A	NKA1-6 H16-W BD-AC280/400/41.5WTF	942518
1600A	NKA1-6 H16-W BD-BC110TF	940140
1600A	NKA1-6 H16-W BD-BC110WTF	942568
1600A	NKA1-6 H16-W BD-BC220TF	940138
1600A	NKA1-6 H16-W BD-BC220WTF	942516
1600A	NKA1-6 H16-PB3-AC220/230/240TF	211218
1600A	NKA1-6 H16-PB3-AC220/230/240WTF	211219
1600A	NKA1-6 H16-PB3-AC280/400/41.5TF	211220
1600A	NKA1-6 H16-PB3-AC280/400/41.5WTF	211221
1600A	NKA1-6 H16-PB3-BC110TF	211222
1600A	NKA1-6 H16-PB3-BC110WTF	211223
1600A	NKA1-6 H16-PB3-BC220TF	211224
1600A	NKA1-6 H16-PB3-BC220WTF	211225
400A	NKA1-6 H04-AB3-AC220/230/240TF	940192

NKA-1600 Withdrawable 3P

Rated Current	Description	Code
400A	NKA1-6 H04-AB3-AC220/230/240WTF	942618
400A	NKA1-6 H04-AB3-AC280/400/41.5TF	940240
400A	NKA1-6 H04-AB3-AC280/400/41.5WTF	942666
400A	NKA1-6 H04-AB3-BC110TF	940288
400A	NKA1-6 H04-AB3-BC110WTF	942714
400A	NKA1-6 H04-AB3-BC220TF	940296
400A	NKA1-6 H04-AB3-BC220WTF	942720
400A	NKA1-6 H04-H BD-AC220/230/240TF	211216
400A	NKA1-6 H04-H BD-AC220/230/240WTF	211215
400A	NKA1-6 H04-H BD-AC280/400/41.5TF	211216
400A	NKA1-6 H04-H BD-AC280/400/41.5WTF	211217
400A	NKA1-6 H04-H BD-BC110TF	211218
400A	NKA1-6 H04-H BD-BC110WTF	211219
400A	NKA1-6 H04-H BD-BC220TF	211220
400A	NKA1-6 H04-H BD-BC220WTF	211221
400A	NKA1-6 H04-W BD-AC220/230/240TF	940196
400A	NKA1-6 H04-W BD-AC220/230/240WTF	942672
400A	NKA1-6 H04-W BD-AC220/400/41.5TF	940244
400A	NKA1-6 H04-W BD-AC220/400/41.5WTF	942676
400A	NKA1-6 H04-W BD-BC110TF	940292
400A	NKA1-6 H04-W BD-BC110WTF	942718
400A	NKA1-6 H04-W BD-BC220TF	940340
400A	NKA1-6 H04-W BD-BC220WTF	942766
400A	NKA1-6 H04-P BD-AC220/230/240TF	211280
400A	NKA1-6 H04-P BD-AC220/230/240WTF	211280
400A	NKA1-6 H04-P BD-AC280/400/41.5TF	211284
400A	NKA1-6 H04-P BD-AC280/400/41.5WTF	211285
400A	NKA1-6 H04-P BD-BC110TF	211286
400A	NKA1-6 H04-P BD-BC110WTF	211287
400A	NKA1-6 H04-P BD-BC220TF	211288
400A	NKA1-6 H04-P BD-BC220WTF	211289
630A	NKA1-6 H06-AB3-AC220/230/240TF	940200
630A	NKA1-6 H06-AB3-AC220/230/240WTF	942626
630A	NKA1-6 H06-AB3-AC280/400/41.5TF	940248
630A	NKA1-6 H06-AB3-AC280/400/41.5WTF	942674
630A	NKA1-6 H06-AB3-BC110TF	940298
630A	NKA1-6 H06-AB3-BC110WTF	942722
630A	NKA1-6 H06-AB3-BC220TF	940344
630A	NKA1-6 H06-AB3-BC220WTF	942770
630A	NKA1-6 H06-H BD-AC220/230/240TF	211278
630A	NKA1-6 H06-H BD-AC220/230/240WTF	211279

NKA-1600 Withdrawable 3P

Rated Current	Description	Code
200A	NKA16 N08-H BD-AC280/300/415TF	211380
200A	NKA16 N08-H BD-AC280/300/415MTF	211381
200A	NKA16 N08-H BD-DC110TF	211382
200A	NKA16 N08-H BD-DC110MTF	211383
200A	NKA16 N08-H BD-DC220TF	211384
200A	NKA16 N08-H BD-DC220MTF	211385
200A	NKA16 N08-W BD-AC220/230/240TF	940204
200A	NKA16 N08-W BD-AC220/230/240MTF	940205
200A	NKA16 N08-W BD-AC280/300/415TF	940206
200A	NKA16 N08-W BD-AC280/300/415MTF	940207
200A	NKA16 N08-W BD-DC110TF	940208
200A	NKA16 N08-W BD-DC110MTF	940209
200A	NKA16 N08-W BD-DC220TF	940210
200A	NKA16 N08-W BD-DC220MTF	940211
200A	NKA16 N08-PB3-AC220/230/240TF	211346
200A	NKA16 N08-PB3-AC220/230/240MTF	211347
200A	NKA16 N08-PB3-AC280/300/415TF	211348
200A	NKA16 N08-PB3-AC280/300/415MTF	211349
200A	NKA16 N08-PB3-DC110TF	211350
200A	NKA16 N08-PB3-DC110MTF	211351
200A	NKA16 N08-PB3-DC220TF	211352
200A	NKA16 N08-PB3-DC220MTF	211353
300A	NKA16 N08-WB3-AC220/230/240TF	940202
300A	NKA16 N08-WB3-AC220/230/240MTF	940203
300A	NKA16 N08-WB3-AC280/300/415TF	940204
300A	NKA16 N08-WB3-AC280/300/415MTF	940205
300A	NKA16 N08-WB3-DC110TF	940206
300A	NKA16 N08-WB3-DC110MTF	940207
300A	NKA16 N08-WB3-DC220TF	940208
300A	NKA16 N08-WB3-DC220MTF	940209
300A	NKA16 N08-H BD-AC220/230/240TF	211442
300A	NKA16 N08-H BD-AC220/230/240MTF	211443
300A	NKA16 N08-H BD-AC280/300/415TF	211444
300A	NKA16 N08-H BD-AC280/300/415MTF	211445
300A	NKA16 N08-H BD-DC110TF	211446
300A	NKA16 N08-H BD-DC110MTF	211447
300A	NKA16 N08-H BD-DC220TF	211448
300A	NKA16 N08-H BD-DC220MTF	211449
300A	NKA16 N08-W BD-AC220/230/240TF	940212
300A	NKA16 N08-W BD-AC220/230/240MTF	940213
300A	NKA16 N08-W BD-AC280/300/415TF	940214

NKA-1600 Withdrawable 3P

Rated Current	Description	Code
300A	NKA16 N08-WB3-AC280/300/415MTF	940206
300A	NKA16 N08-WB3-DC110TF	940207
300A	NKA16 N08-WB3-DC110MTF	940208
300A	NKA16 N08-WB3-DC220TF	940209
300A	NKA16 N08-WB3-DC220MTF	940210
300A	NKA16 N08-PB3-AC220/230/240TF	211346
300A	NKA16 N08-PB3-AC220/230/240MTF	211347
300A	NKA16 N08-PB3-AC280/300/415TF	211348
300A	NKA16 N08-PB3-AC280/300/415MTF	211349
300A	NKA16 N08-PB3-DC110TF	211350
300A	NKA16 N08-PB3-DC110MTF	211351
300A	NKA16 N08-PB3-DC220TF	211352
300A	NKA16 N08-PB3-DC220MTF	211353
1000A	NKA16 N10-W BD-AC220/230/240TF	940216
1000A	NKA16 N10-W BD-AC220/230/240MTF	940217
1000A	NKA16 N10-W BD-AC280/300/415TF	940218
1000A	NKA16 N10-W BD-AC280/300/415MTF	940219
1000A	NKA16 N10-W BD-DC110TF	940220
1000A	NKA16 N10-W BD-DC110MTF	940221
1000A	NKA16 N10-W BD-DC220TF	940222
1000A	NKA16 N10-W BD-DC220MTF	940223
1000A	NKA16 N10-WB3-AC220/230/240TF	211306
1000A	NKA16 N10-WB3-AC220/230/240MTF	211307
1000A	NKA16 N10-WB3-AC280/300/415TF	211308
1000A	NKA16 N10-WB3-AC280/300/415MTF	211309
1000A	NKA16 N10-WB3-DC110TF	211310
1000A	NKA16 N10-WB3-DC110MTF	211311
1000A	NKA16 N10-WB3-DC220TF	211312
1000A	NKA16 N10-WB3-DC220MTF	211313
1000A	NKA16 N10-WB3-AC220/230/240TF	940224
1000A	NKA16 N10-WB3-AC220/230/240MTF	940225
1000A	NKA16 N10-WB3-AC280/300/415TF	940226
1000A	NKA16 N10-WB3-AC280/300/415MTF	940227
1000A	NKA16 N10-WB3-DC110TF	940228
1000A	NKA16 N10-WB3-DC110MTF	940229
1000A	NKA16 N10-WB3-DC220TF	940230
1000A	NKA16 N10-WB3-DC220MTF	940231
1000A	NKA16 N10-PB3-AC220/230/240TF	211474
1000A	NKA16 N10-PB3-AC220/230/240MTF	211475
1000A	NKA16 N10-PB3-AC280/300/415TF	211476
1000A	NKA16 N10-PB3-AC280/300/415MTF	211477

NKA-1600 Withdrawable 3P

Rated Current	Description	Code
1000A	NKA16 M10-PB3-AC380/400/415A TP	2113477
1000A	NKA16 M10-PB3-DC110 TP	2113478
1000A	NKA16 M10-PB3-DC110A TP	2113479
1000A	NKA16 M10-PB3-DC220 TP	2113480
1000A	NKA16 M10-PB3-DC220A TP	2113481
1250A	NKA16 M12-AB3-AC220/230/240 TP	940224
1250A	NKA16 M12-AB3-AC220/230/240A TP	940225
1250A	NKA16 M12-AB3-AC380/400/415 TP	940272
1250A	NKA16 M12-AB3-AC380/400/415A TP	940298
1250A	NKA16 M12-AB3-DC110 TP	940320
1250A	NKA16 M12-AB3-DC110A TP	940746
1250A	NKA16 M12-AB3-DC220 TP	940368
1250A	NKA16 M12-AB3-DC220A TP	940794
1250A	NKA16 M12-HB3-AC220/230/240 TP	2113480
1250A	NKA16 M12-HB3-AC220/230/240A TP	2113481
1250A	NKA16 M12-HB3-AC380/400/415 TP	2113482
1250A	NKA16 M12-HB3-AC380/400/415A TP	2113483
1250A	NKA16 M12-HB3-DC110 TP	2113484
1250A	NKA16 M12-HB3-DC110A TP	2113485
1250A	NKA16 M12-HB3-DC220 TP	2113486
1250A	NKA16 M12-HB3-DC220A TP	2113487
1250A	NKA16 M12-AB3-AC220/230/240 TP	940228
1250A	NKA16 M12-AB3-AC220/230/240A TP	940654
1250A	NKA16 M12-AB3-AC380/400/415 TP	940276
1250A	NKA16 M12-AB3-AC380/400/415A TP	940702
1250A	NKA16 M12-AB3-DC110 TP	940324
1250A	NKA16 M12-AB3-DC110A TP	940730
1250A	NKA16 M12-AB3-DC220 TP	940372
1250A	NKA16 M12-AB3-DC220A TP	940798
1250A	NKA16 M12-PB3-AC220/230/240 TP	211338
1250A	NKA16 M12-PB3-AC220/230/240A TP	211339
1250A	NKA16 M12-PB3-AC380/400/415 TP	211338
1250A	NKA16 M12-PB3-AC380/400/415A TP	211341
1250A	NKA16 M12-PB3-DC110 TP	211342
1250A	NKA16 M12-PB3-DC110A TP	211343
1250A	NKA16 M12-PB3-DC220 TP	211344
1250A	NKA16 M12-PB3-DC220A TP	211345
1600A	NKA16 M16-AB3-AC220/230/240 TP	940222
1600A	NKA16 M16-AB3-AC220/230/240A TP	940658
1600A	NKA16 M16-AB3-AC380/400/415 TP	940280
1600A	NKA16 M16-AB3-AC380/400/415A TP	940706

NKA-1600 Withdrawable 3P

Rated Current	Description	Code
1600A	NKA16 M16-AB3-DC110 TP	940228
1600A	NKA16 M16-AB3-DC110A TP	940734
1600A	NKA16 M16-AB3-DC220 TP	940276
1600A	NKA16 M16-AB3-DC220A TP	940682
1600A	NKA16 M16-HB3-AC220/230/240 TP	211634
1600A	NKA16 M16-HB3-AC220/230/240A TP	211635
1600A	NKA16 M16-HB3-AC380/400/415 TP	211636
1600A	NKA16 M16-HB3-AC380/400/415A TP	211637
1600A	NKA16 M16-HB3-DC110 TP	211638
1600A	NKA16 M16-HB3-DC110A TP	211639
1600A	NKA16 M16-HB3-DC220 TP	211640
1600A	NKA16 M16-HB3-DC220A TP	211641
1600A	NKA16 M16-AB3-AC220/230/240 TP	940228
1600A	NKA16 M16-AB3-AC220/230/240A TP 1 HTF	096461
1600A	NKA16 M16-AB3-AC220/230/240A TP	940682
1600A	NKA16 M16-AB3-AC380/400/415 TP	940284
1600A	NKA16 M16-AB3-AC380/400/415A TP	940710
1600A	NKA16 M16-AB3-DC110 TP	940232
1600A	NKA16 M16-AB3-DC110A TP	940738
1600A	NKA16 M16-AB3-DC220 TP	940280
1600A	NKA16 M16-AB3-DC220A TP	940686
1600A	NKA16 M16-PB3-AC220/230/240 TP	211602
1600A	NKA16 M16-PB3-AC220/230/240A TP	211603
1600A	NKA16 M16-PB3-AC380/400/415 TP	211604
1600A	NKA16 M16-PB3-AC380/400/415A TP	211605
1600A	NKA16 M16-PB3-DC110 TP	211606
1600A	NKA16 M16-PB3-DC110A TP	211607
1600A	NKA16 M16-PB3-DC220 TP	211608
1600A	NKA16 M16-PB3-DC220A TP	211609
400A	NKA1650-4-AB3-AC220/230/240 TP	108271
400A	NKA1650-4-AB3-AC220/230/240A TP	108282
400A	NKA1650-4-AB3-AC380/400/415 TP	108419
400A	NKA1650-4-AB3-AC380/400/415A TP	108291
400A	NKA1650-4-HB3-AC220/230/240 TP	211682
400A	NKA1650-4-HB3-AC220/230/240A TP	211683
400A	NKA1650-4-HB3-AC380/400/415 TP	211684
400A	NKA1650-4-HB3-AC380/400/415A TP	211685
400A	NKA1650-4-AB3-AC220/230/240 TP	108273
400A	NKA1650-4-AB3-AC220/230/240A TP	108284
400A	NKA1650-4-AB3-AC380/400/415 TP	108422
400A	NKA1650-4-AB3-AC380/400/415A TP	108295

NKA-1600 Withdrawable 3P

Rated Current	Description	Code
400A	NKA16504-FBD-AC220/230/240TF	211666
400A	NKA16504-FBD-AC220/230/240WTF	211667
400A	NKA16504-FBD-AC280/400/415TF	211668
400A	NKA16504-FBD-AC280/400/415WTF	211669
400A	NKA16504-ABD-AC220/230/240TF	108299
400A	NKA16504-ABD-AC220/230/240WTF	192351
400A	NKA16504-ABD-AC280/400/415TF	108300
400A	NKA16504-ABD-AC280/400/415WTF	192399
400A	NKA16504-HBD-AC220/230/240TF	211674
400A	NKA16504-HBD-AC220/230/240WTF	211675
400A	NKA16504-HBD-AC280/400/415TF	211676
400A	NKA16504-HBD-AC280/400/415WTF	211677
400A	NKA16504-ABD-AC220/230/240TF	108283
400A	NKA16504-ABD-AC220/230/240WTF	192353
400A	NKA16504-ABD-AC280/400/415TF	108301
400A	NKA16504-ABD-AC280/400/415WTF	192393
400A	NKA16504-FBD-AC220/230/240TF	211698
400A	NKA16504-FBD-AC220/230/240WTF	211699
400A	NKA16504-FBD-AC280/400/415TF	211700
400A	NKA16504-FBD-AC280/400/415WTF	211701
400A	NKA16504-ABD-AC220/230/240TF	108287
400A	NKA16504-ABD-AC220/230/240WTF	192359
400A	NKA16504-ABD-AC280/400/415TF	108303
400A	NKA16504-ABD-AC280/400/415WTF	192397
400A	NKA16504-HBD-AC220/230/240TF	211744
400A	NKA16504-HBD-AC220/230/240WTF	211745
400A	NKA16504-HBD-AC280/400/415TF	211746
400A	NKA16504-HBD-AC280/400/415WTF	211747
400A	NKA16504-ABD-AC220/230/240TF	108291
400A	NKA16504-ABD-AC220/230/240WTF	192361
400A	NKA16504-ABD-AC280/400/415TF	108309
400A	NKA16504-ABD-AC280/400/415WTF	192311
400A	NKA16504-FBD-AC220/230/240TF	211720
400A	NKA16504-FBD-AC220/230/240WTF	211721
400A	NKA16504-FBD-AC280/400/415TF	211722
400A	NKA16504-FBD-AC280/400/415WTF	211723
1000A	NKA16510-ABD-AC220/230/240TF	108346
1000A	NKA16510-ABD-AC220/230/240WTF	192367
1000A	NKA16510-ABD-AC280/400/415TF	108348
1000A	NKA16510-ABD-AC280/400/415WTF	192313
1000A	NKA16510-HBD-AC220/230/240TF	211748

NKA-1600 Withdrawable 3P

Rated Current	Description	Code
1000A	NKA16510-FBD-AC220/230/240WTF	211779
1000A	NKA16510-FBD-AC280/400/415TF	211780
1000A	NKA16510-FBD-AC280/400/415WTF	211781
1000A	NKA16510-ABD-AC220/230/240TF	108398
1000A	NKA16510-ABD-AC220/230/240WTF	192371
1000A	NKA16510-ABD-AC280/400/415TF	108397
1000A	NKA16510-ABD-AC280/400/415WTF	192319
1000A	NKA16510-FBD-AC220/230/240TF	211782
1000A	NKA16510-FBD-AC220/230/240WTF	211783
1000A	NKA16510-FBD-AC280/400/415TF	211784
1000A	NKA16510-FBD-AC280/400/415WTF	211785
1250A	NKA16512-ABD-AC220/230/240TF	108402
1250A	NKA16512-ABD-AC220/230/240WTF	192373
1250A	NKA16512-ABD-AC280/400/415TF	108401
1250A	NKA16512-ABD-AC280/400/415WTF	192323
1250A	NKA16512-FBD-AC220/230/240TF	211810
1250A	NKA16512-FBD-AC220/230/240WTF	211811
1250A	NKA16512-FBD-AC280/400/415TF	211812
1250A	NKA16512-FBD-AC280/400/415WTF	211813
1250A	NKA16512-ABD-AC220/230/240TF	108404
1250A	NKA16512-ABD-AC220/230/240WTF	192379
1250A	NKA16512-ABD-AC280/400/415TF	108405
1250A	NKA16512-ABD-AC280/400/415WTF	192327
1250A	NKA16512-FBD-AC220/230/240TF	211794
1250A	NKA16512-FBD-AC220/230/240WTF	211795
1250A	NKA16512-FBD-AC280/400/415TF	211796
1250A	NKA16512-FBD-AC280/400/415WTF	211797
1600A	NKA16516-ABD-AC220/230/240TF	108403
1600A	NKA16516-ABD-AC220/230/240WTF	192383
1600A	NKA16516-ABD-AC280/400/415TF	108409
1600A	NKA16516-ABD-AC280/400/415WTF	192321
1600A	NKA16516-FBD-AC220/230/240TF	211840
1600A	NKA16516-FBD-AC220/230/240WTF	211841
1600A	NKA16516-FBD-AC280/400/415TF	211844
1600A	NKA16516-FBD-AC280/400/415WTF	211845
1600A	NKA16516-ABD-AC220/230/240TF	108413
1600A	NKA16516-ABD-AC220/230/240WTF	192387
1600A	NKA16516-ABD-AC280/400/415TF	108407
1600A	NKA16516-ABD-AC280/400/415WTF	192325
1600A	NKA16516-FBD-AC220/230/240TF	211846
1600A	NKA16516-FBD-AC220/230/240WTF	211847
1600A	NKA16516-FBD-AC280/400/415WTF	211829

NKA-1600 With drawble 4P

Rated Current	Description	Code
400A	NKA16 H04-A B4-AC220/230/240T	940003
400A	NKA16 H04-A B4-AC220/230/240MT	942428
400A	NKA16 H04-A B4-AC220/400/415T	940030
400A	NKA16 H04-A B4-AC220/400/415MT	942476
400A	NKA16 H04-A B4-DC110T	940098
400A	NKA16 H04-A B4-DC110MT	942524
400A	NKA16 H04-A B4-DC220T	940136
400A	NKA16 H04-A B4-DC220MT	942572
400A	NKA16 H04-H B4-AC220/230/240T	210918
400A	NKA16 H04-H B4-AC220/230/240MT	210919
400A	NKA16 H04-H B4-AC220/400/415T	210920
400A	NKA16 H04-H B4-AC220/400/415MT	210921
400A	NKA16 H04-H B4-DC110T	210922
400A	NKA16 H04-H B4-DC110MT	210923
400A	NKA16 H04-H B4-DC220T	210924
400A	NKA16 H04-H B4-DC220MT	210925
400A	NKA16 H04-W B4-AC220/230/240T	940006
400A	NKA16 H04-W B4-AC220/230/240MT	942429
400A	NKA16 H04-W B4-AC220/400/415T	940034
400A	NKA16 H04-W B4-AC220/400/415MT	942480
400A	NKA16 H04-W B4-DC110T	940102
400A	NKA16 H04-W B4-DC110MT	942526
400A	NKA16 H04-W B4-DC220T	940138
400A	NKA16 H04-W B4-DC220MT	942573
400A	NKA16 H04-F B4-AC220/230/240T	210084
400A	NKA16 H04-F B4-AC220/230/240MT	210087
400A	NKA16 H04-F B4-AC220/400/415T	210088
400A	NKA16 H04-F B4-AC220/400/415MT	210089
400A	NKA16 H04-F B4-DC110T	210090
400A	NKA16 H04-F B4-DC110MT	210091
400A	NKA16 H04-F B4-DC220T	210092
400A	NKA16 H04-F B4-DC220MT	210093
220A	NKA16 H06-A B4-AC220/230/240T	940010
220A	NKA16 H06-A B4-AC220/230/240MT	942436
220A	NKA16 H06-A B4-AC220/400/415T	940038
220A	NKA16 H06-A B4-AC220/400/415MT	942484
220A	NKA16 H06-A B4-DC110T	940106
220A	NKA16 H06-A B4-DC110MT	942528
220A	NKA16 H06-A B4-DC220T	940134

NKA-1600 With drawble 4P

Rated Current	Description	Code
220A	NKA16 H06-A B4-DC220MT	942580
220A	NKA16 H06-H B4-AC220/230/240T	210982
220A	NKA16 H06-H B4-AC220/230/240MT	210983
220A	NKA16 H06-H B4-AC220/400/415T	210984
220A	NKA16 H06-H B4-AC220/400/415MT	210985
220A	NKA16 H06-H B4-DC110T	210986
220A	NKA16 H06-H B4-DC110MT	210987
220A	NKA16 H06-H B4-DC220T	210988
220A	NKA16 H06-H B4-DC220MT	210989
220A	NKA16 H06-W B4-AC220/230/240T	940014
220A	NKA16 H06-W B4-AC220/230/240MT	942440
220A	NKA16 H06-W B4-AC220/400/415T	940020
220A	NKA16 H06-W B4-AC220/400/415MT	942486
220A	NKA16 H06-W B4-DC110T	940110
220A	NKA16 H06-W B4-DC110MT	942526
220A	NKA16 H06-W B4-DC220T	940136
220A	NKA16 H06-W B4-DC220MT	942584
220A	NKA16 H06-F B4-AC220/230/240T	210090
220A	NKA16 H06-F B4-AC220/230/240MT	210091
220A	NKA16 H06-F B4-AC220/400/415T	210092
220A	NKA16 H06-F B4-AC220/400/415MT	210093
220A	NKA16 H06-F B4-DC110T	210094
220A	NKA16 H06-F B4-DC110MT	210095
220A	NKA16 H06-F B4-DC220T	210096
220A	NKA16 H06-F B4-DC220MT	210097
300A	NKA16 H08-A B4-AC220/230/240T	940018
300A	NKA16 H08-A B4-AC220/230/240MT	942444
300A	NKA16 H08-A B4-AC220/400/415T	940026
300A	NKA16 H08-A B4-AC220/400/415MT	942492
300A	NKA16 H08-A B4-DC110T	940118
300A	NKA16 H08-A B4-DC110MT	942540
300A	NKA16 H08-A B4-DC220T	940142
300A	NKA16 H08-A B4-DC220MT	942588
300A	NKA16 H08-H B4-AC220/230/240T	211066
300A	NKA16 H08-H B4-AC220/230/240MT	211067
300A	NKA16 H08-H B4-AC220/400/415T	211068
300A	NKA16 H08-H B4-AC220/400/415MT	211069
300A	NKA16 H08-H B4-DC110T	211070
300A	NKA16 H08-H B4-DC110MT	211071
300A	NKA16 H08-H B4-DC220T	211072
300A	NKA16 H08-H B4-DC220MT	211073

NKA-1600 Withdrawable 4P

Rated Current	Description	Code
300A	NKA16H03-WB3-AC220/230/240TF	940022
300A	NKA16H03-WB3-AC220/230/240ATF	942448
300A	NKA16H03-WB3-AC230/400/415TF	940040
300A	NKA16H03-WB3-AC230/400/415ATF	942495
300A	NKA16H03-WB3-BC110TF	940118
300A	NKA16H03-WB3-BC110ATF	942544
300A	NKA16H03-WB3-BC220TF	940146
300A	NKA16H03-WB3-BC220ATF	942592
300A	NKA16H03-FB3-AC220/230/240TF	211034
300A	NKA16H03-FB3-AC220/230/240ATF	211035
300A	NKA16H03-FB3-AC230/400/415TF	211036
300A	NKA16H03-FB3-AC230/400/415ATF	211037
300A	NKA16H03-FB3-BC110TF	211038
300A	NKA16H03-FB3-BC110ATF	211039
300A	NKA16H03-FB3-BC220TF	211040
300A	NKA16H03-FB3-BC220ATF	211041
1000A	NKA16H10-AB3-AC220/230/240TF	940026
1000A	NKA16H10-AB3-AC220/230/240ATF	942452
1000A	NKA16H10-AB3-AC230/400/415TF	940046
1000A	NKA16H10-AB3-AC230/400/415ATF	942500
1000A	NKA16H10-AB3-BC110TF	940122
1000A	NKA16H10-AB3-BC110ATF	942548
1000A	NKA16H10-AB3-BC220TF	940140
1000A	NKA16H10-AB3-BC220ATF	942596
1000A	NKA16H10-HB3-AC220/230/240TF	211120
1000A	NKA16H10-HB3-AC220/230/240ATF	211121
1000A	NKA16H10-HB3-AC230/400/415TF	211122
1000A	NKA16H10-HB3-AC230/400/415ATF	211123
1000A	NKA16H10-HB3-BC110TF	211124
1000A	NKA16H10-HB3-BC110ATF	211125
1000A	NKA16H10-HB3-BC220TF	211126
1000A	NKA16H10-HB3-BC220ATF	211127
1000A	NKA16H10-WB3-AC220/230/240TF	940030
1000A	NKA16H10-WB3-AC220/230/240ATF	942456
1000A	NKA16H10-WB3-AC230/400/415TF	940048
1000A	NKA16H10-WB3-AC230/400/415ATF	942504
1000A	NKA16H10-WB3-BC110TF	940126
1000A	NKA16H10-WB3-BC110ATF	942552
1000A	NKA16H10-WB3-BC220TF	940144
1000A	NKA16H10-WB3-BC220ATF	942600
1000A	NKA16H10-FB3-AC220/230/240TF	211098

NKA-1600 Withdrawable 4P

Rated Current	Description	Code
1000A	NKA16H10-FB3-AC220/230/240ATF	211109
1000A	NKA16H10-FB3-AC230/400/415TF	211100
1000A	NKA16H10-FB3-AC230/400/415ATF	211101
1000A	NKA16H10-FB3-BC110TF	211102
1000A	NKA16H10-FB3-BC110ATF	211103
1000A	NKA16H10-FB3-BC220TF	211104
1000A	NKA16H10-FB3-BC220ATF	211105
1250A	NKA16H12-AB3-AC220/230/240TF	940034
1250A	NKA16H12-AB3-AC220/230/240ATF	942460
1250A	NKA16H12-AB3-AC230/400/415TF	940042
1250A	NKA16H12-AB3-AC230/400/415ATF	942508
1250A	NKA16H12-AB3-BC110TF	940130
1250A	NKA16H12-AB3-BC110ATF	942556
1250A	NKA16H12-AB3-BC220TF	940138
1250A	NKA16H12-AB3-BC220ATF	942604
1250A	NKA16H12-HB3-AC220/230/240TF	211194
1250A	NKA16H12-HB3-AC220/230/240ATF	211195
1250A	NKA16H12-HB3-AC230/400/415TF	211196
1250A	NKA16H12-HB3-AC230/400/415ATF	211197
1250A	NKA16H12-HB3-BC110TF	211198
1250A	NKA16H12-HB3-BC110ATF	211199
1250A	NKA16H12-HB3-BC220TF	211200
1250A	NKA16H12-HB3-BC220ATF	211201
1250A	NKA16H12-WB3-AC220/230/240TF	940038
1250A	NKA16H12-WB3-AC220/230/240ATF	942464
1250A	NKA16H12-WB3-AC230/400/415TF	940046
1250A	NKA16H12-WB3-AC230/400/415ATF	942512
1250A	NKA16H12-WB3-BC110TF	940134
1250A	NKA16H12-WB3-BC110ATF	942560
1250A	NKA16H12-WB3-BC220TF	940142
1250A	NKA16H12-WB3-BC220ATF	942608
1250A	NKA16H12-FB3-AC220/230/240TF	211182
1250A	NKA16H12-FB3-AC220/230/240ATF	211183
1250A	NKA16H12-FB3-AC230/400/415TF	211184
1250A	NKA16H12-FB3-AC230/400/415ATF	211185
1250A	NKA16H12-FB3-BC110TF	211186
1250A	NKA16H12-FB3-BC110ATF	211187
1250A	NKA16H12-FB3-BC220TF	211188
1250A	NKA16H12-FB3-BC220ATF	211189
1600A	NKA16H16-AB3-AC220/230/240TF	940042
1600A	NKA16H16-AB3-AC220/230/240ATF	942468

NKA-1600 Withdrawable 4P

Rated Current	Description	Code
1600A	NKA16H1S-AB3-AC230/400/41.5TF	940090
1600A	NKA16H1S-AB4-AC230/400/41.5MTF	942314
1600A	NKA16H1S-AB3-BC110TF	940128
1600A	NKA16H1S-AB4-BC110MTF	942364
1600A	NKA16H1S-AB3-BC220TF	940186
1600A	NKA16H1S-AB4-BC220MTF	942412
1600A	NKA16H1S-HB4-AC220/230/240TF	211248
1600A	NKA16H1S-HB4-AC220/230/240MTF	211249
1600A	NKA16H1S-HB3-AC230/400/41.5TF	211280
1600A	NKA16H1S-HB4-AC230/400/41.5MTF	211281
1600A	NKA16H1S-HB4-BC110TF	211282
1600A	NKA16H1S-HB4-BC110MTF	211283
1600A	NKA16H1S-HB4-BC220TF	211284
1600A	NKA16H1S-HB4-BC220MTF	211285
1600A	NKA16H1S-AB4-AC220/230/240TF	940048
1600A	NKA16H1S-AB4-AC220/230/240MTF	942472
1600A	NKA16H1S-AB3-AC230/400/41.5TF	940094
1600A	NKA16H1S-AB4-AC230/400/41.5MTF	942320
1600A	NKA16H1S-AB3-BC110TF	940142
1600A	NKA16H1S-AB4-BC110MTF	942368
1600A	NKA16H1S-AB3-BC220TF	940190
1600A	NKA16H1S-AB4-BC220MTF	942416
1600A	NKA16H1S-FB4-AC220/230/240TF	211226
1600A	NKA16H1S-FB4-AC220/230/240MTF	211227
1600A	NKA16H1S-FB4-AC230/400/41.5TF	211228
1600A	NKA16H1S-FB4-AC230/400/41.5MTF	211229
1600A	NKA16H1S-FB4-BC110TF	211230
1600A	NKA16H1S-FB4-BC110MTF	211231
1600A	NKA16H1S-FB4-BC220TF	211232
1600A	NKA16H1S-FB4-BC220MTF	211233
400A	NKA16M04-AB4-AC220/230/240TF	940194
400A	NKA16M04-AB4-AC220/230/240MTF	942320
400A	NKA16M04-AB4-AC230/400/41.5TF	940242
400A	NKA16M04-AB4-AC230/400/41.5MTF	942368
400A	NKA16M04-AB4-BC110TF	940290
400A	NKA16M04-AB4-BC110MTF	942414
400A	NKA16M04-AB4-BC220TF	940298
400A	NKA16M04-AB4-BC220MTF	942434
400A	NKA16M04-HB4-AC220/230/240TF	211232
400A	NKA16M04-HB4-AC220/230/240MTF	211233
400A	NKA16M04-HB4-AC230/400/41.5TF	211234

NKA-1600 Withdrawable 4P

Rated Current	Description	Code
400A	NKA16M04-HB4-AC230/400/41.5MTF	211235
400A	NKA16M04-HB4-BC110TF	211236
400A	NKA16M04-HB4-BC110MTF	211237
400A	NKA16M04-HB4-BC220TF	211238
400A	NKA16M04-HB4-BC220MTF	211239
400A	NKA16M04-AB4-AC220/230/240TF	940196
400A	NKA16M04-AB4-AC220/230/240MTF	942322
400A	NKA16M04-AB4-AC230/400/41.5TF	940244
400A	NKA16M04-AB4-AC230/400/41.5MTF	942372
400A	NKA16M04-AB4-BC110TF	940294
400A	NKA16M04-AB4-BC110MTF	942420
400A	NKA16M04-AB4-BC220TF	940342
400A	NKA16M04-AB4-BC220MTF	942428
400A	NKA16M04-FB4-AC220/230/240TF	211290
400A	NKA16M04-FB4-AC220/230/240MTF	211291
400A	NKA16M04-FB4-AC230/400/41.5TF	211292
400A	NKA16M04-FB4-AC230/400/41.5MTF	211293
400A	NKA16M04-FB4-BC110TF	211294
400A	NKA16M04-FB4-BC110MTF	211295
400A	NKA16M04-FB4-BC220TF	211296
400A	NKA16M04-FB4-BC220MTF	211297
400A	NKA16M04-AB4-AC230/230/240TF	940202
400A	NKA16M04-AB4-AC230/230/240MTF	942428
400A	NKA16M04-AB4-AC230/400/41.5TF	940240
400A	NKA16M04-AB4-AC230/400/41.5MTF	942436
400A	NKA16M04-AB4-BC110TF	940298
400A	NKA16M04-AB4-BC110MTF	942424
400A	NKA16M04-AB4-BC220TF	940346
400A	NKA16M04-AB4-BC220MTF	942432
400A	NKA16M04-HB4-AC220/230/240TF	211238
400A	NKA16M04-HB4-AC220/230/240MTF	211239
400A	NKA16M04-HB4-AC230/400/41.5TF	211238
400A	NKA16M04-HB4-AC230/400/41.5MTF	211239
400A	NKA16M04-HB4-BC110TF	211290
400A	NKA16M04-HB4-BC110MTF	211291
400A	NKA16M04-HB4-BC220TF	211292
400A	NKA16M04-HB4-BC220MTF	211293
400A	NKA16M04-AB4-AC220/230/240TF	940208
400A	NKA16M04-AB4-AC220/230/240MTF	942432
400A	NKA16M04-AB4-AC230/400/41.5TF	940244
400A	NKA16M04-AB4-AC230/400/41.5MTF	942438

NKA-1600 Withdrawable 4P

Rated Current	Description	Code
200A	NKA16N03-WB3-BC110TF	940203
200A	NKA16N03-WB3-BC110WTF	942728
200A	NKA16N03-WB3-BC220TF	940250
200A	NKA16N03-WB3-BC220WTF	942778
200A	NKA16N03-PB3-AC220/230/240TF	211254
200A	NKA16N03-PB3-AC220/230/240WTF	211255
200A	NKA16N03-PB3-AC280/300/315TF	211256
200A	NKA16N03-PB3-AC280/300/315WTF	211257
200A	NKA16N03-PB3-BC110TF	211258
200A	NKA16N03-PB3-BC110WTF	211259
200A	NKA16N03-PB3-BC220TF	211260
200A	NKA16N03-PB3-BC220WTF	211261
300A	NKA16N03-AB3-AC220/230/240TF	940210
300A	NKA16N03-AB3-AC220/230/240WTF	942806
300A	NKA16N03-AB3-AC280/300/315TF	940258
300A	NKA16N03-AB3-AC280/300/315WTF	942807
300A	NKA16N03-AB3-BC110TF	940266
300A	NKA16N03-AB3-BC110WTF	942737
300A	NKA16N03-AB3-BC220TF	940267
300A	NKA16N03-AB3-BC220WTF	942780
300A	NKA16N03-HB3-AC220/230/240TF	211450
300A	NKA16N03-HB3-AC220/230/240WTF	211451
300A	NKA16N03-HB3-AC280/300/315TF	211452
300A	NKA16N03-HB3-AC280/300/315WTF	211453
300A	NKA16N03-HB3-BC110TF	211454
300A	NKA16N03-HB3-BC110WTF	211455
300A	NKA16N03-HB3-BC220TF	211456
300A	NKA16N03-HB3-BC220WTF	211457
300A	NKA16N03-WB3-AC220/230/240TF	940216
300A	NKA16N03-WB3-AC220/230/240WTF	942640
300A	NKA16N03-WB3-AC280/300/315TF	940262
300A	NKA16N03-WB3-AC280/300/315WTF	942683
300A	NKA16N03-WB3-BC110TF	940218
300A	NKA16N03-WB3-BC110WTF	942738
300A	NKA16N03-WB3-BC220TF	940259
300A	NKA16N03-WB3-BC220WTF	942739
300A	NKA16N03-PB3-AC220/230/240TF	211418
300A	NKA16N03-PB3-AC220/230/240WTF	211419
300A	NKA16N03-PB3-AC280/300/315TF	211420
300A	NKA16N03-PB3-AC280/300/315WTF	211421
300A	NKA16N03-PB3-BC110TF	211422

NKA-1600 Withdrawable 4P

Rated Current	Description	Code
300A	NKA16N03-PB3-BC110WTF	211423
300A	NKA16N03-PB3-BC220TF	211424
300A	NKA16N03-PB3-BC220WTF	211425
1000A	NKA16N10-AB3-AC220/230/240TF	940212
1000A	NKA16N10-AB3-AC220/230/240WTF	942642
1000A	NKA16N10-AB3-AC280/300/315TF	940264
1000A	NKA16N10-AB3-AC280/300/315WTF	942693
1000A	NKA16N10-AB3-BC110TF	940214
1000A	NKA16N10-AB3-BC110WTF	942740
1000A	NKA16N10-AB3-BC220TF	940263
1000A	NKA16N10-AB3-BC220WTF	942736
1000A	NKA16N10-HB3-AC220/230/240TF	211514
1000A	NKA16N10-HB3-AC220/230/240WTF	211515
1000A	NKA16N10-HB3-AC280/300/315TF	211516
1000A	NKA16N10-HB3-AC280/300/315WTF	211517
1000A	NKA16N10-HB3-BC110TF	211518
1000A	NKA16N10-HB3-BC110WTF	211519
1000A	NKA16N10-HB3-BC220TF	211520
1000A	NKA16N10-HB3-BC220WTF	211521
1000A	NKA16N10-WB3-AC220/230/240TF	940222
1000A	NKA16N10-WB3-AC220/230/240WTF	942643
1000A	NKA16N10-WB3-AC280/300/315TF	940270
1000A	NKA16N10-WB3-AC280/300/315WTF	942695
1000A	NKA16N10-WB3-BC110TF	940213
1000A	NKA16N10-WB3-BC110WTF	942741
1000A	NKA16N10-WB3-BC220TF	940265
1000A	NKA16N10-WB3-BC220WTF	942792
1000A	NKA16N10-PB3-AC220/230/240TF	211482
1000A	NKA16N10-PB3-AC220/230/240WTF	211483
1000A	NKA16N10-PB3-AC280/300/315TF	211484
1000A	NKA16N10-PB3-AC280/300/315WTF	211485
1000A	NKA16N10-PB3-BC110TF	211486
1000A	NKA16N10-PB3-BC110WTF	211487
1000A	NKA16N10-PB3-BC220TF	211488
1000A	NKA16N10-PB3-BC220WTF	211489
1250A	NKA16N12-AB3-AC220/230/240TF	940226
1250A	NKA16N12-AB3-AC220/230/240WTF	942652
1250A	NKA16N12-AB3-AC280/300/315TF	940274
1250A	NKA16N12-AB3-AC280/300/315WTF	942700
1250A	NKA16N12-AB3-BC110TF	940227
1250A	NKA16N12-AB3-BC110WTF	942742

NKA-1600 Withdrawable 4P

Rated Current	Description	Code
1250A	NKA16N12-A-B4-BC220TF	940270
1250A	NKA16N12-A-B4-BC220WTF	942794
1250A	NKA16N12-H-B4-AC220/230/240TF	211378
1250A	NKA16N12-H-B4-AC220/230/240WTF	211379
1250A	NKA16N12-H-B4-AC220/400/415TF	211380
1250A	NKA16N12-H-B4-AC220/400/415WTF	211381
1250A	NKA16N12-H-B4-BC110TF	211382
1250A	NKA16N12-H-B4-BC110WTF	211383
1250A	NKA16N12-H-B4-BC220TF	211384
1250A	NKA16N12-H-B4-BC220WTF	211385
1250A	NKA16N12-WB4-AC220/230/240TF	940220
1250A	NKA16N12-WB4-AC220/230/240WTF	942856
1250A	NKA16N12-WB4-AC220/400/415TF	940278
1250A	NKA16N12-WB4-AC220/400/415WTF	942708
1250A	NKA16N12-WB4-BC110TF	940226
1250A	NKA16N12-WB4-BC110WTF	942732
1250A	NKA16N12-WB4-BC220TF	940274
1250A	NKA16N12-WB4-BC220WTF	942800
1250A	NKA16N12-FB4-AC220/230/240TF	211348
1250A	NKA16N12-FB4-AC220/230/240WTF	211347
1250A	NKA16N12-FB4-AC220/400/415TF	211348
1250A	NKA16N12-FB4-AC220/400/415WTF	211349
1250A	NKA16N12-FB4-BC110TF	211350
1250A	NKA16N12-FB4-BC110WTF	211351
1250A	NKA16N12-FB4-BC220TF	211352
1250A	NKA16N12-FB4-BC220WTF	211353
1600A	NKA16N13-A-B4-AC220/230/240TF	940224
1600A	NKA16N13-A-B4-AC220/230/240WTF	942860
1600A	NKA16N13-A-B4-AC220/400/415TF	940287
1600A	NKA16N13-A-B4-AC220/400/415WTF	942708
1600A	NKA16N13-A-B4-BC110TF	940220
1600A	NKA16N13-A-B4-BC110WTF	942754
1600A	NKA16N13-A-B4-BC220TF	940278
1600A	NKA16N13-A-B4-BC220WTF	942804
1600A	NKA16N13-H-B4-AC220/230/240TF	211347
1600A	NKA16N13-H-B4-AC220/230/240WTF	211345
1600A	NKA16N13-H-B4-AC220/400/415TF	211348
1600A	NKA16N13-H-B4-AC220/400/415WTF	211349
1600A	NKA16N13-H-B4-BC110TF	211346
1600A	NKA16N13-H-B4-BC110WTF	211347
1600A	NKA16N13-H-B4-BC220TF	211348
1600A	NKA16N13-H-B4-BC220WTF	211349
1600A	NKA16N13-FB4-AC220/230/240TF	211348
1600A	NKA16N13-FB4-AC220/230/240WTF	211347
1600A	NKA16N13-FB4-AC220/400/415TF	211348
1600A	NKA16N13-FB4-AC220/400/415WTF	211349
1600A	NKA16N13-FB4-BC110TF	211346
1600A	NKA16N13-FB4-BC110WTF	211347
1600A	NKA16N13-FB4-BC220TF	211348

NKA-1600 Withdrawable 4P

Rated Current	Description	Code
1600A	NKA16N13-H-B4-BC220WTF	211349
1600A	NKA16N13-WB4-AC220/230/240TF	940228
1600A	NKA16N13-WB4-AC220/230/240WTF	942864
1600A	NKA16N13-WB4-AC220/400/415TF	940288
1600A	NKA16N13-WB4-AC220/400/415WTF	942712
1600A	NKA16N13-WB4-BC110TF	940224
1600A	NKA16N13-WB4-BC110WTF	942760
1600A	NKA16N13-WB4-BC220TF	940232
1600A	NKA16N13-WB4-BC220WTF	942808
1600A	NKA16N13-FB4-AC220/230/240TF	211310
1600A	NKA16N13-FB4-AC220/230/240WTF	211311
1600A	NKA16N13-FB4-AC220/400/415TF	211312
1600A	NKA16N13-FB4-AC220/400/415WTF	211313
1600A	NKA16N13-FB4-BC110TF	211314
1600A	NKA16N13-FB4-BC110WTF	211315
1600A	NKA16N13-FB4-BC220TF	211316
1600A	NKA16N13-FB4-BC220WTF	211317
400A	NKA16S04-A-B4-AC220/230/240TF	108270
400A	NKA16S04-A-B4-AC220/230/240WTF	192343
400A	NKA16S04-A-B4-AC220/400/415TF	108221
400A	NKA16S04-A-B4-AC220/400/415WTF	192393
400A	NKA16S04-H-B4-AC220/230/240TF	211336
400A	NKA16S04-H-B4-AC220/230/240WTF	211337
400A	NKA16S04-H-B4-AC220/400/415TF	211338
400A	NKA16S04-H-B4-AC220/400/415WTF	211339
400A	NKA16S04-W-B4-AC220/230/240TF	108277
400A	NKA16S04-W-B4-AC220/230/240WTF	192349
400A	NKA16S04-W-B4-AC220/400/415TF	108225
400A	NKA16S04-W-B4-AC220/400/415WTF	192397
400A	NKA16S04-F-B4-AC220/230/240TF	211370
400A	NKA16S04-F-B4-AC220/230/240WTF	211371
400A	NKA16S04-F-B4-AC220/400/415TF	211372
400A	NKA16S04-F-B4-AC220/400/415WTF	211373
400A	NKA16S05-A-B4-AC220/230/240TF	108281
400A	NKA16S05-A-B4-AC220/230/240WTF	192353
400A	NKA16S05-A-B4-AC220/400/415TF	108229
400A	NKA16S05-A-B4-AC220/400/415WTF	192301
400A	NKA16S05-H-B4-AC220/230/240TF	211378
400A	NKA16S05-H-B4-AC220/230/240WTF	211379
400A	NKA16S05-H-B4-AC220/400/415TF	211380
400A	NKA16S05-H-B4-AC220/400/415WTF	211381

NKA-1600 Withdrawable 4P

Rated Current	Description	Code
200A	NKA16503-AB4-AC220/230/240TF	108393
200A	NKA16503-AB4-AC220/230/240WTF	192397
200A	NKA16503-AB4-AC230/400/415TF	108433
200A	NKA16503-AB4-AC230/400/415WTF	192303
200A	NKA16503-FB4-AC220/230/240TF	211702
200A	NKA16503-FB4-AC220/230/240WTF	211703
200A	NKA16503-FB4-AC230/400/415TF	211704
200A	NKA16503-FB4-AC230/400/415WTF	211705
300A	NKA16503-AB4-AC220/230/240TF	108389
300A	NKA16503-AB4-AC220/230/240WTF	192381
300A	NKA16503-AB4-AC230/400/415TF	108437
300A	NKA16503-AB4-AC230/400/415WTF	192309
300A	NKA16503-HB4-AC220/230/240TF	211730
300A	NKA16503-HB4-AC220/230/240WTF	211731
300A	NKA16503-HB4-AC230/400/415TF	211732
300A	NKA16503-HB4-AC230/400/415WTF	211733
300A	NKA16503-AB4-AC220/230/240TF	108393
300A	NKA16503-AB4-AC220/230/240WTF	192383
300A	NKA16503-AB4-AC230/400/415TF	108441
300A	NKA16503-AB4-AC230/400/415WTF	192313
300A	NKA16503-FB4-AC220/230/240TF	211734
300A	NKA16503-FB4-AC220/230/240WTF	211735
300A	NKA16503-FB4-AC230/400/415TF	211736
300A	NKA16503-FB4-AC230/400/415WTF	211737
1000A	NKA16510-AB4-AC220/230/240TF	108397
1000A	NKA16510-AB4-AC220/230/240WTF	192389
1000A	NKA16510-AB4-AC230/400/415TF	108445
1000A	NKA16510-AB4-AC230/400/415WTF	192317
1000A	NKA16510-HB4-AC220/230/240TF	211782
1000A	NKA16510-HB4-AC220/230/240WTF	211783
1000A	NKA16510-HB4-AC230/400/415TF	211784
1000A	NKA16510-HB4-AC230/400/415WTF	211785
1000A	NKA16510-AB4-AC220/230/240TF	108401
1000A	NKA16510-AB4-AC220/230/240WTF	192373
1000A	NKA16510-AB4-AC230/400/415TF	108449
1000A	NKA16510-AB4-AC230/400/415WTF	192321
1000A	NKA16510-FB4-AC220/230/240TF	211786
1000A	NKA16510-FB4-AC220/230/240WTF	211787
1000A	NKA16510-FB4-AC230/400/415TF	211788
1000A	NKA16510-FB4-AC230/400/415WTF	211789
1250A	NKA16513-AB4-AC220/230/240TF	108403

NKA-1600 Withdrawable 4P

Rated Current	Description	Code
200A	NKA16503-AB4-AC220/230/240TF	108393
200A	NKA16503-AB4-AC220/230/240WTF	192397
200A	NKA16503-AB4-AC230/400/415TF	108433
200A	NKA16503-AB4-AC230/400/415WTF	192303
200A	NKA16503-FB4-AC220/230/240TF	211702
200A	NKA16503-FB4-AC220/230/240WTF	211703
200A	NKA16503-FB4-AC230/400/415TF	211704
200A	NKA16503-FB4-AC230/400/415WTF	211705
300A	NKA16503-AB4-AC220/230/240TF	108389
300A	NKA16503-AB4-AC220/230/240WTF	192381
300A	NKA16503-AB4-AC230/400/415TF	108437
300A	NKA16503-AB4-AC230/400/415WTF	192309
300A	NKA16503-HB4-AC220/230/240TF	211730
300A	NKA16503-HB4-AC220/230/240WTF	211731
300A	NKA16503-HB4-AC230/400/415TF	211732
300A	NKA16503-HB4-AC230/400/415WTF	211733
300A	NKA16503-AB4-AC220/230/240TF	108393
300A	NKA16503-AB4-AC220/230/240WTF	192383
300A	NKA16503-AB4-AC230/400/415TF	108441
300A	NKA16503-AB4-AC230/400/415WTF	192313
300A	NKA16503-FB4-AC220/230/240TF	211734
300A	NKA16503-FB4-AC220/230/240WTF	211735
300A	NKA16503-FB4-AC230/400/415TF	211736
300A	NKA16503-FB4-AC230/400/415WTF	211737
1000A	NKA16510-AB4-AC220/230/240TF	108397
1000A	NKA16510-AB4-AC220/230/240WTF	192389
1000A	NKA16510-AB4-AC230/400/415TF	108445
1000A	NKA16510-AB4-AC230/400/415WTF	192317
1000A	NKA16510-HB4-AC220/230/240TF	211782
1000A	NKA16510-HB4-AC220/230/240WTF	211783
1000A	NKA16510-HB4-AC230/400/415TF	211784
1000A	NKA16510-HB4-AC230/400/415WTF	211785
1000A	NKA16510-AB4-AC220/230/240TF	108401
1000A	NKA16510-AB4-AC220/230/240WTF	192373
1000A	NKA16510-AB4-AC230/400/415TF	108449
1000A	NKA16510-AB4-AC230/400/415WTF	192321
1000A	NKA16510-FB4-AC220/230/240TF	211786
1000A	NKA16510-FB4-AC220/230/240WTF	211787
1000A	NKA16510-FB4-AC230/400/415TF	211788
1000A	NKA16510-FB4-AC230/400/415WTF	211789
1250A	NKA16513-AB4-AC220/230/240TF	108403

NKA-1600 Withdrawable 4P

Rated Current	Description	Code
1250A	NKA16S12-AB4-AC220/230/240MTF	192277
1250A	NKA16S12-AB4-AC230/240/240TF	108552
1250A	NKA16S12-AB4-AC230/240/240MTF	192225
1250A	NKA16S12-HB4-AC220/230/240TF	211818
1250A	NKA16S12-HB4-AC220/230/240MTF	211819
1250A	NKA16S12-HB4-AC230/240/240TF	211818
1250A	NKA16S12-HB4-AC230/240/240MTF	211817
1250A	NKA16S12-AB4-AC220/230/240TF	108509
1250A	NKA16S12-AB4-AC220/230/240MTF	192281
1250A	NKA16S12-AB4-AC230/240/240TF	108557
1250A	NKA16S12-AB4-AC230/240/240MTF	192229
1250A	NKA16S12-PB4-AC220/230/240TF	211798
1250A	NKA16S12-PB4-AC220/230/240MTF	211799
1250A	NKA16S12-PB4-AC230/240/240TF	211800
1250A	NKA16S12-PB4-AC230/240/240MTF	211801
1600A	NKA16S16-AB4-AC220/230/240TF	108513
1600A	NKA16S16-AB4-AC220/230/240MTF	192283
1600A	NKA16S16-AB4-AC230/240/240TF	108561
1600A	NKA16S16-AB4-AC230/240/240MTF	192223
1600A	NKA16S16-HB4-AC220/230/240TF	211848
1600A	NKA16S16-HB4-AC220/230/240MTF	211847
1600A	NKA16S16-HB4-AC230/240/240TF	211848
1600A	NKA16S16-HB4-AC230/240/240MTF	211849
1600A	NKA16S16-AB4-AC220/230/240TF	108517
1600A	NKA16S16-AB4-AC220/230/240MTF	192289
1600A	NKA16S16-AB4-AC230/240/240TF	108565
1600A	NKA16S16-AB4-AC230/240/240MTF	192227
1600A	NKA16S16-PB4-AC220/230/240TF	211820
1600A	NKA16S16-PB4-AC220/230/240MTF	211821
1600A	NKA16S16-PB4-AC230/240/240TF	211822
1600A	NKA16S16-PB4-AC230/240/240MTF	211823

NKA-2000 Fixed 3P

Rated Current	Description	Code
200A	NKA20HD6-AP3-AC220/230/240TF	950537
200A	NKA20HD6-AP3-AC220/230/240-3P11MTF	218150
200A	NKA20HD6-AP3-AC220/230/240MTF	950729
200A	NKA20HD6-AP3-AC220/230/240A3P11MTF	218178
200A	NKA20HD6-AP3-AC230/240/240TF	950585
200A	NKA20HD6-AP3-AC230/240/240MTF	950777
200A	NKA20HD6-AP3-BC110TF	950623
200A	NKA20HD6-AP3-BC110MTF	950615
200A	NKA20HD6-AP3-BC220TF	950621
200A	NKA20HD6-AP3-BC220MTF	950641
200A	NKA20HD6-HF3-AC220/230/240TF	211906
200A	NKA20HD6-HF3-AC220/230/240MTF	211907
200A	NKA20HD6-HF3-AC230/240/240TF	211908
200A	NKA20HD6-HF3-AC230/240/240MTF	211909
200A	NKA20HD6-HF3-BC110TF	211910
200A	NKA20HD6-HF3-BC110MTF	211911
200A	NKA20HD6-HF3-BC220TF	211912
200A	NKA20HD6-HF3-BC220MTF	211913
200A	NKA20HD6-AP3-AC220/230/240TF	950541
200A	NKA20HD6-AP3-AC220/230/240-3P11MTF	215992
200A	NKA20HD6-AP3-AC220/230/240MTF	950723
200A	NKA20HD6-AP3-AC220/230/240A3P11MTF	215993
200A	NKA20HD6-AP3-AC230/240/240TF	950589
200A	NKA20HD6-AP3-AC230/240/240MTF	950721
200A	NKA20HD6-AP3-BC110TF	950637
200A	NKA20HD6-AP3-BC110MTF	950617
200A	NKA20HD6-AP3-BC220TF	950635
200A	NKA20HD6-AP3-BC220MTF	950635
200A	NKA20HD6-PP3-AC220/230/240TF	211874
200A	NKA20HD6-PP3-AC220/230/240MTF	211875
200A	NKA20HD6-PP3-AC230/240/240TF	211876
200A	NKA20HD6-PP3-AC230/240/240MTF	211877
200A	NKA20HD6-PP3-BC110TF	211878
200A	NKA20HD6-PP3-BC110MTF	211879
200A	NKA20HD6-PP3-BC220TF	211880
200A	NKA20HD6-PP3-BC220MTF	211881
300A	NKA20HD8-AP3-AC220/230/240TF	950545
300A	NKA20HD8-AP3-AC220/230/240-3P11MTF	218161
300A	NKA20HD8-AP3-AC220/230/240MTF	950737
300A	NKA20HD8-AP3-AC220/230/240A3P11MTF	218179

NKA-20000 Fixed 3P

Rated Current	Description	Code
300A	NKA20 H03-AF3-AC220/400/41.5TF	952390
300A	NKA20 H03-AF3-AC220/400/41.5ATF	952391
300A	NKA20 H03-AF3-BC110TF	952391
300A	NKA20 H03-AF3-BC110ATF	952391
300A	NKA20 H03-AF3-BC220TF	952390
300A	NKA20 H03-AF3-BC220ATF	952390
300A	NKA20 H03-HF3-AC220/220/240TF	212040
300A	NKA20 H03-HF3-AC220/220/240ATF	212041
300A	NKA20 H03-HF3-AC220/400/41.5TF	212041
300A	NKA20 H03-HF3-AC220/400/41.5ATF	212042
300A	NKA20 H03-HF3-BC110TF	212043
300A	NKA20 H03-HF3-BC110ATF	212043
300A	NKA20 H03-HF3-BC220TF	212042
300A	NKA20 H03-HF3-BC220ATF	212042
300A	NKA20 H03-WF3-AC220/220/240TF	952399
300A	NKA20 H03-WF3-AC220/220/240-3P11HTF	212994
300A	NKA20 H03-WF3-AC220/220/240ATF	952399
300A	NKA20 H03-WF3-AC220/220/240A-3P11HTF	212995
300A	NKA20 H03-WF3-AC220/400/41.5TF	952399
300A	NKA20 H03-WF3-AC220/400/41.5ATF	952399
300A	NKA20 H03-WF3-BC110TF	952398
300A	NKA20 H03-WF3-BC110ATF	952398
300A	NKA20 H03-WF3-BC220TF	952398
300A	NKA20 H03-WF3-BC220ATF	952398
300A	NKA20 H03-FF3-AC220/220/240TF	212008
300A	NKA20 H03-FF3-AC220/220/240ATF	212009
300A	NKA20 H03-FF3-AC220/400/41.5TF	212010
300A	NKA20 H03-FF3-AC220/400/41.5ATF	212011
300A	NKA20 H03-FF3-BC110TF	212012
300A	NKA20 H03-FF3-BC110ATF	212013
300A	NKA20 H03-FF3-BC220TF	212012
300A	NKA20 H03-FF3-BC220ATF	212013
1000A	NKA20 H10-AF3-AC220/220/240TF	952393
1000A	NKA20 H10-AF3-AC220/220/240-3P11HTF	212120
1000A	NKA20 H10-AF3-AC220/220/240ATF	952393
1000A	NKA20 H10-AF3-AC220/220/240A-3P11HTF	212120
1000A	NKA20 H10-AF3-AC220/400/41.5TF	952393
1000A	NKA20 H10-AF3-AC220/400/41.5ATF	952393
1000A	NKA20 H10-AF3-BC110TF	952399
1000A	NKA20 H10-AF3-BC110ATF	952399
1000A	NKA20 H10-AF3-BC220TF	952399
1000A	NKA20 H10-AF3-BC220ATF	952399
1000A	NKA20 H10-HF3-AC220/220/240TF	212102
1000A	NKA20 H10-HF3-AC220/220/240ATF	212103

NKA-20000 Fixed 3P

Rated Current	Description	Code
1000A	NKA20 H10-AF3-BC220TF	952399
1000A	NKA20 H10-AF3-BC220ATF	952399
1000A	NKA20 H10-HF3-AC220/220/240TF	212028
1000A	NKA20 H10-HF3-AC220/220/240ATF	212029
1000A	NKA20 H10-HF3-AC220/400/41.5TF	212030
1000A	NKA20 H10-HF3-AC220/400/41.5ATF	212031
1000A	NKA20 H10-HF3-BC110TF	212032
1000A	NKA20 H10-HF3-BC110ATF	212033
1000A	NKA20 H10-HF3-BC220TF	212034
1000A	NKA20 H10-HF3-BC220ATF	212035
1000A	NKA20 H10-WF3-AC220/220/240TF	952399
1000A	NKA20 H10-WF3-AC220/220/240-3P11HTF	212996
1000A	NKA20 H10-WF3-AC220/220/240ATF	952399
1000A	NKA20 H10-WF3-AC220/220/240A-3P11HTF	212997
1000A	NKA20 H10-WF3-AC220/400/41.5TF	952399
1000A	NKA20 H10-WF3-AC220/400/41.5ATF	952399
1000A	NKA20 H10-WF3-BC110TF	952399
1000A	NKA20 H10-WF3-BC110ATF	952399
1000A	NKA20 H10-WF3-BC220TF	952399
1000A	NKA20 H10-WF3-BC220ATF	952399
1000A	NKA20 H10-FF3-AC220/220/240TF	212008
1000A	NKA20 H10-FF3-AC220/220/240ATF	212009
1000A	NKA20 H10-FF3-AC220/400/41.5TF	212008
1000A	NKA20 H10-FF3-AC220/400/41.5ATF	212009
1000A	NKA20 H10-FF3-BC110TF	212010
1000A	NKA20 H10-FF3-BC110ATF	212011
1000A	NKA20 H10-FF3-BC220TF	212012
1000A	NKA20 H10-FF3-BC220ATF	212013
1250A	NKA20 H12-AF3-AC220/220/240TF	952394
1250A	NKA20 H12-AF3-AC220/220/240-3P11HTF	212120
1250A	NKA20 H12-AF3-AC220/220/240ATF	952394
1250A	NKA20 H12-AF3-AC220/220/240A-3P11HTF	212120
1250A	NKA20 H12-AF3-AC220/400/41.5TF	952399
1250A	NKA20 H12-AF3-AC220/400/41.5ATF	952399
1250A	NKA20 H12-AF3-BC110TF	952399
1250A	NKA20 H12-AF3-BC110ATF	952399
1250A	NKA20 H12-AF3-BC220TF	952399
1250A	NKA20 H12-AF3-BC220ATF	952399
1250A	NKA20 H12-HF3-AC220/220/240TF	212102
1250A	NKA20 H12-HF3-AC220/220/240ATF	212103

NKA-2000 Fixed 3P

Rated Current	Description	Code
1250A	NKA20 H12-H P3-AC200/400/415TF	212104
1250A	NKA20 H12-H P3-AC200/400/415ANTF	212105
1250A	NKA20 H12-H P3-BC110TF	212106
1250A	NKA20 H12-H P3-BC110ANTF	212107
1250A	NKA20 H12-H P3-BC220TF	212108
1250A	NKA20 H12-H P3-BC220ANTF	212109
1250A	NKA20 H12-W P3-AC220/230/240TF	932553
1250A	NKA20 H12-W P3-AC220/230/240-3P1HTF	212598
1250A	NKA20 H12-W P3-AC220/230/240ANTF	932557
1250A	NKA20 H12-W P3-AC220/230/240-3P1HTF	212599
1250A	NKA20 H12-W P3-AC200/400/415TF	932613
1250A	NKA20 H12-W P3-AC200/400/415ANTF	932605
1250A	NKA20 H12-W P3-BC110TF	932651
1250A	NKA20 H12-W P3-BC110ANTF	932641
1250A	NKA20 H12-W P3-BC220TF	932709
1250A	NKA20 H12-W P3-BC220ANTF	932709
1250A	NKA20 H12-F P3-AC220/230/240TF	212070
1250A	NKA20 H12-F P3-AC220/230/240ANTF	212071
1250A	NKA20 H12-F P3-AC200/400/415TF	212072
1250A	NKA20 H12-F P3-AC200/400/415ANTF	212073
1250A	NKA20 H12-F P3-BC110TF	212074
1250A	NKA20 H12-F P3-BC110ANTF	212075
1250A	NKA20 H12-F P3-BC220TF	212076
1250A	NKA20 H12-F P3-BC220ANTF	212077
1600A	NKA20 H16-A P3-AC220/230/240TF	932559
1600A	NKA20 H16-A P3-AC220/230/240-3P1HTF	212154
1600A	NKA20 H16-A P3-AC220/230/240ANTF	932561
1600A	NKA20 H16-A P3-AC220/230/240-3P1HTF	212155
1600A	NKA20 H16-A P3-AC200/400/415TF	932617
1600A	NKA20 H16-A P3-AC200/400/415ANTF	932609
1600A	NKA20 H16-A P3-BC110TF	932655
1600A	NKA20 H16-A P3-BC110ANTF	932645
1600A	NKA20 H16-A P3-BC220TF	932713
1600A	NKA20 H16-A P3-BC220ANTF	932703
1600A	NKA20 H16-H P3-AC220/230/240TF	212156
1600A	NKA20 H16-H P3-AC220/230/240ANTF	212157
1600A	NKA20 H16-H P3-AC200/400/415TF	212158
1600A	NKA20 H16-H P3-AC200/400/415ANTF	212159
1600A	NKA20 H16-H P3-BC110TF	212170
1600A	NKA20 H16-H P3-BC110ANTF	212171

NKA-2000 Fixed 3P

Rated Current	Description	Code
1600A	NKA20 H16-H P3-BC220TF	212172
1600A	NKA20 H16-H P3-BC220ANTF	212173
1600A	NKA20 H16-W P3-AC220/230/240TF	932573
1600A	NKA20 H16-W P3-AC220/230/240-3P1HTF	212670
1600A	NKA20 H16-W P3-AC220/230/240ANTF	932587
1600A	NKA20 H16-W P3-AC220/230/240-3P1HTF	212671
1600A	NKA20 H16-W P3-AC200/400/415TF	932621
1600A	NKA20 H16-W P3-AC200/400/415ANTF	932601
1600A	NKA20 H16-W P3-BC110TF	932659
1600A	NKA20 H16-W P3-BC110ANTF	932649
1600A	NKA20 H16-W P3-BC220TF	932717
1600A	NKA20 H16-W P3-BC220ANTF	932707
1600A	NKA20 H16-F P3-AC220/230/240TF	212138
1600A	NKA20 H16-F P3-AC220/230/240ANTF	212135
1600A	NKA20 H16-F P3-AC200/400/415TF	212136
1600A	NKA20 H16-F P3-AC200/400/415ANTF	212137
1600A	NKA20 H16-F P3-BC110TF	212138
1600A	NKA20 H16-F P3-BC110ANTF	212139
1600A	NKA20 H16-F P3-BC220TF	212140
1600A	NKA20 H16-F P3-BC220ANTF	212141
2000A	NKA20 H20-A P3-AC220/230/240TF	932577
2000A	NKA20 H20-A P3-AC220/230/240-3P1HTF	212685
2000A	NKA20 H20-A P3-AC220/230/240ANTF	932589
2000A	NKA20 H20-A P3-AC220/230/240-3P1HTF	212683
2000A	NKA20 H20-A P3-AC200/400/415TF	932625
2000A	NKA20 H20-A P3-AC200/400/415ANTF	932605
2000A	NKA20 H20-A P3-BC110TF	932673
2000A	NKA20 H20-A P3-BC110ANTF	932653
2000A	NKA20 H20-A P3-BC220TF	932721
2000A	NKA20 H20-A P3-BC220ANTF	932701
2000A	NKA20 H20-H P3-AC220/230/240TF	212230
2000A	NKA20 H20-H P3-AC220/230/240ANTF	212231
2000A	NKA20 H20-H P3-AC200/400/415TF	212232
2000A	NKA20 H20-H P3-AC200/400/415ANTF	212233
2000A	NKA20 H20-H P3-BC110TF	212234
2000A	NKA20 H20-H P3-BC110ANTF	212235
2000A	NKA20 H20-H P3-BC220TF	212236
2000A	NKA20 H20-H P3-BC220ANTF	212237
2000A	NKA20 H20-W P3-AC220/230/240TF	932597
2000A	NKA20 H20-W P3-AC220/230/240-3P1HTF	212675

NKA-20000 Fixed 3P

Rated Current	Description	Code
2000A	NKA20 H20-AP3-AC220/230/240WTF	942172
2000A	NKA20 H20-AP3-AC220/230/240W-3P11WTF	212073
2000A	NKA20 H20-AP3-AC280/300/315TF	942189
2000A	NKA20 H20-AP3-AC280/300/315WTF	942089
2000A	NKA20 H20-AP3-BC110TF	942187
2000A	NKA20 H20-AP3-BC110WTF	942185
2000A	NKA20 H20-AP3-BC220TF	942125
2000A	NKA20 H20-AP3-BC220WTF	942105
2000A	NKA20 H20-PP3-AC220/230/240TF	212198
2000A	NKA20 H20-PP3-AC220/230/240WTF	212199
2000A	NKA20 H20-PP3-AC280/300/315TF	212200
2000A	NKA20 H20-PP3-AC280/300/315WTF	212201
2000A	NKA20 H20-PP3-BC110TF	212202
2000A	NKA20 H20-PP3-BC110WTF	212203
2000A	NKA20 H20-PP3-BC220TF	212204
2000A	NKA20 H20-PP3-BC220WTF	212205
200A	NKA20 H05-AP3-AC220/230/240TF	940285
200A	NKA20 H05-AP3-AC220/230/240-3P11WTF	212140
200A	NKA20 H05-AP3-AC220/230/240WTF	942181
200A	NKA20 H05-AP3-AC220/230/240W-3P11WTF	212148
200A	NKA20 H05-AP3-AC280/300/315TF	940400
200A	NKA20 H05-AP3-AC280/300/315WTF	942183
200A	NKA20 H05-AP3-BC110TF	940481
200A	NKA20 H05-AP3-BC110WTF	942180
200A	NKA20 H05-AP3-BC220TF	942027
200A	NKA20 H05-AP3-BC220WTF	942185
200A	NKA20 H05-HF3-AC220/230/240TF	212294
200A	NKA20 H05-HF3-AC220/230/240WTF	212295
200A	NKA20 H05-HF3-AC280/300/315TF	212296
200A	NKA20 H05-HF3-AC280/300/315WTF	212297
200A	NKA20 H05-HF3-BC110TF	212298
200A	NKA20 H05-HF3-BC110WTF	212299
200A	NKA20 H05-HF3-BC220TF	212300
200A	NKA20 H05-HF3-BC220WTF	212301
200A	NKA20 H05-AP3-AC220/230/240TF	940289
200A	NKA20 H05-AP3-AC220/230/240-3P11WTF	212074
200A	NKA20 H05-AP3-AC220/230/240WTF	942185
200A	NKA20 H05-AP3-AC220/230/240W-3P11WTF	212075
200A	NKA20 H05-AP3-AC280/300/315TF	940407
200A	NKA20 H05-AP3-AC280/300/315WTF	942183

NKA-20000 Fixed 3P

Rated Current	Description	Code
200A	NKA20 H05-AP3-BC110TF	940483
200A	NKA20 H05-AP3-BC110WTF	942191
200A	NKA20 H05-AP3-BC220TF	942001
200A	NKA20 H05-AP3-BC220WTF	942189
200A	NKA20 H05-PP3-AC220/230/240TF	212282
200A	NKA20 H05-PP3-AC220/230/240WTF	212283
200A	NKA20 H05-PP3-AC280/300/315TF	212284
200A	NKA20 H05-PP3-AC280/300/315WTF	212285
200A	NKA20 H05-PP3-BC110TF	212286
200A	NKA20 H05-PP3-BC110WTF	212287
200A	NKA20 H05-PP3-BC220TF	212288
200A	NKA20 H05-PP3-BC220WTF	212289
200A	NKA20 H08-AP3-AC220/230/240TF	940292
200A	NKA20 H08-AP3-AC220/230/240-3P11WTF	212181
200A	NKA20 H08-AP3-AC220/230/240WTF	942189
200A	NKA20 H08-AP3-AC220/230/240W-3P11WTF	212147
200A	NKA20 H08-AP3-AC280/300/315TF	940441
200A	NKA20 H08-AP3-AC280/300/315WTF	942187
200A	NKA20 H08-AP3-BC110TF	940489
200A	NKA20 H08-AP3-BC110WTF	942191
200A	NKA20 H08-AP3-BC220TF	942003
200A	NKA20 H08-AP3-BC220WTF	942180
200A	NKA20 H08-HF3-AC220/230/240TF	212288
200A	NKA20 H08-HF3-AC220/230/240WTF	212289
200A	NKA20 H08-HF3-AC280/300/315TF	212290
200A	NKA20 H08-HF3-AC280/300/315WTF	212291
200A	NKA20 H08-HF3-BC110TF	212292
200A	NKA20 H08-HF3-BC110WTF	212293
200A	NKA20 H08-HF3-BC220TF	212294
200A	NKA20 H08-HF3-BC220WTF	212295
200A	NKA20 H08-AP3-AC220/230/240TF	940297
200A	NKA20 H08-AP3-AC220/230/240-3P11WTF	212076
200A	NKA20 H08-AP3-AC220/230/240WTF	942192
200A	NKA20 H08-AP3-AC220/230/240W-3P11WTF	212077
200A	NKA20 H08-AP3-AC280/300/315TF	940443
200A	NKA20 H08-AP3-AC280/300/315WTF	942191
200A	NKA20 H08-AP3-BC110TF	940492
200A	NKA20 H08-AP3-BC110WTF	942193
200A	NKA20 H08-AP3-BC220TF	942009
200A	NKA20 H08-AP3-BC220WTF	942190

NKA-2000 Fixed 3P

Rated Current	Description	Code
300A	NKA20 N08-FF3-AC220/230V/240TF	212328
300A	NKA20 N08-FF3-AC220/230V/240WTF	212327
300A	NKA20 N08-FF3-AC280/300V/315TF	212328
300A	NKA20 N08-FF3-AC280/300V/315WTF	212329
300A	NKA20 N08-FF3-BC110TF	212330
300A	NKA20 N08-FF3-BC110WTF	212331
300A	NKA20 N08-FF3-BC220TF	212332
300A	NKA20 N08-FF3-BC220WTF	212333
1000A	NKA20 N10-AF3-AC220/230V/240TF	940401
1000A	NKA20 N10-AF3-AC220/230V/240-3P1 HTF	212142
1000A	NKA20 N10-AF3-AC220/230V/240WTF	940407
1000A	NKA20 N10-AF3-AC220/230V/240W-3P1 HTF	212143
1000A	NKA20 N10-AF3-AC280/300V/315TF	940448
1000A	NKA20 N10-AF3-AC280/300V/315WTF	940403
1000A	NKA20 N10-AF3-BC110TF	940404
1000A	NKA20 N10-AF3-BC110WTF	940922
1000A	NKA20 N10-AF3-BC220TF	940443
1000A	NKA20 N10-AF3-BC220WTF	940901
1000A	NKA20 N10-HF3-AC220/230V/240TF	212422
1000A	NKA20 N10-HF3-AC220/230V/240WTF	212423
1000A	NKA20 N10-HF3-AC280/300V/315TF	212424
1000A	NKA20 N10-HF3-AC280/300V/315WTF	212425
1000A	NKA20 N10-HF3-BC110TF	212426
1000A	NKA20 N10-HF3-BC110WTF	212427
1000A	NKA20 N10-HF3-BC220TF	212428
1000A	NKA20 N10-HF3-BC220WTF	212429
1000A	NKA20 N10-AF3-AC220/230V/240TF	940405
1000A	NKA20 N10-AF3-AC220/230V/240-3P1 HTF	212008
1000A	NKA20 N10-AF3-AC220/230V/240WTF	940401
1000A	NKA20 N10-AF3-AC220/230V/240W-3P1 HTF	212009
1000A	NKA20 N10-AF3-AC280/300V/315TF	940452
1000A	NKA20 N10-AF3-AC280/300V/315WTF	940409
1000A	NKA20 N10-AF3-BC110TF	940401
1000A	NKA20 N10-AF3-BC110WTF	940927
1000A	NKA20 N10-AF3-BC220TF	940447
1000A	NKA20 N10-AF3-BC220WTF	940923
1000A	NKA20 N10-FF3-AC220/230V/240TF	212390
1000A	NKA20 N10-FF3-AC220/230V/240WTF	212391
1000A	NKA20 N10-FF3-AC280/300V/315TF	212392
1000A	NKA20 N10-FF3-AC280/300V/315WTF	212393

NKA-2000 Fixed 3P

Rated Current	Description	Code
1000A	NKA20 N10-FF3-BC110TF	212394
1000A	NKA20 N10-FF3-BC110WTF	212395
1000A	NKA20 N10-FF3-BC220TF	212396
1000A	NKA20 N10-FF3-BC220WTF	212397
1250A	NKA20 N12-AF3-AC220/230V/240TF	940409
1250A	NKA20 N12-AF3-AC220/230V/240-3P1 HTF	212145
1250A	NKA20 N12-AF3-AC220/230V/240WTF	940453
1250A	NKA20 N12-AF3-AC220/230V/240W-3P1 HTF	212149
1250A	NKA20 N12-AF3-AC280/300V/315TF	940457
1250A	NKA20 N12-AF3-AC280/300V/315WTF	940455
1250A	NKA20 N12-AF3-BC110TF	940405
1250A	NKA20 N12-AF3-BC110WTF	940921
1250A	NKA20 N12-AF3-BC220TF	940451
1250A	NKA20 N12-AF3-BC220WTF	940909
1250A	NKA20 N12-HF3-AC220/230V/240TF	212486
1250A	NKA20 N12-HF3-AC220/230V/240WTF	212487
1250A	NKA20 N12-HF3-AC280/300V/315TF	212488
1250A	NKA20 N12-HF3-AC280/300V/315WTF	212489
1250A	NKA20 N12-HF3-BC110TF	212490
1250A	NKA20 N12-HF3-BC110WTF	212491
1250A	NKA20 N12-HF3-BC220TF	212492
1250A	NKA20 N12-HF3-BC220WTF	212493
1250A	NKA20 N12-AF3-AC220/230V/240TF	940412
1250A	NKA20 N12-AF3-AC220/230V/240-3P1 HTF	212010
1250A	NKA20 N12-AF3-AC220/230V/240WTF	940459
1250A	NKA20 N12-AF3-AC220/230V/240W-3P1 HTF	212011
1250A	NKA20 N12-AF3-AC280/300V/315TF	940461
1250A	NKA20 N12-AF3-AC280/300V/315WTF	940467
1250A	NKA20 N12-AF3-BC110TF	940401
1250A	NKA20 N12-AF3-BC110WTF	940925
1250A	NKA20 N12-AF3-BC220TF	940455
1250A	NKA20 N12-AF3-BC220WTF	940929
1250A	NKA20 N12-FF3-AC220/230V/240TF	212454
1250A	NKA20 N12-FF3-AC220/230V/240WTF	212455
1250A	NKA20 N12-FF3-AC280/300V/315TF	212456
1250A	NKA20 N12-FF3-AC280/300V/315WTF	212457
1250A	NKA20 N12-FF3-BC110TF	212458
1250A	NKA20 N12-FF3-BC110WTF	212459
1250A	NKA20 N12-FF3-BC220TF	212460
1250A	NKA20 N12-FF3-BC220WTF	212461

NKA-2000 Fixed 3P

Rated Current	Description	Code
1600A	NKA20 H16-AP3-AC220/220/240TF	940417
1600A	NKA20 H16-AP3-AC220/220/240-3TF1HTF	940444
1600A	NKA20 H16-AP3-AC220/220/240ATF	940443
1600A	NKA20 H16-AP3-AC220/220/240A-3TF1HTF	940430
1600A	NKA20 H16-AP3-AC220/400/415TF	940455
1600A	NKA20 H16-AP3-AC220/400/415ATF	940491
1600A	NKA20 H16-AP3-BC110TF	940411
1600A	NKA20 H16-AP3-BC110ATF	940429
1600A	NKA20 H16-AP3-BC220TF	940439
1600A	NKA20 H16-AP3-BC220ATF	940487
1600A	NKA20 H16-HF3-AC220/220/240TF	940480
1600A	NKA20 H16-HF3-AC220/220/240ATF	940481
1600A	NKA20 H16-HF3-AC220/400/415TF	940482
1600A	NKA20 H16-HF3-AC220/400/415ATF	940483
1600A	NKA20 H16-HF3-BC110TF	940484
1600A	NKA20 H16-HF3-BC110ATF	940485
1600A	NKA20 H16-HF3-BC220TF	940486
1600A	NKA20 H16-HF3-BC220ATF	940487
1600A	NKA20 H16-AP3-AC220/220/240TF	940421
1600A	NKA20 H16-AP3-AC220/220/240-3TF1HTF	940482
1600A	NKA20 H16-AP3-AC220/220/240ATF	940445
1600A	NKA20 H16-AP3-AC220/220/240A-3TF1HTF	940483
1600A	NKA20 H16-AP3-AC220/400/415TF	940449
1600A	NKA20 H16-AP3-AC220/400/415ATF	940495
1600A	NKA20 H16-AP3-BC110TF	940415
1600A	NKA20 H16-AP3-BC110ATF	940443
1600A	NKA20 H16-AP3-BC220TF	940483
1600A	NKA20 H16-AP3-BC220ATF	940491
1600A	NKA20 H16-PP3-AC220/220/240TF	940448
1600A	NKA20 H16-PP3-AC220/220/240ATF	940449
1600A	NKA20 H16-PP3-AC220/400/415TF	940450
1600A	NKA20 H16-PP3-AC220/400/415ATF	940451
1600A	NKA20 H16-PP3-BC110TF	940452
1600A	NKA20 H16-PP3-BC110ATF	940453
1600A	NKA20 H16-PP3-BC220TF	940454
1600A	NKA20 H16-PP3-BC220ATF	940455
2000A	NKA20 H20-AP3-AC220/220/240TF	940423
2000A	NKA20 H20-AP3-AC220/220/240-3TF1HTF	940445
2000A	NKA20 H20-AP3-AC220/220/240ATF	940441
2000A	NKA20 H20-AP3-AC220/220/240A-3TF1HTF	940431

NKA-2000 Fixed 3P

Rated Current	Description	Code
2000A	NKA20 H20-AP3-AC220/400/415TF	940473
2000A	NKA20 H20-AP3-AC220/400/415ATF	940499
2000A	NKA20 H20-AP3-BC110TF	940419
2000A	NKA20 H20-AP3-BC110ATF	940447
2000A	NKA20 H20-AP3-BC220TF	940457
2000A	NKA20 H20-AP3-BC220ATF	940493
2000A	NKA20 H20-HF3-AC220/220/240TF	940444
2000A	NKA20 H20-HF3-AC220/220/240ATF	940445
2000A	NKA20 H20-HF3-AC220/400/415TF	940446
2000A	NKA20 H20-HF3-AC220/400/415ATF	940447
2000A	NKA20 H20-HF3-BC110TF	940448
2000A	NKA20 H20-HF3-BC110ATF	940449
2000A	NKA20 H20-HF3-BC220TF	940450
2000A	NKA20 H20-HF3-BC220ATF	940451
2000A	NKA20 H20-AP3-AC220/220/240TF	940429
2000A	NKA20 H20-AP3-AC220/220/240-3TF1HTF	940484
2000A	NKA20 H20-AP3-AC220/220/240ATF	940455
2000A	NKA20 H20-AP3-AC220/220/240A-3TF1HTF	940485
2000A	NKA20 H20-AP3-AC220/400/415TF	940477
2000A	NKA20 H20-AP3-AC220/400/415ATF	940490
2000A	NKA20 H20-AP3-BC110TF	940420
2000A	NKA20 H20-AP3-BC110ATF	940431
2000A	NKA20 H20-AP3-BC220TF	940471
2000A	NKA20 H20-AP3-BC220ATF	940499
2000A	NKA20 H20-PP3-AC220/220/240TF	940412
2000A	NKA20 H20-PP3-AC220/220/240ATF	940413
2000A	NKA20 H20-PP3-AC220/400/415TF	940414
2000A	NKA20 H20-PP3-AC220/400/415ATF	940415
2000A	NKA20 H20-PP3-BC110TF	940416
2000A	NKA20 H20-PP3-BC110ATF	940417
2000A	NKA20 H20-PP3-BC220TF	940418
2000A	NKA20 H20-PP3-BC220ATF	940419
220A	NKA20 S0.6-AP3-AC220/220/240TF	103448
220A	NKA20 S0.6-AP3-AC220/220/240ATF	192240
220A	NKA20 S0.6-AP3-AC220/400/415TF	103414
220A	NKA20 S0.6-AP3-AC220/400/415ATF	192238
220A	NKA20 S0.6-HF3-AC220/220/240TF	940434
220A	NKA20 S0.6-HF3-AC220/220/240ATF	940435
220A	NKA20 S0.6-HF3-AC220/400/415TF	940436
220A	NKA20 S0.6-HF3-AC220/400/415ATF	940437

NKA-2000 Fixed 3P

Rated Current	Description	Code
400A	NKA20503-WP3-AC220/220/240TF	103473
400A	NKA20503-WP3-AC220/220/240-3P1 NTP	214084
400A	NKA20503-WP3-AC220/220/240WTF	192364
400A	NKA20503-WP3-AC220/220/240W-3P1 NTP	214087
400A	NKA20503-WP3-AC220/400/415TF	103490
400A	NKA20503-WP3-AC220/400/415WTF	192392
400A	NKA20503-WP3-AC220/220/240TF	214463
400A	NKA20503-WP3-AC220/220/240WTF	214469
400A	NKA20503-WP3-AC220/400/415TF	214470
400A	NKA20503-WP3-AC220/400/415WTF	214471
600A	NKA20503-WP3-AC220/220/240TF	103474
600A	NKA20503-WP3-AC220/220/240WTF	192368
600A	NKA20503-WP3-AC220/220/240W-3P1 NTP	214091
600A	NKA20503-WP3-AC220/400/415TF	103494
600A	NKA20503-WP3-AC220/400/415WTF	192396
800A	NKA20503-WP3-AC220/220/240TF	214716
800A	NKA20503-WP3-AC220/220/240WTF	214717
800A	NKA20503-WP3-AC220/400/415TF	214718
800A	NKA20503-WP3-AC220/400/415WTF	214719
800A	NKA20503-WP3-AC220/220/240TF	103480
800A	NKA20503-WP3-AC220/220/240-3P1 NTP	214088
800A	NKA20503-WP3-AC220/220/240WTF	192363
800A	NKA20503-WP3-AC220/220/240W-3P1 NTP	214089
800A	NKA20503-WP3-AC220/400/415TF	103498
800A	NKA20503-WP3-AC220/400/415WTF	192400
800A	NKA20503-WP3-AC220/220/240TF	214700
800A	NKA20503-WP3-AC220/220/240WTF	214701
800A	NKA20503-WP3-AC220/400/415TF	214702
800A	NKA20503-WP3-AC220/400/415WTF	214703
1000A	NKA20510-WP3-AC220/220/240TF	103484
1000A	NKA20510-WP3-AC220/220/240WTF	192366
1000A	NKA20510-WP3-AC220/400/415TF	103497
1000A	NKA20510-WP3-AC220/400/415WTF	192404
1000A	NKA20510-WP3-AC220/220/240TF	214708
1000A	NKA20510-WP3-AC220/220/240WTF	214709
1000A	NKA20510-WP3-AC220/400/415TF	214710
1000A	NKA20510-WP3-AC220/400/415WTF	214711
1000A	NKA20510-WP3-AC220/220/240TF	103488
1000A	NKA20510-WP3-AC220/220/240-3P1 NTP	214090
1000A	NKA20510-WP3-AC220/220/240WTF	192360

NKA-2000 Fixed 3P

Rated Current	Description	Code
1000A	NKA20510-WP3-AC220/220/240W-3P1 NTP	214091
1000A	NKA20510-WP3-AC220/400/415TF	103496
1000A	NKA20510-WP3-AC220/400/415WTF	192402
1000A	NKA20510-WP3-AC220/220/240TF	214722
1000A	NKA20510-WP3-AC220/220/240WTF	214723
1000A	NKA20510-WP3-AC220/400/415WTF	214724
1000A	NKA20510-WP3-AC220/220/240TF	103493
1250A	NKA20512-WP3-AC220/220/240WTF	192364
1250A	NKA20512-WP3-AC220/220/240W-3P1 NTP	214092
1250A	NKA20512-WP3-AC220/400/415TF	103490
1250A	NKA20512-WP3-AC220/400/415WTF	192412
1250A	NKA20512-WP3-AC220/220/240TF	214720
1250A	NKA20512-WP3-AC220/220/240WTF	214721
1250A	NKA20512-WP3-AC220/400/415TF	214722
1250A	NKA20512-WP3-AC220/400/415WTF	214723
1250A	NKA20512-WP3-AC220/220/240TF	103496
1250A	NKA20512-WP3-AC220/220/240-3P1 NTP	214093
1250A	NKA20512-WP3-AC220/220/240W-3P1 NTP	214094
1250A	NKA20512-WP3-AC220/400/415TF	103494
1250A	NKA20512-WP3-AC220/400/415WTF	192416
1250A	NKA20512-WP3-AC220/220/240TF	214724
1250A	NKA20512-WP3-AC220/220/240WTF	214725
1250A	NKA20512-WP3-AC220/400/415TF	214726
1250A	NKA20512-WP3-AC220/400/415WTF	214727
1600A	NKA20516-WP3-AC220/220/240TF	103490
1600A	NKA20516-WP3-AC220/220/240WTF	192372
1600A	NKA20516-WP3-AC220/220/240W-3P1 NTP	214095
1600A	NKA20516-WP3-AC220/400/415TF	103498
1600A	NKA20516-WP3-AC220/400/415WTF	192420
1600A	NKA20516-WP3-AC220/220/240TF	214812
1600A	NKA20516-WP3-AC220/220/240WTF	214813
1600A	NKA20516-WP3-AC220/400/415TF	214814
1600A	NKA20516-WP3-AC220/400/415WTF	214815
1600A	NKA20516-WP3-AC220/220/240TF	103493
1600A	NKA20516-WP3-AC220/220/240-3P1 NTP	214096
1600A	NKA20516-WP3-AC220/220/240WTF	192376
1600A	NKA20516-WP3-AC220/220/240W-3P1 NTP	214097
1600A	NKA20516-WP3-AC220/400/415TF	103497

NXA-2000 Fixed 3P

Rated Current	Description	Code
1600A	NXA20016-WP3-AC220/230/240V	192424
1600A	NXA20016-FP3-AC220/230/240V	214746
1600A	NXA20016-FP3-AC220/230/240VTF	214797
1600A	NXA20016-FP3-AC230/400/415V	214798
1600A	NXA20016-FP3-AC230/400/415VTF	214799
2000A	NXA20020-WP3-AC220/230/240V	188508
2000A	NXA20020-WP3-AC220/230/240VTF	192336
2000A	NXA20020-WP3-AC220/230/240V-2P11NTP	219034
2000A	NXA20020-WP3-AC230/400/415V	188536
2000A	NXA20020-WP3-AC230/400/415VTF	192428
2000A	NXA20020-HP3-AC220/230/240V	214844
2000A	NXA20020-HP3-AC220/230/240VTF	214845
2000A	NXA20020-HP3-AC230/400/415V	214846
2000A	NXA20020-HP3-AC230/400/415VTF	214847
2000A	NXA20020-WP3-AC220/230/240V	188512
2000A	NXA20020-WP3-AC220/230/240-2P11NTP	214896
2000A	NXA20020-WP3-AC220/230/240VTF	192334
2000A	NXA20020-WP3-AC220/230/240V-2P11NTP	214897
2000A	NXA20020-WP3-AC230/400/415V	188540
2000A	NXA20020-WP3-AC230/400/415VTF	192430
2000A	NXA20020-FP3-AC220/230/240V	214820
2000A	NXA20020-FP3-AC220/230/240VTF	214829
2000A	NXA20020-FP3-AC230/400/415V	214830
2000A	NXA20020-FP3-AC230/400/415VTF	214831

NXA-2000 Fixed 4P

Rated Current	Description	Code
630A	NXA20H06-AF4-AC220/230/240V	952509
630A	NXA20H06-AF4-AC220/230/240VTF	952511
630A	NXA20H06-AF4-AC230/400/415V	952517
630A	NXA20H06-AF4-AC230/400/415VTF	952579
630A	NXA20H06-AF4-DC110V	952613
630A	NXA20H06-AF4-DC110VTF	952615
630A	NXA20H06-AF4-DC220V	952620
630A	NXA20H06-AF4-DC220VTF	952663
630A	NXA20H06-HF4-AC220/230/240V	211914
630A	NXA20H06-HF4-AC220/230/240VTF	211915
630A	NXA20H06-HF4-AC230/400/415V	211916
630A	NXA20H06-HF4-AC230/400/415VTF	211917
630A	NXA20H06-HF4-DC110V	211918
630A	NXA20H06-HF4-DC110VTF	211919
630A	NXA20H06-HF4-DC220V	211920
630A	NXA20H06-HF4-DC220VTF	211921

NXA-2000 Fixed 4P

630A	NXA20H06-WF4-AC220/230/240V	952542
630A	NXA20H06-WF4-AC220/230/240VTF	952545
630A	NXA20H06-WF4-AC230/400/415V	952591
630A	NXA20H06-WF4-AC230/400/415VTF	952593
630A	NXA20H06-WF4-DC110V	952630
630A	NXA20H06-WF4-DC110VTF	952631
630A	NXA20H06-WF4-DC220V	952637
630A	NXA20H06-WF4-DC220VTF	952641
630A	NXA20H06-FF4-AC220/230/240V	211887
630A	NXA20H06-FF4-AC220/230/240VTF	211888
630A	NXA20H06-FF4-AC230/400/415V	211889
630A	NXA20H06-FF4-AC230/400/415VTF	211890
630A	NXA20H06-FF4-DC110V	211894
630A	NXA20H06-FF4-DC110VTF	211895
630A	NXA20H06-FF4-DC220V	211898
630A	NXA20H06-FF4-DC220VTF	211899
800A	NXA20H08-AF4-AC220/230/240V	952547
800A	NXA20H08-AF4-AC220/230/240VTF	952549
800A	NXA20H08-AF4-AC230/400/415V	952595
800A	NXA20H08-AF4-AC230/400/415VTF	952597
800A	NXA20H08-AF4-DC110V	952640
800A	NXA20H08-AF4-DC110VTF	952642
800A	NXA20H08-AF4-DC220V	952691
800A	NXA20H08-AF4-DC220VTF	952693
800A	NXA20H08-HF4-AC220/230/240V	211978
800A	NXA20H08-HF4-AC220/230/240VTF	211979
800A	NXA20H08-HF4-AC230/400/415V	211980
800A	NXA20H08-HF4-AC230/400/415VTF	211981
800A	NXA20H08-HF4-DC110V	211982
800A	NXA20H08-HF4-DC110VTF	211983
800A	NXA20H08-HF4-DC220V	211984
800A	NXA20H08-HF4-DC220VTF	211985
800A	NXA20H08-WF4-AC220/230/240V	952551
800A	NXA20H08-WF4-AC220/230/240VTF	952543
800A	NXA20H08-WF4-AC230/400/415V	952599
800A	NXA20H08-WF4-AC230/400/415VTF	952601
800A	NXA20H08-WF4-DC110V	952646
800A	NXA20H08-WF4-DC110VTF	952647
800A	NXA20H08-WF4-DC220V	952695
800A	NXA20H08-WF4-DC220VTF	952697

NKA-2000 Fixed 4P

Rated Current	Description	Code
300A	NKA20H03-FFA-AC220/230/240TF	211948
300A	NKA20H03-FFA-AC220/230/240WTF	211949
300A	NKA20H03-FFA-AC230/400/415TF	211948
300A	NKA20H03-FFA-AC230/400/415WTF	211949
300A	NKA20H03-FFA-BC110TF	211950
300A	NKA20H03-FFA-BC110WTF	211951
300A	NKA20H03-FFA-BC220TF	211952
300A	NKA20H03-FFA-BC220WTF	211953
1000A	NKA20H10-AFA-AC220/230/240TF	952555
1000A	NKA20H10-AFA-AC220/230/240WTF	952556
1000A	NKA20H10-AFA-AC230/400/415TF	952555
1000A	NKA20H10-AFA-AC230/400/415WTF	952556
1000A	NKA20H10-AFA-BC110TF	952557
1000A	NKA20H10-AFA-BC110WTF	952558
1000A	NKA20H10-AFA-BC220TF	952559
1000A	NKA20H10-AFA-BC220WTF	952560
1000A	NKA20H10-HFA-AC220/230/240TF	212048
1000A	NKA20H10-HFA-AC220/230/240WTF	212049
1000A	NKA20H10-HFA-AC230/400/415TF	212048
1000A	NKA20H10-HFA-AC230/400/415WTF	212049
1000A	NKA20H10-HFA-BC110TF	212050
1000A	NKA20H10-HFA-BC110WTF	212051
1000A	NKA20H10-HFA-BC220TF	212052
1000A	NKA20H10-HFA-BC220WTF	212053
1000A	NKA20H10-AFA-AC220/230/240TF	952559
1000A	NKA20H10-AFA-AC220/230/240WTF	952560
1000A	NKA20H10-AFA-AC230/400/415TF	952561
1000A	NKA20H10-AFA-AC230/400/415WTF	952562
1000A	NKA20H10-AFA-BC110TF	952563
1000A	NKA20H10-AFA-BC110WTF	952564
1000A	NKA20H10-AFA-BC220TF	952565
1000A	NKA20H10-AFA-BC220WTF	952566
1000A	NKA20H10-FFA-AC220/230/240TF	212054
1000A	NKA20H10-FFA-AC220/230/240WTF	212055
1000A	NKA20H10-FFA-AC230/400/415TF	212056
1000A	NKA20H10-FFA-AC230/400/415WTF	212057
1000A	NKA20H10-FFA-BC110TF	212058
1000A	NKA20H10-FFA-BC110WTF	212059
1000A	NKA20H10-FFA-BC220TF	212060
1000A	NKA20H10-FFA-BC220WTF	212061

NKA-2000 Fixed 4P

1250A	NKA20H12-AFA-AC220/230/240TF	952567
1250A	NKA20H12-AFA-AC220/230/240WTF	952568
1250A	NKA20H12-AFA-AC230/400/415TF	952569
1250A	NKA20H12-AFA-AC230/400/415WTF	952570
1250A	NKA20H12-AFA-BC110TF	952571
1250A	NKA20H12-AFA-BC110WTF	952572
1250A	NKA20H12-AFA-BC220TF	952573
1250A	NKA20H12-AFA-BC220WTF	952574
1250A	NKA20H12-HFA-AC220/230/240TF	212116
1250A	NKA20H12-HFA-AC220/230/240WTF	212117
1250A	NKA20H12-HFA-AC230/400/415TF	212118
1250A	NKA20H12-HFA-AC230/400/415WTF	212119
1250A	NKA20H12-HFA-BC110TF	212120
1250A	NKA20H12-HFA-BC110WTF	212121
1250A	NKA20H12-HFA-BC220TF	212122
1250A	NKA20H12-HFA-BC220WTF	212123
1250A	NKA20H12-AFA-AC220/230/240TF	952575
1250A	NKA20H12-AFA-AC220/230/240WTF	952576
1250A	NKA20H12-AFA-AC230/400/415TF	952577
1250A	NKA20H12-AFA-AC230/400/415WTF	952578
1250A	NKA20H12-AFA-BC110TF	952579
1250A	NKA20H12-AFA-BC110WTF	952580
1250A	NKA20H12-AFA-BC220TF	952581
1250A	NKA20H12-AFA-BC220WTF	952582
1250A	NKA20H12-FFA-AC220/230/240TF	212078
1250A	NKA20H12-FFA-AC220/230/240WTF	212079
1250A	NKA20H12-FFA-AC230/400/415TF	212080
1250A	NKA20H12-FFA-AC230/400/415WTF	212081
1250A	NKA20H12-FFA-BC110TF	212082
1250A	NKA20H12-FFA-BC110WTF	212083
1250A	NKA20H12-FFA-BC220TF	212084
1250A	NKA20H12-FFA-BC220WTF	212085
1600A	NKA20H16-AFA-AC220/230/240TF	952583
1600A	NKA20H16-AFA-AC220/230/240WTF	952584
1600A	NKA20H16-AFA-AC230/400/415TF	952585
1600A	NKA20H16-AFA-AC230/400/415WTF	952586
1600A	NKA20H16-AFA-BC110TF	952587
1600A	NKA20H16-AFA-BC110WTF	952588
1600A	NKA20H16-AFA-BC220TF	952589
1600A	NKA20H16-AFA-BC220WTF	952590

NKA-20000 Fixed 4P

Rated Current	Description	Code
1600A	NKA20 H1S-H F3-AC220/230/240TF	212178
1600A	NKA20 H1S-H F3-AC220/230/240WTF	212179
1600A	NKA20 H1S-H F3-AC230/240/241.5TF	212178
1600A	NKA20 H1S-H F3-AC230/240/241.5WTF	212179
1600A	NKA20 H1S-H F3-BC110TF	212178
1600A	NKA20 H1S-H F3-BC110WTF	212179
1600A	NKA20 H1S-H F3-BC220TF	212180
1600A	NKA20 H1S-H F3-BC220WTF	212181
1600A	NKA20 H1S-W F3-AC220/230/240TF	952372
1600A	NKA20 H1S-W F3-AC220/230/240WTF	952373
1600A	NKA20 H1S-W F3-AC230/240/241.5TF	952383
1600A	NKA20 H1S-W F3-AC230/240/241.5WTF	952384
1600A	NKA20 H1S-W F3-BC110TF	952371
1600A	NKA20 H1S-W F3-BC110WTF	952371
1600A	NKA20 H1S-W F3-BC220TF	952379
1600A	NKA20 H1S-W F3-BC220WTF	952399
1600A	NKA20 H1S-PF3-AC220/230/240TF	212147
1600A	NKA20 H1S-PF3-AC220/230/240WTF	212148
1600A	NKA20 H1S-PF3-AC230/240/241.5TF	212149
1600A	NKA20 H1S-PF3-AC230/240/241.5WTF	212150
1600A	NKA20 H1S-PF3-BC110TF	212147
1600A	NKA20 H1S-PF3-BC110WTF	212148
1600A	NKA20 H1S-PF3-BC220TF	212149
1600A	NKA20 H1S-PF3-BC220WTF	212150
2000A	NKA20 H20-AF3-AC220/230/240TF	952379
2000A	NKA20 H20-AF3-AC220/230/240WTF	952379
2000A	NKA20 H20-AF3-AC230/240/241.5TF	952387
2000A	NKA20 H20-AF3-AC230/240/241.5WTF	952387
2000A	NKA20 H20-AF3-BC110TF	952373
2000A	NKA20 H20-AF3-BC110WTF	952373
2000A	NKA20 H20-AF3-BC220TF	952373
2000A	NKA20 H20-AF3-BC220WTF	952383
2000A	NKA20 H20-H F3-AC220/230/240TF	212208
2000A	NKA20 H20-H F3-AC220/230/240WTF	212209
2000A	NKA20 H20-H F3-AC230/240/241.5TF	212210
2000A	NKA20 H20-H F3-AC230/240/241.5WTF	212211
2000A	NKA20 H20-H F3-BC110TF	212212
2000A	NKA20 H20-H F3-BC110WTF	212213
2000A	NKA20 H20-H F3-BC220TF	212214
2000A	NKA20 H20-H F3-BC220WTF	212215
2000A	NKA20 H20-AF3-AC220/230/240TF	952391
2000A	NKA20 H20-AF3-AC220/230/240WTF	952391
2000A	NKA20 H20-AF3-AC230/240/241.5TF	952399
2000A	NKA20 H20-AF3-AC230/240/241.5WTF	952399
2000A	NKA20 H20-AF3-BC110TF	952397
2000A	NKA20 H20-AF3-BC110WTF	952397
2000A	NKA20 H20-AF3-BC220TF	952397
2000A	NKA20 H20-AF3-BC220WTF	952397

NKA-20000 Fixed 4P

Rated Current	Description	Code
3000A	NKA20 H20-WF3-AC220/230/240TF	952382
3000A	NKA20 H20-WF3-AC220/230/240WTF	952382
3000A	NKA20 H20-WF3-AC230/240/241.5TF	952382
3000A	NKA20 H20-WF3-AC230/240/241.5WTF	952382
3000A	NKA20 H20-WF3-BC110TF	952370
3000A	NKA20 H20-WF3-BC110WTF	952370
3000A	NKA20 H20-WF3-BC220TF	952372
3000A	NKA20 H20-WF3-BC220WTF	952372
3000A	NKA20 H20-PF3-AC220/230/240TF	212208
3000A	NKA20 H20-PF3-AC220/230/240WTF	212207
3000A	NKA20 H20-PF3-AC230/240/241.5TF	212208
3000A	NKA20 H20-PF3-AC230/240/241.5WTF	212209
3000A	NKA20 H20-PF3-BC110TF	212210
3000A	NKA20 H20-PF3-BC110WTF	212211
3000A	NKA20 H20-PF3-BC220TF	212212
3000A	NKA20 H20-PF3-BC220WTF	212213
400A	NKA20 H05-AF3-AC220/230/240TF	952387
400A	NKA20 H05-AF3-AC220/230/240WTF	952383
400A	NKA20 H05-AF3-AC230/240/241.5TF	952383
400A	NKA20 H05-AF3-AC230/240/241.5WTF	952383
400A	NKA20 H05-AF3-BC110TF	952382
400A	NKA20 H05-AF3-BC110WTF	952390
400A	NKA20 H05-AF3-BC220TF	952379
400A	NKA20 H05-AF3-BC220WTF	952377
400A	NKA20 H05-H F3-AC220/230/240TF	212207
400A	NKA20 H05-H F3-AC220/230/240WTF	212203
400A	NKA20 H05-H F3-AC230/240/241.5TF	212204
400A	NKA20 H05-H F3-AC230/240/241.5WTF	212205
400A	NKA20 H05-H F3-BC110TF	212206
400A	NKA20 H05-H F3-BC110WTF	212207
400A	NKA20 H05-H F3-BC220TF	212208
400A	NKA20 H05-H F3-BC220WTF	212209
400A	NKA20 H05-WF3-AC220/230/240TF	952391
400A	NKA20 H05-WF3-AC220/230/240WTF	952391
400A	NKA20 H05-WF3-AC230/240/241.5TF	952399
400A	NKA20 H05-WF3-AC230/240/241.5WTF	952399
400A	NKA20 H05-WF3-BC110TF	952397
400A	NKA20 H05-WF3-BC110WTF	952397
400A	NKA20 H05-WF3-BC220TF	952397
400A	NKA20 H05-WF3-BC220WTF	952397

NKA-2000 Fixed 4P

Rated Current	Description	Code
200A	NKA20 H03-FF3-AC220/230/240TF	212270
200A	NKA20 H03-FF3-AC220/230/240WTF	212271
200A	NKA20 H03-FF3-AC280/300/315TF	212272
200A	NKA20 H03-FF3-AC280/300/315WTF	212273
200A	NKA20 H03-FF3-BC110TF	212274
200A	NKA20 H03-FF3-BC110WTF	212275
200A	NKA20 H03-FF3-BC220TF	212276
200A	NKA20 H03-FF3-BC220WTF	212277
300A	NKA20 H03-AF3-AC220/230/240TF	940292
300A	NKA20 H03-AF3-AC220/230/240WTF	940291
300A	NKA20 H03-AF3-AC280/300/315TF	940443
300A	NKA20 H03-AF3-AC280/300/315WTF	940289
300A	NKA20 H03-AF3-BC110TF	940491
300A	NKA20 H03-AF3-BC110WTF	940291
300A	NKA20 H03-AF3-BC220TF	940207
300A	NKA20 H03-AF3-BC220WTF	940205
300A	NKA20 H03-HF3-AC220/230/240TF	212364
300A	NKA20 H03-HF3-AC220/230/240WTF	212367
300A	NKA20 H03-HF3-AC280/300/315TF	212368
300A	NKA20 H03-HF3-AC280/300/315WTF	212369
300A	NKA20 H03-HF3-BC110TF	212370
300A	NKA20 H03-HF3-BC110WTF	212371
300A	NKA20 H03-HF3-BC220TF	212372
300A	NKA20 H03-HF3-BC220WTF	212373
300A	NKA20 H03-WF3-AC220/230/240TF	940299
300A	NKA20 H03-WF3-AC220/230/240WTF	940292
300A	NKA20 H03-WF3-AC280/300/315TF	940447
300A	NKA20 H03-WF3-AC280/300/315WTF	940273
300A	NKA20 H03-WF3-BC110TF	940492
300A	NKA20 H03-WF3-BC110WTF	940291
300A	NKA20 H03-WF3-BC220TF	940201
300A	NKA20 H03-WF3-BC220WTF	940209
300A	NKA20 H03-FF3-AC220/230/240TF	212204
300A	NKA20 H03-FF3-AC220/230/240WTF	212205
300A	NKA20 H03-FF3-AC280/300/315TF	212206
300A	NKA20 H03-FF3-AC280/300/315WTF	212207
300A	NKA20 H03-FF3-BC110TF	212208
300A	NKA20 H03-FF3-BC110WTF	212209
300A	NKA20 H03-FF3-BC220TF	212210
300A	NKA20 H03-FF3-BC220WTF	212211

NKA-2000 Fixed 4P

Rated Current	Description	Code
1000A	NKA20 H10-AF4-AC220/230/240TF	940803
1000A	NKA20 H10-AF4-AC220/230/240WTF	940829
1000A	NKA20 H10-AF4-AC280/300/315TF	940831
1000A	NKA20 H10-AF4-AC280/300/315WTF	940877
1000A	NKA20 H10-AF4-BC110TF	940899
1000A	NKA20 H10-AF4-BC110WTF	940925
1000A	NKA20 H10-AF4-BC220TF	940945
1000A	NKA20 H10-AF4-BC220WTF	940972
1000A	NKA20 H10-HF4-AC220/230/240TF	212420
1000A	NKA20 H10-HF4-AC220/230/240WTF	212421
1000A	NKA20 H10-HF4-AC280/300/315TF	212422
1000A	NKA20 H10-HF4-AC280/300/315WTF	212423
1000A	NKA20 H10-HF4-BC110TF	212424
1000A	NKA20 H10-HF4-BC110WTF	212425
1000A	NKA20 H10-HF4-BC220TF	212426
1000A	NKA20 H10-HF4-BC220WTF	212427
1000A	NKA20 H10-WF4-AC220/230/240TF	940807
1000A	NKA20 H10-WF4-AC220/230/240WTF	940823
1000A	NKA20 H10-WF4-AC280/300/315TF	940855
1000A	NKA20 H10-WF4-AC280/300/315WTF	940881
1000A	NKA20 H10-WF4-BC110TF	940801
1000A	NKA20 H10-WF4-BC110WTF	940929
1000A	NKA20 H10-WF4-BC220TF	940949
1000A	NKA20 H10-WF4-BC220WTF	940977
1000A	NKA20 H10-FF4-AC220/230/240TF	212098
1000A	NKA20 H10-FF4-AC220/230/240WTF	212099
1000A	NKA20 H10-FF4-AC280/300/315TF	212400
1000A	NKA20 H10-FF4-AC280/300/315WTF	212401
1000A	NKA20 H10-FF4-BC110TF	212402
1000A	NKA20 H10-FF4-BC110WTF	212403
1000A	NKA20 H10-FF4-BC220TF	212404
1000A	NKA20 H10-FF4-BC220WTF	212405
1250A	NKA20 H12-AF4-AC220/230/240TF	940811
1250A	NKA20 H12-AF4-AC220/230/240WTF	940837
1250A	NKA20 H12-AF4-AC280/300/315TF	940859
1250A	NKA20 H12-AF4-AC280/300/315WTF	940885
1250A	NKA20 H12-AF4-BC110TF	940805
1250A	NKA20 H12-AF4-BC110WTF	940933
1250A	NKA20 H12-AF4-BC220TF	940953
1250A	NKA20 H12-AF4-BC220WTF	940981

NKA-2000 Fixed 4P

Rated Current	Description	Code
1250A	NKA20 M12-H Fa-AC220/230/240TF	213494
1250A	NKA20 M12-H Fa-AC220/230/240ANTF	213495
1250A	NKA20 M12-H Fa-AC230/400/415TF	213496
1250A	NKA20 M12-H Fa-AC230/400/415ANTF	213497
1250A	NKA20 M12-H Fa-BC110TF	213498
1250A	NKA20 M12-H Fa-BC110ANTF	213499
1250A	NKA20 M12-H Fa-BC220TF	213500
1250A	NKA20 M12-H Fa-BC220ANTF	213501
1250A	NKA20 M12-AH Fa-AC220/230/240TF	940415
1250A	NKA20 M12-AH Fa-AC220/230/240ANTF	940416
1250A	NKA20 M12-AH Fa-AC230/400/415TF	940417
1250A	NKA20 M12-AH Fa-AC230/400/415ANTF	940418
1250A	NKA20 M12-AH Fa-BC110TF	940419
1250A	NKA20 M12-AH Fa-BC110ANTF	940420
1250A	NKA20 M12-AH Fa-BC220TF	940421
1250A	NKA20 M12-AH Fa-BC220ANTF	940422
1250A	NKA20 M12-F Fa-AC220/230/240TF	213482
1250A	NKA20 M12-F Fa-AC220/230/240ANTF	213483
1250A	NKA20 M12-F Fa-AC230/400/415TF	213484
1250A	NKA20 M12-F Fa-AC230/400/415ANTF	213485
1250A	NKA20 M12-F Fa-BC110TF	213486
1250A	NKA20 M12-F Fa-BC110ANTF	213487
1250A	NKA20 M12-F Fa-BC220TF	213488
1250A	NKA20 M12-F Fa-BC220ANTF	213489
1600A	NKA20 M16-A Fa-AC220/230/240TF	940419
1600A	NKA20 M16-A Fa-AC220/230/240ANTF	940423
1600A	NKA20 M16-A Fa-AC230/400/415TF	940424
1600A	NKA20 M16-A Fa-AC230/400/415ANTF	940425
1600A	NKA20 M16-A Fa-BC110TF	940426
1600A	NKA20 M16-A Fa-BC110ANTF	940427
1600A	NKA20 M16-A Fa-BC220TF	940428
1600A	NKA20 M16-A Fa-BC220ANTF	940429
1600A	NKA20 M16-H Fa-AC220/230/240TF	213488
1600A	NKA20 M16-H Fa-AC220/230/240ANTF	213489
1600A	NKA20 M16-H Fa-AC230/400/415TF	213490
1600A	NKA20 M16-H Fa-AC230/400/415ANTF	213491
1600A	NKA20 M16-H Fa-BC110TF	213492
1600A	NKA20 M16-H Fa-BC110ANTF	213493
1600A	NKA20 M16-H Fa-BC220TF	213494
1600A	NKA20 M16-H Fa-BC220ANTF	213495

NKA-2000 Fixed 4P

Rated Current	Description	Code
1600A	NKA20 M16-AH Fa-AC220/230/240TF	940423
1600A	NKA20 M16-AH Fa-AC220/230/240ANTF	940424
1600A	NKA20 M16-AH Fa-AC230/400/415TF	940425
1600A	NKA20 M16-AH Fa-AC230/400/415ANTF	940426
1600A	NKA20 M16-AH Fa-BC110TF	940427
1600A	NKA20 M16-AH Fa-BC110ANTF	940428
1600A	NKA20 M16-AH Fa-BC220TF	940429
1600A	NKA20 M16-AH Fa-BC220ANTF	940430
1600A	NKA20 M16-FFa-AC220/230/240TF	213458
1600A	NKA20 M16-FFa-AC220/230/240ANTF	213459
1600A	NKA20 M16-FFa-AC230/400/415TF	213458
1600A	NKA20 M16-FFa-AC230/400/415ANTF	213459
1600A	NKA20 M16-FFa-BC110TF	213460
1600A	NKA20 M16-FFa-BC110ANTF	213461
1600A	NKA20 M16-FFa-BC220TF	213462
1600A	NKA20 M16-FFa-BC220ANTF	213463
2000A	NKA20 M20-A Fa-AC220/230/240TF	940427
2000A	NKA20 M20-A Fa-AC220/230/240ANTF	940431
2000A	NKA20 M20-A Fa-AC230/400/415TF	940432
2000A	NKA20 M20-A Fa-AC230/400/415ANTF	940433
2000A	NKA20 M20-A Fa-BC110TF	940434
2000A	NKA20 M20-A Fa-BC110ANTF	940435
2000A	NKA20 M20-A Fa-BC220TF	940436
2000A	NKA20 M20-A Fa-BC220ANTF	940437
2000A	NKA20 M20-H Fa-AC220/230/240TF	213457
2000A	NKA20 M20-H Fa-AC220/230/240ANTF	213458
2000A	NKA20 M20-H Fa-AC230/400/415TF	213459
2000A	NKA20 M20-H Fa-AC230/400/415ANTF	213460
2000A	NKA20 M20-H Fa-BC110TF	213461
2000A	NKA20 M20-H Fa-BC110ANTF	213462
2000A	NKA20 M20-H Fa-BC220TF	213463
2000A	NKA20 M20-H Fa-BC220ANTF	213464
2000A	NKA20 M20-AH Fa-AC220/230/240TF	940431
2000A	NKA20 M20-AH Fa-AC220/230/240ANTF	940432
2000A	NKA20 M20-AH Fa-AC230/400/415TF	940433
2000A	NKA20 M20-AH Fa-AC230/400/415ANTF	940434
2000A	NKA20 M20-AH Fa-BC110TF	940435
2000A	NKA20 M20-AH Fa-BC110ANTF	940436
2000A	NKA20 M20-AH Fa-BC220TF	940437
2000A	NKA20 M20-AH Fa-BC220ANTF	940438

NKA-2000 Fixed 4P

Rated Current	Description	Code
2000A	NKA20 H20-FF4-AC220/220/240TF	214820
2000A	NKA20 H20-FF4-AC220/220/240WTF	214821
2000A	NKA20 H20-FF4-AC280/400/415TF	214822
2000A	NKA20 H20-FF4-AC280/400/415WTF	214823
2000A	NKA20 H20-FF4-BC110TF	214824
2000A	NKA20 H20-FF4-BC110WTF	214825
2000A	NKA20 H20-FF4-BC220TF	214826
2000A	NKA20 H20-FF4-BC220WTF	214827
200A	NKA20 S08-AF4-AC220/220/240TF	108470
200A	NKA20 S08-AF4-AC220/220/240WTF	192347
200A	NKA20 S08-AF4-AC280/400/415TF	108518
200A	NKA20 S08-AF4-AC280/400/415WTF	192390
200A	NKA20 S08-HF4-AC220/220/240TF	214888
200A	NKA20 S08-HF4-AC220/220/240WTF	214889
200A	NKA20 S08-HF4-AC280/400/415TF	214890
200A	NKA20 S08-HF4-AC280/400/415WTF	214891
200A	NKA20 S08-WF4-AC220/220/240TF	108474
200A	NKA20 S08-WF4-AC220/220/240WTF	192348
200A	NKA20 S08-WF4-AC280/400/415TF	108522
200A	NKA20 S08-WF4-AC280/400/415WTF	192394
200A	NKA20 S08-FF4-AC220/220/240TF	214872
200A	NKA20 S08-FF4-AC220/220/240WTF	214873
200A	NKA20 S08-FF4-AC280/400/415TF	214874
200A	NKA20 S08-FF4-AC280/400/415WTF	214875
200A	NKA20 S08-AF4-AC220/220/240TF	108478
200A	NKA20 S08-AF4-AC220/220/240WTF	192350
200A	NKA20 S08-AF4-AC280/400/415TF	108526
200A	NKA20 S08-AF4-AC280/400/415WTF	192398
200A	NKA20 S08-HF4-AC220/220/240TF	214720
200A	NKA20 S08-HF4-AC220/220/240WTF	214721
200A	NKA20 S08-HF4-AC280/400/415TF	214722
200A	NKA20 S08-HF4-AC280/400/415WTF	214723
200A	NKA20 S08-WF4-AC220/220/240TF	108482
200A	NKA20 S08-WF4-AC220/220/240WTF	192354
200A	NKA20 S08-WF4-AC280/400/415TF	108530
200A	NKA20 S08-WF4-AC280/400/415WTF	192402
200A	NKA20 S08-FF4-AC220/220/240TF	214704
200A	NKA20 S08-FF4-AC220/220/240WTF	214705
200A	NKA20 S08-FF4-AC280/400/415TF	214706
200A	NKA20 S08-FF4-AC280/400/415WTF	214707

NKA-2000 Fixed 4P

1000A	NKA20 S10-AF4-AC220/220/240TF	108484
1000A	NKA20 S10-AF4-AC220/220/240WTF	192358
1000A	NKA20 S10-AF4-AC280/400/415TF	108504
1000A	NKA20 S10-AF4-AC280/400/415WTF	192404
1000A	NKA20 S10-HF4-AC220/220/240TF	214732
1000A	NKA20 S10-HF4-AC220/220/240WTF	214733
1000A	NKA20 S10-HF4-AC280/400/415TF	214734
1000A	NKA20 S10-HF4-AC280/400/415WTF	214735
1000A	NKA20 S10-WF4-AC220/220/240TF	108490
1000A	NKA20 S10-WF4-AC220/220/240WTF	192362
1000A	NKA20 S10-WF4-AC280/400/415TF	108508
1000A	NKA20 S10-WF4-AC280/400/415WTF	192410
1000A	NKA20 S10-FF4-AC220/220/240TF	214736
1000A	NKA20 S10-FF4-AC220/220/240WTF	214737
1000A	NKA20 S10-FF4-AC280/400/415TF	214738
1000A	NKA20 S10-FF4-AC280/400/415WTF	214739
1250A	NKA20 S12-AF4-AC220/220/240TF	108494
1250A	NKA20 S12-AF4-AC220/220/240WTF	192366
1250A	NKA20 S12-AF4-AC280/400/415TF	108512
1250A	NKA20 S12-AF4-AC280/400/415WTF	192414
1250A	NKA20 S12-HF4-AC220/220/240TF	214784
1250A	NKA20 S12-HF4-AC220/220/240WTF	214785
1250A	NKA20 S12-HF4-AC280/400/415TF	214786
1250A	NKA20 S12-HF4-AC280/400/415WTF	214787
1250A	NKA20 S12-WF4-AC220/220/240TF	108498
1250A	NKA20 S12-WF4-AC220/220/240WTF	192370
1250A	NKA20 S12-WF4-AC280/400/415TF	108516
1250A	NKA20 S12-WF4-AC280/400/415WTF	192418
1250A	NKA20 S12-FF4-AC220/220/240TF	214788
1250A	NKA20 S12-FF4-AC220/220/240WTF	214789
1250A	NKA20 S12-FF4-AC280/400/415TF	214790
1250A	NKA20 S12-FF4-AC280/400/415WTF	214791
1600A	NKA20 S16-AF4-AC220/220/240TF	108502
1600A	NKA20 S16-AF4-AC220/220/240WTF	192374
1600A	NKA20 S16-AF4-AC280/400/415TF	108520
1600A	NKA20 S16-AF4-AC280/400/415WTF	192422
1600A	NKA20 S16-HF4-AC220/220/240TF	214816
1600A	NKA20 S16-HF4-AC220/220/240WTF	214817
1600A	NKA20 S16-HF4-AC280/400/415TF	214818
1600A	NKA20 S16-HF4-AC280/400/415WTF	214819

NKA-20000 Fixed 4P

Rated Current	Description	Code
1600A	NKA20S16-ANF3-AC220/230/240TF	108306
1600A	NKA20S16-ANF3-AC220/230/240ATF	108308
1600A	NKA20S16-ANF3-AC220/230/240/415TF	108334
1600A	NKA20S16-ANF3-AC220/230/240ATF	108426
1600A	NKA20S16-FF4-AC220/230/240TF	214800
1600A	NKA20S16-FF4-AC220/230/240ATF	214801
1600A	NKA20S16-FF4-AC220/230/240/415TF	214802
1600A	NKA20S16-FF4-AC220/230/240/415ATF	214803
2000A	NKA20S20-AP4-AC220/230/240TF	108310
2000A	NKA20S20-AP4-AC220/230/240ATF	108382
2000A	NKA20S20-AP4-AC220/230/240/415TF	108338
2000A	NKA20S20-AP4-AC220/230/240/415ATF	108428
2000A	NKA20S20-HF4-AC220/230/240TF	214838
2000A	NKA20S20-HF4-AC220/230/240ATF	214840
2000A	NKA20S20-HF4-AC220/230/240/415TF	214850
2000A	NKA20S20-HF4-AC220/230/240/415ATF	214851
2000A	NKA20S20-ANF4-AC220/230/240TF	108314
2000A	NKA20S20-ANF4-AC220/230/240ATF	108386
2000A	NKA20S20-ANF4-AC220/230/240/415TF	108342
2000A	NKA20S20-ANF4-AC220/230/240/415ATF	108424
2000A	NKA20S20-FF4-AC220/230/240TF	214822
2000A	NKA20S20-FF4-AC220/230/240ATF	214823
2000A	NKA20S20-FF4-AC220/230/240/415TF	214834
2000A	NKA20S20-FF4-AC220/230/240/415ATF	214835

NKA-20000 Withdrawable 3P

Rated Current	Description	Code
200A	NKA20HD3-AB3-AC220/230/240TF	930338
200A	NKA20HD3-AB3-AC220/230/240/415ATF	216172
200A	NKA20HD3-AB3-AC220/230/240ATF	930728
200A	NKA20HD3-AB3-AC220/230/240/415ATF	216166
200A	NKA20HD3-AB3-AC220/230/240/415TF	930334
200A	NKA20HD3-AB3-AC220/230/240/415ATF	930724
200A	NKA20HD3-AB3-BC110TF	930832
200A	NKA20HD3-AB3-BC110ATF	930816
200A	NKA20HD3-AB3-BC230TF	930830
200A	NKA20HD3-AB3-BC230ATF	930836
200A	NKA20HD3-HB3-AC220/230/240TF	211890
200A	NKA20HD3-HB3-AC220/230/240ATF	211891
200A	NKA20HD3-HB3-AC220/230/240/415TF	211892
200A	NKA20HD3-HB3-AC220/230/240/415ATF	211893
200A	NKA20HD3-HB3-BC110TF	211894
200A	NKA20HD3-HB3-BC110ATF	211895
200A	NKA20HD3-HB3-BC230TF	211896
200A	NKA20HD3-HB3-BC230ATF	211897
200A	NKA20HD3-AB3-AC220/230/240TF	930340
200A	NKA20HD3-AB3-AC220/230/240/415ATF	215914
200A	NKA20HD3-AB3-AC220/230/240ATF	930732
200A	NKA20HD3-AB3-AC220/230/240/415ATF	215913
200A	NKA20HD3-AB3-AC220/230/240/415TF	930338
200A	NKA20HD3-AB3-AC220/230/240/415ATF	930730
200A	NKA20HD3-AB3-BC110TF	930838
200A	NKA20HD3-AB3-BC110ATF	930814
200A	NKA20HD3-AB3-BC230TF	930834
200A	NKA20HD3-AB3-BC230ATF	930834
200A	NKA20HD3-PB3-AC220/230/240TF	211858
200A	NKA20HD3-PB3-AC220/230/240ATF	211859
200A	NKA20HD3-PB3-AC220/230/240/415TF	211860
200A	NKA20HD3-PB3-AC220/230/240/415ATF	211861
200A	NKA20HD3-PB3-BC110TF	211862
200A	NKA20HD3-PB3-BC110ATF	211863
200A	NKA20HD3-PB3-BC230TF	211864
200A	NKA20HD3-PB3-BC230ATF	211865
200A	NKA20HD3-AB3-AC220/230/240TF	930344
200A	NKA20HD3-AB3-AC220/230/240/415ATF	216170
200A	NKA20HD3-AB3-AC220/230/240ATF	930736
200A	NKA20HD3-AB3-AC220/230/240/415ATF	216167
200A	NKA20HD3-AB3-AC220/230/240/415TF	930392

NKA-2000 Withdrawable 3P

Rated Current	Description	Code
300A	NKA20H00-AB3-AC230/400/51.5WTF	930784
300A	NKA20H00-AB3-BC110TF	930840
300A	NKA20H00-AB3-BC110WTF	930820
300A	NKA20H00-AB3-BC220TF	930888
300A	NKA20H00-AB3-BC220WTF	930868
300A	NKA20H00-H03-AC230/230/340TF	211954
300A	NKA20H00-H03-AC230/230/340WTF	211955
300A	NKA20H00-H03-AC230/300/41.5TF	211956
300A	NKA20H00-H03-AC230/400/41.5WTF	211957
300A	NKA20H00-H03-BC110TF	211958
300A	NKA20H00-H03-BC110WTF	211959
300A	NKA20H00-H03-BC220TF	211960
300A	NKA20H00-H03-BC220WTF	211961
300A	NKA20H00-AB3-AC230/230/340TF	930548
300A	NKA20H00-AB3-AC230/230/340-3P1WTF	215916
300A	NKA20H00-AB3-AC230/230/340WTF	930740
300A	NKA20H00-AB3-AC230/230/340W-3P1WTF	215917
300A	NKA20H00-AB3-AC230/300/41.5TF	930598
300A	NKA20H00-AB3-AC230/400/41.5WTF	930788
300A	NKA20H00-AB3-BC110TF	930644
300A	NKA20H00-AB3-BC110WTF	930824
300A	NKA20H00-AB3-BC220TF	930692
300A	NKA20H00-AB3-BC220WTF	930772
300A	NKA20H00-F03-AC230/230/340TF	211923
300A	NKA20H00-F03-AC230/230/340WTF	211923
300A	NKA20H00-F03-AC230/300/41.5TF	211924
300A	NKA20H00-F03-AC230/400/41.5WTF	211925
300A	NKA20H00-F03-BC110TF	211926
300A	NKA20H00-F03-BC110WTF	211927
300A	NKA20H00-F03-BC220TF	211928
300A	NKA20H00-F03-BC220WTF	211929
1000A	NKA20H10-AB3-AC230/230/340TF	930552
1000A	NKA20H10-AB3-AC230/230/340-3P1WTF	216174
1000A	NKA20H10-AB3-AC230/230/340WTF	930744
1000A	NKA20H10-AB3-AC230/230/340W-3P1WTF	216188
1000A	NKA20H10-AB3-AC230/300/41.5TF	930800
1000A	NKA20H10-AB3-AC230/400/41.5WTF	930792
1000A	NKA20H10-AB3-BC110TF	930838
1000A	NKA20H10-AB3-BC110WTF	930828
1000A	NKA20H10-AB3-BC220TF	930896
1000A	NKA20H10-AB3-BC220WTF	930776

NKA-2000 Withdrawable 3P

Rated Current	Description	Code
1000A	NKA20H10-HB3-AC230/230/340TF	212022
1000A	NKA20H10-HB3-AC230/230/340WTF	212023
1000A	NKA20H10-HB3-AC230/300/41.5TF	212024
1000A	NKA20H10-HB3-AC230/400/41.5WTF	212025
1000A	NKA20H10-HB3-BC110TF	212026
1000A	NKA20H10-HB3-BC110WTF	212027
1000A	NKA20H10-HB3-BC220TF	212028
1000A	NKA20H10-HB3-BC220WTF	212029
1000A	NKA20H10-AB3-AC230/230/340TF	930554
1000A	NKA20H10-AB3-AC230/230/340-3P1WTF	215918
1000A	NKA20H10-AB3-AC230/230/340WTF	930748
1000A	NKA20H10-AB3-AC230/230/340W-3P1WTF	215919
1000A	NKA20H10-AB3-AC230/300/41.5TF	930804
1000A	NKA20H10-AB3-AC230/400/41.5WTF	930794
1000A	NKA20H10-AB3-BC110TF	930832
1000A	NKA20H10-AB3-BC110WTF	930832
1000A	NKA20H10-AB3-BC220TF	930700
1000A	NKA20H10-AB3-BC220WTF	930820
1000A	NKA20H10-FB3-AC230/230/340TF	211936
1000A	NKA20H10-FB3-AC230/230/340WTF	211937
1000A	NKA20H10-FB3-AC230/300/41.5TF	211938
1000A	NKA20H10-FB3-AC230/400/41.5WTF	211939
1000A	NKA20H10-FB3-BC110TF	211940
1000A	NKA20H10-FB3-BC110WTF	211941
1000A	NKA20H10-FB3-BC220TF	211942
1000A	NKA20H10-FB3-BC220WTF	211943
1250A	NKA20H12-AB3-AC230/230/340TF	930560
1250A	NKA20H12-AB3-AC230/230/340-3P1WTF	216175
1250A	NKA20H12-AB3-AC230/230/340WTF	930752
1250A	NKA20H12-AB3-AC230/230/340W-3P1WTF	216189
1250A	NKA20H12-AB3-AC230/300/41.5TF	930808
1250A	NKA20H12-AB3-AC230/400/41.5WTF	930800
1250A	NKA20H12-AB3-BC110TF	930856
1250A	NKA20H12-AB3-BC110WTF	930856
1250A	NKA20H12-AB3-BC220TF	930704
1250A	NKA20H12-AB3-BC220WTF	930864
1250A	NKA20H12-HB3-AC230/230/340TF	212036
1250A	NKA20H12-HB3-AC230/230/340WTF	212037
1250A	NKA20H12-HB3-AC230/300/41.5TF	212038
1250A	NKA20H12-HB3-AC230/400/41.5WTF	212039
1250A	NKA20H12-HB3-BC110TF	212040

NKA-2000 Withdrawable 3P

Rated Current	Description	Code
1250A	NKA20H12-HB3-BC110ATP	212091
1250A	NKA20H12-HB3-BC220TF	212092
1250A	NKA20H12-HB3-BC220ATP	212093
1250A	NKA20H12-AB3-AC220/230/240TF	932094
1250A	NKA20H12-AB3-AC220/230/240-3P1HTP	212095
1250A	NKA20H12-AB3-AC220/230/240ATP	932096
1250A	NKA20H12-AB3-AC220/230/240A-3P1HTP	212097
1250A	NKA20H12-AB3-AC230/400/415TF	932098
1250A	NKA20H12-AB3-AC230/400/415ATP	932099
1250A	NKA20H12-AB3-BC110TF	932100
1250A	NKA20H12-AB3-BC110ATP	932101
1250A	NKA20H12-AB3-BC220TF	932102
1250A	NKA20H12-AB3-BC220ATP	932103
1250A	NKA20H12-FB3-AC220/230/240TF	212054
1250A	NKA20H12-FB3-AC220/230/240ATP	212055
1250A	NKA20H12-FB3-AC220/230/240A-3P1HTP	212056
1250A	NKA20H12-FB3-AC230/400/415TF	212057
1250A	NKA20H12-FB3-BC110TF	212058
1250A	NKA20H12-FB3-BC110ATP	212059
1250A	NKA20H12-FB3-BC220TF	212060
1250A	NKA20H12-FB3-BC220ATP	212061
1600A	NKA20H16-AB3-AC220/230/240TF	932160
1600A	NKA20H16-AB3-AC220/230/240-3P1HTP	212161
1600A	NKA20H16-AB3-AC220/230/240ATP	932162
1600A	NKA20H16-AB3-AC220/230/240A-3P1HTP	212163
1600A	NKA20H16-AB3-AC230/400/415TF	932164
1600A	NKA20H16-AB3-AC230/400/415ATP	932165
1600A	NKA20H16-AB3-BC110TF	932166
1600A	NKA20H16-AB3-BC110ATP	932167
1600A	NKA20H16-AB3-BC220TF	932168
1600A	NKA20H16-AB3-BC220ATP	932169
1600A	NKA20H16-HB3-AC220/230/240TF	212130
1600A	NKA20H16-HB3-AC220/230/240ATP	212131
1600A	NKA20H16-HB3-AC230/400/415TF	212132
1600A	NKA20H16-HB3-AC230/400/415ATP	212133
1600A	NKA20H16-HB3-BC110TF	212134
1600A	NKA20H16-HB3-BC110ATP	212135
1600A	NKA20H16-HB3-BC220TF	212136
1600A	NKA20H16-HB3-BC220ATP	212137
1600A	NKA20H16-AB3-AC220/230/240TF	932172

NKA-2000 Withdrawable 3P

Rated Current	Description	Code
1600A	NKA20H16-AB3-AC220/230/240-3P1HTP	212072
1600A	NKA20H16-AB3-AC220/230/240ATP	932073
1600A	NKA20H16-AB3-AC220/230/240A-3P1HTP	212074
1600A	NKA20H16-AB3-AC230/400/415TF	932075
1600A	NKA20H16-AB3-AC230/400/415ATP	932076
1600A	NKA20H16-AB3-BC110TF	932077
1600A	NKA20H16-AB3-BC110ATP	932078
1600A	NKA20H16-AB3-BC220TF	932079
1600A	NKA20H16-AB3-BC220ATP	932080
1600A	NKA20H16-FB3-AC220/230/240TF	212118
1600A	NKA20H16-FB3-AC220/230/240ATP	212119
1600A	NKA20H16-FB3-AC230/400/415TF	212120
1600A	NKA20H16-FB3-AC230/400/415ATP	212121
1600A	NKA20H16-FB3-BC110TF	212122
1600A	NKA20H16-FB3-BC110ATP	212123
1600A	NKA20H16-FB3-BC220TF	212124
1600A	NKA20H16-FB3-BC220ATP	212125
2000A	NKA20H20-AB3-AC220/230/240TF	932178
2000A	NKA20H20-AB3-AC220/230/240-3P1HTP	212179
2000A	NKA20H20-AB3-AC220/230/240ATP	932180
2000A	NKA20H20-AB3-AC220/230/240A-3P1HTP	212181
2000A	NKA20H20-AB3-AC230/400/415TF	932182
2000A	NKA20H20-AB3-AC230/400/415ATP	932183
2000A	NKA20H20-AB3-BC110TF	932184
2000A	NKA20H20-AB3-BC110ATP	932185
2000A	NKA20H20-AB3-BC220TF	932186
2000A	NKA20H20-AB3-BC220ATP	932187
2000A	NKA20H20-HB3-AC220/230/240TF	212214
2000A	NKA20H20-HB3-AC220/230/240ATP	212215
2000A	NKA20H20-HB3-AC230/400/415TF	212216
2000A	NKA20H20-HB3-AC230/400/415ATP	212217
2000A	NKA20H20-HB3-BC110TF	212218
2000A	NKA20H20-HB3-BC110ATP	212219
2000A	NKA20H20-HB3-BC220TF	212220
2000A	NKA20H20-HB3-BC220ATP	212221
2000A	NKA20H20-AB3-AC220/230/240TF	932300
2000A	NKA20H20-AB3-AC220/230/240-3P1HTP	212024
2000A	NKA20H20-AB3-AC220/230/240ATP	932172
2000A	NKA20H20-AB3-AC220/230/240A-3P1HTP	212025
2000A	NKA20H20-AB3-AC230/400/415TF	932301
2000A	NKA20H20-AB3-AC230/400/415ATP	932008

NKA-2000 Withdrawable 3P

Rated Current	Description	Code
3000A	NKA20H20-AB3-BC110TF	932878
3000A	NKA20H20-AB3-BC110ANTF	934038
3000A	NKA20H20-AB3-BC220TF	932724
3000A	NKA20H20-AB3-BC220ANTF	937103
3000A	NKA20H20-PB3-AC220/230/240TF	212182
3000A	NKA20H20-PB3-AC220/230/240ANTF	212183
3000A	NKA20H20-PB3-AC220/240/415TF	212184
3000A	NKA20H20-PB3-AC220/240/415ANTF	212185
3000A	NKA20H20-PB3-BC110TF	212186
3000A	NKA20H20-PB3-BC110ANTF	212187
3000A	NKA20H20-PB3-BC220TF	212188
3000A	NKA20H20-PB3-BC220ANTF	212189
300A	NKA20H03-AB3-AC220/230/240TF	940034
300A	NKA20H03-AB3-AC220/230/240ANTF	942810
300A	NKA20H03-AB3-AC220/240/415TF	940432
300A	NKA20H03-AB3-AC220/240/415ANTF	942838
300A	NKA20H03-AB3-BC110TF	940430
300A	NKA20H03-AB3-BC110ANTF	942908
300A	NKA20H03-AB3-BC220TF	942036
300A	NKA20H03-AB3-BC220ANTF	942934
300A	NKA20H03-HB3-AC220/230/240TF	212278
300A	NKA20H03-HB3-AC220/230/240ANTF	212279
300A	NKA20H03-HB3-AC220/240/415TF	212280
300A	NKA20H03-HB3-AC220/240/415ANTF	212281
300A	NKA20H03-HB3-BC110TF	212282
300A	NKA20H03-HB3-BC110ANTF	212283
300A	NKA20H03-HB3-BC220TF	212284
300A	NKA20H03-HB3-BC220ANTF	212285
300A	NKA20H03-AB3-AC220/230/240TF	940038
300A	NKA20H03-AB3-AC220/230/240-3P1HTF	212926
300A	NKA20H03-AB3-AC220/230/240ANTF	942814
300A	NKA20H03-AB3-AC220/230/240A-3P1HTF	212927
300A	NKA20H03-AB3-AC220/240/415TF	940436
300A	NKA20H03-AB3-AC220/240/415ANTF	942842
300A	NKA20H03-AB3-BC110TF	940434
300A	NKA20H03-AB3-BC110ANTF	942910
300A	NKA20H03-AB3-BC220TF	942038
300A	NKA20H03-AB3-BC220ANTF	942938
300A	NKA20H03-PB3-AC220/230/240TF	212246
300A	NKA20H03-PB3-AC220/230/240ANTF	212247
300A	NKA20H03-PB3-AC220/240/415TF	212248

NKA-2000 Withdrawable 3P

Rated Current	Description	Code
300A	NKA20H03-PB3-AC220/240/415ANTF	212249
300A	NKA20H03-PB3-BC110TF	212250
300A	NKA20H03-PB3-BC110ANTF	212251
300A	NKA20H03-PB3-BC220TF	212252
300A	NKA20H03-PB3-BC220ANTF	212253
300A	NKA20H03-AB3-AC220/230/240TF	940032
300A	NKA20H03-AB3-AC220/230/240ANTF	942812
300A	NKA20H03-AB3-AC220/240/415TF	940430
300A	NKA20H03-AB3-AC220/240/415ANTF	942836
300A	NKA20H03-AB3-BC110TF	940432
300A	NKA20H03-AB3-BC110ANTF	942914
300A	NKA20H03-AB3-BC220TF	942034
300A	NKA20H03-AB3-BC220ANTF	942932
300A	NKA20H03-HB3-AC220/230/240TF	212242
300A	NKA20H03-HB3-AC220/230/240ANTF	212243
300A	NKA20H03-HB3-AC220/240/415TF	212244
300A	NKA20H03-HB3-AC220/240/415ANTF	212245
300A	NKA20H03-HB3-BC110TF	212246
300A	NKA20H03-HB3-BC110ANTF	212247
300A	NKA20H03-HB3-BC220TF	212248
300A	NKA20H03-HB3-BC220ANTF	212249
300A	NKA20H03-AB3-AC220/230/240TF	940036
300A	NKA20H03-AB3-AC220/230/240-3P1HTF	212928
300A	NKA20H03-AB3-AC220/230/240ANTF	942822
300A	NKA20H03-AB3-AC220/230/240A-3P1HTF	212929
300A	NKA20H03-AB3-AC220/240/415TF	940434
300A	NKA20H03-AB3-AC220/240/415ANTF	942840
300A	NKA20H03-AB3-BC110TF	940432
300A	NKA20H03-AB3-BC110ANTF	942912
300A	NKA20H03-AB3-BC220TF	942036
300A	NKA20H03-AB3-BC220ANTF	942936
300A	NKA20H03-PB3-AC220/230/240TF	212210
300A	NKA20H03-PB3-AC220/230/240ANTF	212211
300A	NKA20H03-PB3-AC220/240/415TF	212212
300A	NKA20H03-PB3-AC220/240/415ANTF	212213
300A	NKA20H03-PB3-BC110TF	212214
300A	NKA20H03-PB3-BC110ANTF	212215
300A	NKA20H03-PB3-BC220TF	212216
300A	NKA20H03-PB3-BC220ANTF	212217
1000A	NKA20H10-AB3-AC220/230/240TF	940400
1000A	NKA20H10-AB3-AC220/230/240ANTF	942826

NKA-2000 Withdrawable 3P

Rated Current	Description	Code
1000A	NKA20 H10-A00-AC220/400/51.5TF	940443
1000A	NKA20 H10-A00-AC220/400/51.5ATF	942974
1000A	NKA20 H10-A00-BC110TF	940493
1000A	NKA20 H10-A00-BC110ATF	942992
1000A	NKA20 H10-A00-BC220TF	942042
1000A	NKA20 H10-A00-BC220ATF	942970
1000A	NKA20 H10-H03-AC220/230/240TF	212404
1000A	NKA20 H10-H03-AC220/230/240ATF	212407
1000A	NKA20 H10-H03-AC220/400/51.5TF	212408
1000A	NKA20 H10-H03-AC220/400/51.5ATF	212409
1000A	NKA20 H10-H03-BC110TF	212410
1000A	NKA20 H10-H03-BC110ATF	212411
1000A	NKA20 H10-H03-BC220TF	212412
1000A	NKA20 H10-H03-BC220ATF	212413
1000A	NKA20 H10-W03-AC220/230/240TF	940404
1000A	NKA20 H10-W03-AC220/230/240-3P1HTF	212920
1000A	NKA20 H10-W03-AC220/230/240ATF	942920
1000A	NKA20 H10-W03-AC220/230/240A-3P1HTF	212921
1000A	NKA20 H10-W03-AC220/400/51.5TF	940452
1000A	NKA20 H10-W03-AC220/400/51.5ATF	942978
1000A	NKA20 H10-W03-BC110TF	940500
1000A	NKA20 H10-W03-BC110ATF	942928
1000A	NKA20 H10-W03-BC220TF	942044
1000A	NKA20 H10-W03-BC220ATF	942974
1000A	NKA20 H10-P03-AC220/230/240TF	212274
1000A	NKA20 H10-P03-AC220/230/240ATF	212275
1000A	NKA20 H10-P03-AC220/400/51.5TF	212276
1000A	NKA20 H10-P03-AC220/400/51.5ATF	212277
1000A	NKA20 H10-P03-BC110TF	212278
1000A	NKA20 H10-P03-BC110ATF	212279
1000A	NKA20 H10-P03-BC220TF	212280
1000A	NKA20 H10-P03-BC220ATF	212281
1250A	NKA20 H12-A00-AC220/230/240TF	940408
1250A	NKA20 H12-A00-AC220/230/240ATF	942984
1250A	NKA20 H12-A00-AC220/400/51.5TF	940454
1250A	NKA20 H12-A00-AC220/400/51.5ATF	942982
1250A	NKA20 H12-A00-BC110TF	942002
1250A	NKA20 H12-A00-BC110ATF	942990
1250A	NKA20 H12-A00-BC220TF	942050
1250A	NKA20 H12-A00-BC220ATF	942986
1250A	NKA20 H12-H03-AC220/230/240TF	212454
1250A	NKA20 H12-H03-AC220/230/240ATF	212455
1250A	NKA20 H12-H03-AC220/400/51.5TF	212456
1250A	NKA20 H12-H03-AC220/400/51.5ATF	212457
1250A	NKA20 H12-H03-BC110TF	212458
1250A	NKA20 H12-H03-BC110ATF	212459
1250A	NKA20 H12-H03-BC220TF	212460
1250A	NKA20 H12-H03-BC220ATF	212461

NKA-2000 Withdrawable 3P

Rated Current	Description	Code
1250A	NKA20 H12-H03-AC220/230/240ATF	212462
1250A	NKA20 H12-H03-AC220/400/51.5TF	212463
1250A	NKA20 H12-H03-AC220/400/51.5ATF	212464
1250A	NKA20 H12-H03-BC110TF	212465
1250A	NKA20 H12-H03-BC110ATF	212466
1250A	NKA20 H12-H03-BC220TF	212467
1250A	NKA20 H12-H03-BC220ATF	212468
1250A	NKA20 H12-W03-AC220/230/240TF	940402
1250A	NKA20 H12-W03-AC220/230/240-3P1HTF	212902
1250A	NKA20 H12-W03-AC220/230/240ATF	942926
1250A	NKA20 H12-W03-AC220/230/240A-3P1HTF	212903
1250A	NKA20 H12-W03-AC220/400/51.5TF	940450
1250A	NKA20 H12-W03-AC220/400/51.5ATF	942988
1250A	NKA20 H12-W03-BC110TF	942006
1250A	NKA20 H12-W03-BC110ATF	942934
1250A	NKA20 H12-W03-BC220TF	942054
1250A	NKA20 H12-W03-BC220ATF	942932
1250A	NKA20 H12-P03-AC220/230/240TF	212452
1250A	NKA20 H12-P03-AC220/230/240ATF	212459
1250A	NKA20 H12-P03-AC220/400/51.5TF	212460
1250A	NKA20 H12-P03-AC220/400/51.5ATF	212461
1250A	NKA20 H12-P03-BC110TF	212462
1250A	NKA20 H12-P03-BC110ATF	212463
1250A	NKA20 H12-P03-BC220TF	212464
1250A	NKA20 H12-P03-BC220ATF	212465
1600A	NKA20 H16-A03-AC220/230/240TF	940416
1600A	NKA20 H16-A03-AC220/230/240ATF	942942
1600A	NKA20 H16-A03-AC220/400/51.5TF	940464
1600A	NKA20 H16-A03-AC220/400/51.5ATF	942996
1600A	NKA20 H16-A03-BC110TF	942010
1600A	NKA20 H16-A03-BC110ATF	942998
1600A	NKA20 H16-A03-BC220TF	942058
1600A	NKA20 H16-A03-BC220ATF	942982
1600A	NKA20 H16-H03-AC220/230/240TF	212454
1600A	NKA20 H16-H03-AC220/230/240ATF	212455
1600A	NKA20 H16-H03-AC220/400/51.5TF	212456
1600A	NKA20 H16-H03-AC220/400/51.5ATF	212457
1600A	NKA20 H16-H03-BC110TF	212458
1600A	NKA20 H16-H03-BC110ATF	212459
1600A	NKA20 H16-H03-BC220TF	212460
1600A	NKA20 H16-H03-BC220ATF	212461

NKA-2000 Withdrawable 3P

Rated Current	Description	Code
1600A	NKA20 H1 S-AN BD-AC220/220/240TF	940420
1600A	NKA20 H1 S-AN BD-AC220/220/240-3P1 NTF	214904
1600A	NKA20 H1 S-AN BD-AC220/220/240WTF	942848
1600A	NKA20 H1 S-AN BD-AC220/220/240W-3P1 NTF	214902
1600A	NKA20 H1 S-AN BD-AC380/400/415TF	940468
1600A	NKA20 H1 S-ANBD-AC380/400/415WTF	942894
1600A	NKA20 H1 S-ANBD-BC110TF	942014
1600A	NKA20 H1 S-ANBD-BC110WTF	942948
1600A	NKA20 H1 S-ANBD-BC220TF	942062
1600A	NKA20 H1 S-ANBD-BC220WTF	942998
1600A	NKA20 H1 S-PBD-AC220/220/240TF	214302
1600A	NKA20 H1 S-PBD-AC220/220/240WTF	214300
1600A	NKA20 H1 S-PBD-AC380/400/415TF	214324
1600A	NKA20 H1 S-PBD-AC380/400/415WTF	214326
1600A	NKA20 H1 S-PBD-BC110TF	214328
1600A	NKA20 H1 S-PBD-BC110WTF	214327
1600A	NKA20 H1 S-PBD-BC220WTF	214329
2000A	NKA20 H20-ABD-AC220/220/240TF	940424
2000A	NKA20 H20-ABD-AC220/220/240WTF	942850
2000A	NKA20 H20-ABD-AC380/400/415TF	940472
2000A	NKA20 H20-ABD-AC380/400/415WTF	942898
2000A	NKA20 H20-ABD-BC110TF	942018
2000A	NKA20 H20-ABD-BC110WTF	942948
2000A	NKA20 H20-ABD-BC220TF	942066
2000A	NKA20 H20-ABD-BC220WTF	942994
2000A	NKA20 H20-H BD-AC220/220/240TF	214328
2000A	NKA20 H20-H BD-AC220/220/240WTF	214329
2000A	NKA20 H20-H BD-AC380/400/415TF	214330
2000A	NKA20 H20-H BD-AC380/400/415WTF	214331
2000A	NKA20 H20-H BD-BC110TF	214332
2000A	NKA20 H20-H BD-BC110WTF	214333
2000A	NKA20 H20-H BD-BC220TF	214334
2000A	NKA20 H20-H BD-BC220WTF	214335
2000A	NKA20 H20-ANBD-AC220/220/240TF	940428
2000A	NKA20 H20-ANBD-AC220/220/240-3P1 NTF	214908
2000A	NKA20 H20-ANBD-AC220/220/240WTF	942854
2000A	NKA20 H20-ANBD-AC220/220/240W-3P1 NTF	214907
2000A	NKA20 H20-ANBD-AC380/400/415TF	940476
2000A	NKA20 H20-ANBD-AC380/400/415WTF	942902
2000A	NKA20 H20-ANBD-BC110TF	942022

NKA-2000 Withdrawable 3P

Rated Current	Description	Code
3000A	NKA20 H20-ANBD-BC110WTF	942950
3000A	NKA20 H20-ANBD-BC220TF	942070
3000A	NKA20 H20-ANBD-BC220WTF	942998
3000A	NKA20 H20-HBD-AC220/220/240TF	214394
3000A	NKA20 H20-HBD-AC220/220/240WTF	214397
3000A	NKA20 H20-HBD-AC380/400/415TF	214398
3000A	NKA20 H20-HBD-AC380/400/415WTF	214399
3000A	NKA20 H20-HBD-BC110TF	214800
3000A	NKA20 H20-HBD-BC110WTF	214801
3000A	NKA20 H20-HBD-BC220TF	214802
3000A	NKA20 H20-HBD-BC220WTF	214803
400A	NKA20 S05-ABD-AC220/220/240TF	100477
400A	NKA20 S05-ABD-AC220/220/240WTF	192029
400A	NKA20 S05-ABD-AC220/220/240TF	100475
400A	NKA20 S05-ABD-AC220/220/240WTF	192031
400A	NKA20 S05-H BD-AC220/220/240TF	214378
400A	NKA20 S05-H BD-AC220/220/240WTF	214377
400A	NKA20 S05-H BD-AC380/400/415TF	214378
400A	NKA20 S05-H BD-AC380/400/415WTF	214379
400A	NKA20 S05-ANBD-AC220/220/240TF	100471
400A	NKA20 S05-ANBD-AC220/220/240-3P1 NTF	214928
400A	NKA20 S05-ANBD-AC220/220/240WTF	192043
400A	NKA20 S05-ANBD-AC220/220/240W-3P1 NTF	214929
400A	NKA20 S05-ANBD-AC380/400/415TF	100479
400A	NKA20 S05-ANBD-AC380/400/415WTF	192091
400A	NKA20 S05-PBD-AC220/220/240TF	214380
400A	NKA20 S05-PBD-AC220/220/240WTF	214381
400A	NKA20 S05-PBD-AC380/400/415TF	214382
400A	NKA20 S05-PBD-AC380/400/415WTF	214383
800A	NKA20 S08-ABD-AC220/220/240TF	100473
800A	NKA20 S08-ABD-AC220/220/240WTF	192047
800A	NKA20 S08-ABD-AC380/400/415TF	100473
800A	NKA20 S08-ABD-AC380/400/415WTF	192093
800A	NKA20 S08-H BD-AC220/220/240TF	214708
800A	NKA20 S08-H BD-AC220/220/240WTF	214709
800A	NKA20 S08-H BD-AC380/400/415TF	214710
800A	NKA20 S08-H BD-AC380/400/415WTF	214711
800A	NKA20 S08-ANBD-AC220/220/240TF	100479
800A	NKA20 S08-ANBD-AC220/220/240-3P1 NTF	214940
800A	NKA20 S08-ANBD-AC220/220/240WTF	192051
800A	NKA20 S08-ANBD-AC220/220/240W-3P1 NTF	214941

NKA-2000 Withdrawable 3P

Rated Current	Description	Code
300A	NKA2000-ANB-AC230/400/41.5TF	103397
300A	NKA2000-ANB-AC230/400/41.5MTF	103399
300A	NKA2000-FB-AC230/230/240TF	214392
300A	NKA2000-FB-AC230/230/240MTF	214393
300A	NKA2000-FB-AC230/400/41.5TF	214394
300A	NKA2000-FB-AC230/400/41.5MTF	214395
1000A	NKA2000-HB-AC230/230/240TF	103402
1000A	NKA2000-HB-AC230/230/240MTF	103403
1000A	NKA2000-HB-AC230/400/41.5TF	103401
1000A	NKA2000-HB-AC230/400/41.5MTF	103403
1000A	NKA2000-HB-AC230/230/240TF	214390
1000A	NKA2000-HB-AC230/230/240MTF	214391
1000A	NKA2000-HB-AC230/400/41.5TF	214392
1000A	NKA2000-HB-AC230/400/41.5MTF	214393
1000A	NKA2000-ANB-AC230/230/240TF	103407
1000A	NKA2000-ANB-AC230/230/240-3FI HTP	213942
1000A	NKA2000-ANB-AC230/230/240MTF	103409
1000A	NKA2000-ANB-AC230/230/240AN-3FI HTP	213943
1000A	NKA2000-ANB-AC230/400/41.5TF	103405
1000A	NKA2000-ANB-AC230/400/41.5MTF	103407
1000A	NKA2000-FB-AC230/230/240TF	214394
1000A	NKA2000-FB-AC230/230/240MTF	214395
1000A	NKA2000-FB-AC230/400/41.5TF	214396
1000A	NKA2000-FB-AC230/400/41.5MTF	214397
1250A	NKA2000-12-AHB-AC230/230/240TF	103409
1250A	NKA2000-12-AHB-AC230/230/240MTF	103410
1250A	NKA2000-12-AHB-AC230/400/41.5TF	103409
1250A	NKA2000-12-AHB-AC230/400/41.5MTF	103411
1250A	NKA2000-12-HB-AC230/230/240TF	214398
1250A	NKA2000-12-HB-AC230/230/240MTF	214399
1250A	NKA2000-12-HB-AC230/400/41.5TF	214398
1250A	NKA2000-12-HB-AC230/400/41.5MTF	214399
1250A	NKA2000-12-ANB-AC230/230/240TF	103413
1250A	NKA2000-12-ANB-AC230/230/240-3FI HTP	213944
1250A	NKA2000-12-ANB-AC230/230/240MTF	103417
1250A	NKA2000-12-ANB-AC230/230/240AN-3FI HTP	213945
1250A	NKA2000-12-ANB-AC230/400/41.5TF	103413
1250A	NKA2000-12-ANB-AC230/400/41.5MTF	103415
1250A	NKA2000-12-FB-AC230/230/240TF	214396
1250A	NKA2000-12-FB-AC230/230/240MTF	214397
1250A	NKA2000-12-FB-AC230/400/41.5TF	214398

NKA-2000 Withdrawable 3P

1250A	NKA2000-12-FB-AC230/400/41.5MTF	214399
1600A	NKA2000-S-ABD-AC230/230/240TF	103499
1600A	NKA2000-S-ABD-AC230/230/240MTF	103501
1600A	NKA2000-S-ABD-AC230/400/41.5TF	103500
1600A	NKA2000-S-ABD-AC230/400/41.5MTF	103502
1600A	NKA2000-S-HB-AC230/230/240TF	214304
1600A	NKA2000-S-HB-AC230/230/240MTF	214305
1600A	NKA2000-S-HB-AC230/400/41.5TF	214306
1600A	NKA2000-S-HB-AC230/400/41.5MTF	214307
1600A	NKA2000-S-ABD-AC230/230/240TF	103503
1600A	NKA2000-S-ABD-AC230/230/240-3FI HTP	213946
1600A	NKA2000-S-ABD-AC230/230/240MTF	103502
1600A	NKA2000-S-ABD-AC230/230/240AN-3FI HTP	213947
1600A	NKA2000-S-ABD-AC230/400/41.5TF	103501
1600A	NKA2000-S-ABD-AC230/400/41.5MTF	103503
1600A	NKA2000-S-FB-AC230/230/240TF	214308
1600A	NKA2000-S-FB-AC230/230/240MTF	214309
1600A	NKA2000-S-FB-AC230/400/41.5TF	214300
1600A	NKA2000-S-FB-AC230/400/41.5MTF	214301
3000A	NKA2000-A-BD-AC230/230/240TF	103507
3000A	NKA2000-A-BD-AC230/230/240MTF	103509
3000A	NKA2000-A-BD-AC230/400/41.5TF	103505
3000A	NKA2000-A-BD-AC230/400/41.5MTF	103507
3000A	NKA2000-HB-AC230/230/240TF	214304
3000A	NKA2000-HB-AC230/230/240MTF	214305
3000A	NKA2000-HB-AC230/400/41.5TF	214306
3000A	NKA2000-HB-AC230/400/41.5MTF	214309
3000A	NKA2000-ABD-AC230/230/240TF	103511
3000A	NKA2000-ABD-AC230/230/240-3FI HTP	213948
3000A	NKA2000-ABD-AC230/230/240MTF	103580
3000A	NKA2000-ABD-AC230/230/240AN-3FI HTP	213949
3000A	NKA2000-ABD-AC230/400/41.5TF	103509
3000A	NKA2000-ABD-AC230/400/41.5MTF	103511
3000A	NKA2000-FB-AC230/230/240TF	214310
3000A	NKA2000-FB-AC230/230/240MTF	214311
3000A	NKA2000-FB-AC230/400/41.5TF	214309
3000A	NKA2000-FB-AC230/400/41.5MTF	214312

NKA-2000 Withdrawable 4P

Rated Current	Description	Code
200A	NKA20 H03-A-B4-AC220/230/240TF	932538
200A	NKA20 H03-A-B4-AC220/230/240MTF	932539
200A	NKA20 H03-A-B4-AC230/400/415TF	932586
200A	NKA20 H03-A-B4-AC230/400/415MTF	932578
200A	NKA20 H03-A-B4-DC110TF	932634
200A	NKA20 H03-A-B4-DC110MTF	932614
200A	NKA20 H03-A-B4-DC220TF	932633
200A	NKA20 H03-A-B4-DC220MTF	932632
200A	NKA20 H03-H-B4-AC220/230/240TF	211898
200A	NKA20 H03-H-B4-AC220/230/240MTF	211899
200A	NKA20 H03-H-B4-AC230/400/415TF	211900
200A	NKA20 H03-H-B4-AC230/400/415MTF	211901
200A	NKA20 H03-H-B4-DC110TF	211902
200A	NKA20 H03-H-B4-DC110MTF	211903
200A	NKA20 H03-H-B4-DC220TF	211904
200A	NKA20 H03-H-B4-DC220MTF	211905
200A	NKA20 H03-WB4-AC220/230/240TF	932542
200A	NKA20 H03-WB4-AC220/230/240MTF	932544
200A	NKA20 H03-WB4-AC230/400/415TF	932590
200A	NKA20 H03-WB4-AC230/400/415MTF	932582
200A	NKA20 H03-WB4-DC110TF	932638
200A	NKA20 H03-WB4-DC110MTF	932636
200A	NKA20 H03-WB4-DC220TF	932635
200A	NKA20 H03-WB4-DC220MTF	932634
200A	NKA20 H03-FB4-AC220/230/240TF	211826
200A	NKA20 H03-FB4-AC220/230/240MTF	211827
200A	NKA20 H03-FB4-AC230/400/415TF	211828
200A	NKA20 H03-FB4-AC230/400/415MTF	211829
200A	NKA20 H03-FB4-DC110TF	211870
200A	NKA20 H03-FB4-DC110MTF	211871
200A	NKA20 H03-FB4-DC220TF	211872
200A	NKA20 H03-FB4-DC220MTF	211873
300A	NKA20 H03-A-B4-AC220/230/240TF	932546
300A	NKA20 H03-A-B4-AC220/230/240MTF	932538
300A	NKA20 H03-A-B4-AC230/400/415TF	932594
300A	NKA20 H03-A-B4-AC230/400/415MTF	932586
300A	NKA20 H03-A-B4-DC110TF	932642
300A	NKA20 H03-A-B4-DC110MTF	932622
300A	NKA20 H03-A-B4-DC220TF	932690
300A	NKA20 H03-A-B4-DC220MTF	932670
300A	NKA20 H03-H-B4-AC220/230/240TF	211922
300A	NKA20 H03-H-B4-AC220/230/240MTF	211923
300A	NKA20 H03-H-B4-AC230/400/415TF	211924
300A	NKA20 H03-H-B4-AC230/400/415MTF	211925
300A	NKA20 H03-H-B4-DC110TF	211926

NKA-2000 Withdrawable 4P

Rated Current	Description	Code
300A	NKA20 H03-H-B4-DC110MTF	211927
300A	NKA20 H03-H-B4-DC220TF	211928
300A	NKA20 H03-H-B4-DC220MTF	211929
300A	NKA20 H03-WB4-AC220/230/240TF	932550
300A	NKA20 H03-WB4-AC220/230/240MTF	932542
300A	NKA20 H03-WB4-AC230/400/415TF	932598
300A	NKA20 H03-WB4-AC230/400/415MTF	932590
300A	NKA20 H03-WB4-DC110TF	932648
300A	NKA20 H03-WB4-DC110MTF	932628
300A	NKA20 H03-WB4-DC220TF	932694
300A	NKA20 H03-WB4-DC220MTF	932674
300A	NKA20 H03-FB4-AC220/230/240TF	211920
300A	NKA20 H03-FB4-AC220/230/240MTF	211921
300A	NKA20 H03-FB4-AC230/400/415TF	211922
300A	NKA20 H03-FB4-AC230/400/415MTF	211923
300A	NKA20 H03-FB4-DC110TF	211924
300A	NKA20 H03-FB4-DC110MTF	211925
300A	NKA20 H03-FB4-DC220TF	211926
300A	NKA20 H03-FB4-DC220MTF	211927
1000A	NKA20 H10-A-B4-AC220/230/240TF	932554
1000A	NKA20 H10-A-B4-AC220/230/240MTF	932546
1000A	NKA20 H10-A-B4-AC230/400/415TF	932602
1000A	NKA20 H10-A-B4-AC230/400/415MTF	932594
1000A	NKA20 H10-A-B4-DC110TF	932650
1000A	NKA20 H10-A-B4-DC110MTF	932630
1000A	NKA20 H10-A-B4-DC220TF	932698
1000A	NKA20 H10-A-B4-DC220MTF	932678
1000A	NKA20 H10-H-B4-AC220/230/240TF	212020
1000A	NKA20 H10-H-B4-AC220/230/240MTF	212021
1000A	NKA20 H10-H-B4-AC230/400/415TF	212022
1000A	NKA20 H10-H-B4-AC230/400/415MTF	212023
1000A	NKA20 H10-H-B4-DC110TF	212024
1000A	NKA20 H10-H-B4-DC110MTF	212025
1000A	NKA20 H10-H-B4-DC220TF	212026
1000A	NKA20 H10-H-B4-DC220MTF	212027
1000A	NKA20 H10-WB4-AC220/230/240TF	932558
1000A	NKA20 H10-WB4-AC220/230/240MTF	932550
1000A	NKA20 H10-WB4-AC230/400/415TF	932604
1000A	NKA20 H10-WB4-AC230/400/415MTF	932596
1000A	NKA20 H10-WB4-DC110TF	932654
1000A	NKA20 H10-WB4-DC110MTF	932634

NKA-2000 Withdrawable 4P

Rated Current	Description:	Code
3000A	NKA20H20-HB4-AC220/230/240TF	912223
3000A	NKA20H20-HB4-AC220/230/240ANTF	912223
3000A	NKA20H20-HB4-AC230/400/415TF	912224
3000A	NKA20H20-HB4-AC230/400/415ANTF	912225
3000A	NKA20H20-HB4-DC110TF	912226
3000A	NKA20H20-HB4-DC110ANTF	912227
3000A	NKA20H20-HB4-DC220TF	912228
3000A	NKA20H20-HB4-DC220ANTF	912229
3000A	NKA20H20-AB4-AC220/230/240TF	942232
3000A	NKA20H20-AB4-AC220/230/240ANTF	942233
3000A	NKA20H20-AB4-AC230/400/415TF	942234
3000A	NKA20H20-AB4-AC230/400/415ANTF	942235
3000A	NKA20H20-AB4-DC110TF	942236
3000A	NKA20H20-AB4-DC110ANTF	942237
3000A	NKA20H20-AB4-DC220TF	942238
3000A	NKA20H20-AB4-DC220ANTF	942239
3000A	NKA20H20-FB4-AC220/230/240TF	912190
3000A	NKA20H20-FB4-AC220/230/240ANTF	912191
3000A	NKA20H20-FB4-AC230/400/415TF	912192
3000A	NKA20H20-FB4-AC230/400/415ANTF	912193
3000A	NKA20H20-FB4-DC110TF	912194
3000A	NKA20H20-FB4-DC110ANTF	912195
3000A	NKA20H20-FB4-DC220TF	912196
3000A	NKA20H20-FB4-DC220ANTF	912197
300A	NKA20H03-AB4-AC220/230/240TF	942232
300A	NKA20H03-AB4-AC220/230/240ANTF	942233
300A	NKA20H03-AB4-AC230/400/415TF	942234
300A	NKA20H03-AB4-AC230/400/415ANTF	942235
300A	NKA20H03-AB4-DC110TF	942236
300A	NKA20H03-AB4-DC110ANTF	942237
300A	NKA20H03-AB4-DC220TF	942238
300A	NKA20H03-AB4-DC220ANTF	942239
300A	NKA20H03-HB4-AC220/230/240TF	912223
300A	NKA20H03-HB4-AC220/230/240ANTF	912223
300A	NKA20H03-HB4-AC230/400/415TF	912224
300A	NKA20H03-HB4-AC230/400/415ANTF	912225
300A	NKA20H03-HB4-DC110TF	912226
300A	NKA20H03-HB4-DC110ANTF	912227
300A	NKA20H03-HB4-DC220TF	912228
300A	NKA20H03-HB4-DC220ANTF	912229
300A	NKA20H03-FB4-AC220/230/240TF	912190
300A	NKA20H03-FB4-AC220/230/240ANTF	912191
300A	NKA20H03-FB4-AC230/400/415TF	912192
300A	NKA20H03-FB4-AC230/400/415ANTF	912193
300A	NKA20H03-FB4-DC110TF	912194
300A	NKA20H03-FB4-DC110ANTF	912195
300A	NKA20H03-FB4-DC220TF	912196
300A	NKA20H03-FB4-DC220ANTF	912197

NKA-2000 Withdrawable 4P

300A	NKA20H03-AB4-AC220/230/240ANTF	942232
300A	NKA20H03-AB4-AC230/400/415TF	942233
300A	NKA20H03-AB4-AC230/400/415ANTF	942234
300A	NKA20H03-AB4-DC110TF	942235
300A	NKA20H03-AB4-DC110ANTF	942236
300A	NKA20H03-AB4-DC220TF	942237
300A	NKA20H03-AB4-DC220ANTF	942238
300A	NKA20H03-FB4-AC220/230/240TF	912190
300A	NKA20H03-FB4-AC220/230/240ANTF	912191
300A	NKA20H03-FB4-AC230/400/415TF	912192
300A	NKA20H03-FB4-AC230/400/415ANTF	912193
300A	NKA20H03-FB4-DC110TF	912194
300A	NKA20H03-FB4-DC110ANTF	912195
300A	NKA20H03-FB4-DC220TF	912196
300A	NKA20H03-FB4-DC220ANTF	912197
300A	NKA20H03-AB4-AC220/230/240TF	942232
300A	NKA20H03-AB4-AC220/230/240ANTF	942233
300A	NKA20H03-AB4-AC230/400/415TF	942234
300A	NKA20H03-AB4-AC230/400/415ANTF	942235
300A	NKA20H03-AB4-DC110TF	942236
300A	NKA20H03-AB4-DC110ANTF	942237
300A	NKA20H03-AB4-DC220TF	942238
300A	NKA20H03-AB4-DC220ANTF	942239
300A	NKA20H03-HB4-AC220/230/240TF	912223
300A	NKA20H03-HB4-AC220/230/240ANTF	912223
300A	NKA20H03-HB4-AC230/400/415TF	912224
300A	NKA20H03-HB4-AC230/400/415ANTF	912225
300A	NKA20H03-HB4-DC110TF	912226
300A	NKA20H03-HB4-DC110ANTF	912227
300A	NKA20H03-HB4-DC220TF	912228
300A	NKA20H03-HB4-DC220ANTF	912229
300A	NKA20H03-FB4-AC220/230/240TF	912190
300A	NKA20H03-FB4-AC220/230/240ANTF	912191

NKA-2000 With rowable 4P

Rated Current	Description	Code
800A	NKA20 H08-FB4-AC230/400/41.5TF	942230
800A	NKA20 H08-FB4-AC230/400/41.5ATF	942231
800A	NKA20 H08-FB4-BC110TF	942232
800A	NKA20 H08-FB4-BC110ATF	942233
800A	NKA20 H08-FB4-BC220TF	942234
800A	NKA20 H08-FB4-BC220ATF	942235
1000A	NKA20 H10-AB4-AC230/230/240TF	940405
1000A	NKA20 H10-AB4-AC230/230/240ATF	942236
1000A	NKA20 H10-AB4-AC230/400/41.5TF	940430
1000A	NKA20 H10-AB4-AC230/400/41.5ATF	942237
1000A	NKA20 H10-AB4-BC110TF	940406
1000A	NKA20 H10-AB4-BC110ATF	942238
1000A	NKA20 H10-AB4-BC220TF	942239
1000A	NKA20 H10-AB4-BC220ATF	942240
1000A	NKA20 H10-HB4-AC230/230/240TF	942241
1000A	NKA20 H10-HB4-AC230/230/240ATF	942242
1000A	NKA20 H10-HB4-AC230/400/41.5TF	942243
1000A	NKA20 H10-HB4-AC230/400/41.5ATF	942244
1000A	NKA20 H10-HB4-BC110TF	942245
1000A	NKA20 H10-HB4-BC110ATF	942246
1000A	NKA20 H10-HB4-BC220TF	942247
1000A	NKA20 H10-HB4-BC220ATF	942248
1000A	NKA20 H10-AB4-AC230/230/240TF	940405
1000A	NKA20 H10-AB4-AC230/230/240ATF	942236
1000A	NKA20 H10-AB4-AC230/400/41.5TF	940430
1000A	NKA20 H10-AB4-AC230/400/41.5ATF	942237
1000A	NKA20 H10-AB4-BC110TF	940406
1000A	NKA20 H10-AB4-BC110ATF	942238
1000A	NKA20 H10-AB4-BC220TF	942239
1000A	NKA20 H10-AB4-BC220ATF	942240
1000A	NKA20 H10-FB4-AC230/230/240TF	942231
1000A	NKA20 H10-FB4-AC230/230/240ATF	942232
1000A	NKA20 H10-FB4-AC230/400/41.5TF	942233
1000A	NKA20 H10-FB4-AC230/400/41.5ATF	942234
1000A	NKA20 H10-FB4-AC230/400/41.5ATF	942235
1000A	NKA20 H10-FB4-BC110TF	942236
1000A	NKA20 H10-FB4-BC110ATF	942237
1000A	NKA20 H10-FB4-BC220TF	942238
1000A	NKA20 H10-FB4-BC220ATF	942239
1250A	NKA20 H12-AB4-AC230/230/240TF	940410
1250A	NKA20 H12-AB4-AC230/230/240ATF	942236
1250A	NKA20 H12-AB4-AC230/400/41.5TF	940430

NKA-2000 With rowable 4P

1250A	NKA20 H12-AB4-AC230/400/41.5ATF	942237
1250A	NKA20 H12-AB4-BC110TF	942238
1250A	NKA20 H12-AB4-BC110ATF	942239
1250A	NKA20 H12-AB4-BC220TF	942240
1250A	NKA20 H12-AB4-BC220ATF	942241
1250A	NKA20 H12-HB4-AC230/230/240TF	942242
1250A	NKA20 H12-HB4-AC230/230/240ATF	942243
1250A	NKA20 H12-HB4-AC230/400/41.5TF	942244
1250A	NKA20 H12-HB4-AC230/400/41.5ATF	942245
1250A	NKA20 H12-HB4-BC110TF	942246
1250A	NKA20 H12-HB4-BC110ATF	942247
1250A	NKA20 H12-HB4-BC220TF	942248
1250A	NKA20 H12-HB4-BC220ATF	942249
1250A	NKA20 H12-AB4-AC230/230/240TF	940410
1250A	NKA20 H12-AB4-AC230/230/240ATF	942236
1250A	NKA20 H12-AB4-AC230/400/41.5TF	940430
1250A	NKA20 H12-AB4-AC230/400/41.5ATF	942237
1250A	NKA20 H12-AB4-BC110TF	940406
1250A	NKA20 H12-AB4-BC110ATF	942238
1250A	NKA20 H12-AB4-BC220TF	942239
1250A	NKA20 H12-AB4-BC220ATF	942240
1250A	NKA20 H12-FB4-AC230/230/240TF	942231
1250A	NKA20 H12-FB4-AC230/230/240ATF	942232
1250A	NKA20 H12-FB4-AC230/400/41.5TF	942233
1250A	NKA20 H12-FB4-AC230/400/41.5ATF	942234
1250A	NKA20 H12-FB4-BC110TF	942235
1250A	NKA20 H12-FB4-BC110ATF	942236
1250A	NKA20 H12-FB4-BC220TF	942237
1250A	NKA20 H12-FB4-BC220ATF	942238
1250A	NKA20 H12-HB4-AC230/230/240TF	942242
1250A	NKA20 H12-HB4-AC230/230/240ATF	942243
1250A	NKA20 H12-HB4-AC230/400/41.5TF	942244
1250A	NKA20 H12-HB4-AC230/400/41.5ATF	942245

NKA-2000 Withdrawable 4P

Rated Current	Description	Code
1600A	NKA20H16-HB4-BC110TF	214378
1600A	NKA20H16-HB4-BC110MTF	214379
1600A	NKA20H16-HB4-BC220TF	214379
1600A	NKA20H16-HB4-BC220MTF	214379
1600A	NKA20H16-MB4-NC220/220/340TF	940922
1600A	NKA20H16-MB4-NC220/220/340MTF	942868
1600A	NKA20H16-MB4-NC220/400/415TF	940470
1600A	NKA20H16-MB4-NC220/400/415MTF	942896
1600A	NKA20H16-MB4-BC110TF	942016
1600A	NKA20H16-MB4-BC110MTF	942946
1600A	NKA20H16-MB4-BC220TF	942864
1600A	NKA20H16-MB4-BC220MTF	942997
1600A	NKA20H16-FB4-NC220/220/340TF	214380
1600A	NKA20H16-FB4-NC220/220/340MTF	214381
1600A	NKA20H16-FB4-NC220/400/415TF	214382
1600A	NKA20H16-FB4-NC220/400/415MTF	214383
1600A	NKA20H16-FB4-BC110TF	214384
1600A	NKA20H16-FB4-BC110MTF	214385
1600A	NKA20H16-FB4-BC220TF	214386
1600A	NKA20H16-FB4-BC220MTF	214387
2000A	NKA20H20-AB4-AC220/220/340TF	940926
2000A	NKA20H20-AB4-AC220/220/340MTF	942892
2000A	NKA20H20-AB4-AC220/400/415TF	940974
2000A	NKA20H20-AB4-AC220/400/415MTF	942900
2000A	NKA20H20-AB4-BC110TF	942020
2000A	NKA20H20-AB4-BC110MTF	942948
2000A	NKA20H20-AB4-BC220TF	942866
2000A	NKA20H20-AB4-BC220MTF	942998
2000A	NKA20H20-HB4-AC220/220/340TF	214388
2000A	NKA20H20-HB4-AC220/220/340MTF	214389
2000A	NKA20H20-HB4-AC220/400/415TF	214390
2000A	NKA20H20-HB4-AC220/400/415MTF	214391
2000A	NKA20H20-HB4-BC110TF	214392
2000A	NKA20H20-HB4-BC110MTF	214393
2000A	NKA20H20-HB4-BC220TF	214394
2000A	NKA20H20-HB4-BC220MTF	214395
2000A	NKA20H20-MB4-NC220/220/340TF	940930
2000A	NKA20H20-MB4-NC220/220/340MTF	942896
2000A	NKA20H20-MB4-NC220/400/415TF	940478
2000A	NKA20H20-MB4-NC220/400/415MTF	942904
2000A	NKA20H20-MB4-BC110TF	942024

NKA-2000 Withdrawable 4P

Rated Current	Description	Code
2000A	NKA20H20-MB4-BC110MTF	942920
2000A	NKA20H20-MB4-BC220TF	942972
2000A	NKA20H20-MB4-BC220MTF	943000
2000A	NKA20H20-FB4-AC220/220/340TF	214396
2000A	NKA20H20-FB4-AC220/220/340MTF	214397
2000A	NKA20H20-FB4-AC220/400/415TF	214398
2000A	NKA20H20-FB4-AC220/400/415MTF	214399
2000A	NKA20H20-FB4-BC110TF	214400
2000A	NKA20H20-FB4-BC110MTF	214401
2000A	NKA20H20-FB4-BC220TF	214402
2000A	NKA20H20-FB4-BC220MTF	214403
200A	NKA20S06-AB4-AC220/220/340TF	103469
200A	NKA20S06-AB4-AC220/220/340MTF	193241
200A	NKA20S06-AB4-AC220/400/415TF	103477
200A	NKA20S06-AB4-AC220/400/415MTF	193289
200A	NKA20S06-HB4-AC220/220/340TF	214430
200A	NKA20S06-HB4-AC220/220/340MTF	214431
200A	NKA20S06-HB4-AC220/400/415TF	214432
200A	NKA20S06-HB4-AC220/400/415MTF	214433
200A	NKA20S06-AB4-AC220/220/340TF	103473
200A	NKA20S06-AB4-AC220/220/340MTF	193245
200A	NKA20S06-MB4-AC220/400/415TF	103491
200A	NKA20S06-MB4-AC220/400/415MTF	193290
200A	NKA20S06-FB4-AC220/220/340TF	214434
200A	NKA20S06-FB4-AC220/220/340MTF	214435
200A	NKA20S06-FB4-AC220/400/415TF	214436
200A	NKA20S06-FB4-AC220/400/415MTF	214437
200A	NKA20S06-AB4-AC220/220/340TF	103477
200A	NKA20S06-AB4-AC220/220/340MTF	193249
200A	NKA20S06-AB4-AC220/400/415TF	103495
200A	NKA20S06-AB4-AC220/400/415MTF	193297
200A	NKA20S06-HB4-AC220/220/340TF	214472
200A	NKA20S06-HB4-AC220/220/340MTF	214473
200A	NKA20S06-HB4-AC220/400/415TF	214474
200A	NKA20S06-HB4-AC220/400/415MTF	214475
200A	NKA20S06-MB4-AC220/220/340TF	103491
200A	NKA20S06-MB4-AC220/220/340MTF	193250
200A	NKA20S06-MB4-AC220/400/415TF	103499
200A	NKA20S06-MB4-AC220/400/415MTF	193481
200A	NKA20S06-FB4-AC220/220/340TF	214496
200A	NKA20S06-FB4-AC220/220/340MTF	214497

NKA-2000 Withdrawable 4P

Rated Current	Description	Code
300A	NKA2000B-PB4-AC200/300/415TF	214899
300A	NKA2000B-PB4-AC200/300/415MTF	214899
1000A	NKA20010-AB4-AC220/220/240TF	108405
1000A	NKA20010-AB4-AC220/220/240MTF	102337
1000A	NKA20010-AB4-AC200/300/415TF	108423
1000A	NKA20010-AB4-AC200/300/415MTF	102405
1000A	NKA20010-HB4-AC220/220/240TF	214744
1000A	NKA20010-HB4-AC220/220/240MTF	214745
1000A	NKA20010-HB4-AC200/300/415TF	214746
1000A	NKA20010-HB4-AC200/300/415MTF	214747
1000A	NKA20010-AB4-AC220/220/240TF	108409
1000A	NKA20010-AB4-AC220/220/240MTF	102361
1000A	NKA20010-AB4-AC200/300/415TF	108437
1000A	NKA20010-AB4-AC200/300/415MTF	102409
1000A	NKA20010-PB4-AC220/220/240TF	214728
1000A	NKA20010-PB4-AC220/220/240MTF	214729
1000A	NKA20010-PB4-AC200/300/415TF	214730
1000A	NKA20010-PB4-AC200/300/415MTF	214731
1250A	NKA20012-AB4-AC220/220/240TF	108493
1250A	NKA20012-AB4-AC220/220/240MTF	102363
1250A	NKA20012-AB4-AC200/300/415TF	108541
1250A	NKA20012-AB4-AC200/300/415MTF	102413
1250A	NKA20012-HB4-AC220/220/240TF	214776
1250A	NKA20012-HB4-AC220/220/240MTF	214777
1250A	NKA20012-HB4-AC200/300/415TF	214778
1250A	NKA20012-HB4-AC200/300/415MTF	214779
1250A	NKA20012-AB4-AC220/220/240TF	108497
1250A	NKA20012-AB4-AC220/220/240MTF	102369
1250A	NKA20012-AB4-AC200/300/415TF	108545
1250A	NKA20012-AB4-AC200/300/415MTF	102417
1250A	NKA20012-PB4-AC220/220/240TF	214780
1250A	NKA20012-PB4-AC220/220/240MTF	214781
1250A	NKA20012-PB4-AC200/300/415TF	214782
1250A	NKA20012-PB4-AC200/300/415MTF	214783
1600A	NKA20016-AB4-AC220/220/240TF	108501
1600A	NKA20016-AB4-AC220/220/240MTF	102373
1600A	NKA20016-AB4-AC200/300/415TF	108549
1600A	NKA20016-AB4-AC200/300/415MTF	102377
1600A	NKA20016-HB4-AC220/220/240TF	214808
1600A	NKA20016-HB4-AC220/220/240MTF	214809
1600A	NKA20016-HB4-AC200/300/415TF	214810

NKA-2000 Withdrawable 4P

Rated Current	Description	Code
1600A	NKA20016-HB4-AC200/300/415MTF	214811
1600A	NKA20016-AB4-AC220/220/240TF	108505
1600A	NKA20016-AB4-AC220/220/240MTF	102377
1600A	NKA20016-HB4-AC200/300/415TF	108553
1600A	NKA20016-AB4-AC200/300/415MTF	102425
1600A	NKA20016-PB4-AC220/220/240TF	214792
1600A	NKA20016-PB4-AC220/220/240MTF	214793
1600A	NKA20016-PB4-AC200/300/415TF	214794
1600A	NKA20016-PB4-AC200/300/415MTF	214795
2000A	NKA20020-AB4-AC220/220/240TF	108509
2000A	NKA20020-AB4-AC220/220/240MTF	102381
2000A	NKA20020-AB4-AC200/300/415TF	108517
2000A	NKA20020-AB4-AC200/300/415MTF	102397
2000A	NKA20020-HB4-AC220/220/240TF	214840
2000A	NKA20020-HB4-AC220/220/240MTF	214841
2000A	NKA20020-HB4-AC200/300/415TF	214842
2000A	NKA20020-HB4-AC200/300/415MTF	214843
2000A	NKA20020-AB4-AC220/220/240TF	108513
2000A	NKA20020-AB4-AC220/220/240MTF	102385
2000A	NKA20020-AB4-AC200/300/415TF	108561
2000A	NKA20020-AB4-AC200/300/415MTF	102393
2000A	NKA20020-PB4-AC220/220/240TF	214824
2000A	NKA20020-PB4-AC220/220/240MTF	214825
2000A	NKA20020-PB4-AC200/300/415TF	214826
2000A	NKA20020-PB4-AC200/300/415MTF	214827

NKA-3200 Fixed 3P

Rated Current	Description	Code
1600A	NKA32 H1-S-AP3-AC220/230/240TF	942073
1600A	NKA32 H1-S-AP3-AC220/230/240ANTF	942080
1600A	NKA32 H1-S-AP3-AC220/230/240A-3P11HTF	216134
1600A	NKA32 H1-S-AP3-AC220/240/415TF	942107
1600A	NKA32 H1-S-AP3-AC220/240/415ANTF	942093
1600A	NKA32 H1-S-AP3-BC110TF	942129
1600A	NKA32 H1-S-AP3-BC110ANTF	942067
1600A	NKA32 H1-S-AP3-BC220TF	942171
1600A	NKA32 H1-S-AP3-BC220ANTF	942099
1600A	NKA32 H1-S-HP3-AC220/230/240TF	212851
1600A	NKA32 H1-S-HP3-AC220/230/240ANTF	212853
1600A	NKA32 H1-S-HP3-AC220/240/415TF	212850
1600A	NKA32 H1-S-HP3-AC220/240/415ANTF	212854
1600A	NKA32 H1-S-HP3-BC110TF	212855
1600A	NKA32 H1-S-HP3-BC110ANTF	212856
1600A	NKA32 H1-S-HP3-BC220TF	212857
1600A	NKA32 H1-S-HP3-BC220ANTF	212858
1600A	NKA32 H1-S-WP3-AC220/230/240TF	942079
1600A	NKA32 H1-S-WP3-AC220/230/240-3P11HTF	216098
1600A	NKA32 H1-S-WP3-AC220/230/240ANTF	942087
1600A	NKA32 H1-S-WP3-AC220/230/240A-3P11HTF	216099
1600A	NKA32 H1-S-WP3-AC220/240/415TF	942111
1600A	NKA32 H1-S-WP3-AC220/240/415ANTF	942090
1600A	NKA32 H1-S-WP3-BC110TF	942140
1600A	NKA32 H1-S-WP3-BC110ANTF	942071
1600A	NKA32 H1-S-WP3-BC220TF	942173
1600A	NKA32 H1-S-WP3-BC220ANTF	942100
1600A	NKA32 H1-S-PP3-AC220/230/240TF	212868
1600A	NKA32 H1-S-PP3-AC220/230/240ANTF	212869
1600A	NKA32 H1-S-PP3-AC220/240/415TF	212870
1600A	NKA32 H1-S-PP3-AC220/240/415ANTF	212871
1600A	NKA32 H1-S-PP3-BC110TF	212872
1600A	NKA32 H1-S-PP3-BC110ANTF	212873
1600A	NKA32 H1-S-PP3-BC220TF	212874
1600A	NKA32 H1-S-PP3-BC220ANTF	212875
2000A	NKA32 H20-AP3-AC220/230/240TF	942083
2000A	NKA32 H20-AP3-AC220/230/240ANTF	942011
2000A	NKA32 H20-AP3-AC220/230/240A-3P11HTF	216137
2000A	NKA32 H20-AP3-AC220/240/415TF	942113
2000A	NKA32 H20-AP3-AC220/240/415ANTF	942040

NKA-3200 Fixed 3P

Rated Current	Description	Code
2000A	NKA32 H20-AP3-BC110TF	942147
2000A	NKA32 H20-AP3-BC110ANTF	942075
2000A	NKA32 H20-AP3-BC220TF	942179
2000A	NKA32 H20-AP3-BC220ANTF	942107
2000A	NKA32 H20-HP3-AC220/230/240TF	212913
2000A	NKA32 H20-HP3-AC220/230/240ANTF	212916
2000A	NKA32 H20-HP3-AC220/240/415TF	212917
2000A	NKA32 H20-HP3-AC220/240/415ANTF	212918
2000A	NKA32 H20-HP3-BC110TF	212919
2000A	NKA32 H20-HP3-BC110ANTF	212920
2000A	NKA32 H20-HP3-BC220TF	212921
2000A	NKA32 H20-HP3-BC220ANTF	212922
2000A	NKA32 H20-WP3-AC220/230/240TF	942087
2000A	NKA32 H20-WP3-AC220/230/240-3P11HTF	216100
2000A	NKA32 H20-WP3-AC220/230/240ANTF	942013
2000A	NKA32 H20-WP3-AC220/230/240A-3P11HTF	216101
2000A	NKA32 H20-WP3-AC220/240/415TF	942119
2000A	NKA32 H20-WP3-AC220/240/415ANTF	942047
2000A	NKA32 H20-WP3-BC110TF	942151
2000A	NKA32 H20-WP3-BC110ANTF	942079
2000A	NKA32 H20-WP3-BC220TF	942180
2000A	NKA32 H20-WP3-BC220ANTF	942111
2000A	NKA32 H20-PP3-AC220/230/240TF	212880
2000A	NKA32 H20-PP3-AC220/230/240ANTF	212881
2000A	NKA32 H20-PP3-AC220/240/415TF	212883
2000A	NKA32 H20-PP3-AC220/240/415ANTF	212884
2000A	NKA32 H20-PP3-BC110TF	212887
2000A	NKA32 H20-PP3-BC110ANTF	212888
2000A	NKA32 H20-PP3-BC220TF	212889
2000A	NKA32 H20-PP3-BC220ANTF	212890
2500A	NKA32 H25-AP3-AC220/230/240TF	942091
2500A	NKA32 H25-AP3-AC220/230/240ANTF	942019
2500A	NKA32 H25-AP3-AC220/230/240A-3P11HTF	216138
2500A	NKA32 H25-AP3-AC220/240/415TF	942120
2500A	NKA32 H25-AP3-AC220/240/415ANTF	942051
2500A	NKA32 H25-AP3-BC110TF	942153
2500A	NKA32 H25-AP3-BC110ANTF	942080
2500A	NKA32 H25-AP3-BC220TF	942187
2500A	NKA32 H25-AP3-BC220ANTF	942115
2500A	NKA32 H25-HP3-AC220/230/240TF	212979

NKA-3200 Fixed 3P

Rated Current	Description	Code
2500A	NKA32 H25-H P3-AC220/230/240A TP	212980
2500A	NKA32 H25-H P3-AC220/230/240A 1.5TP	212981
2500A	NKA32 H25-H P3-AC220/230/240A 1.5A TP	212982
2500A	NKA32 H25-H P3-BC110 TP	212983
2500A	NKA32 H25-H P3-BC110A TP	212984
2500A	NKA32 H25-H P3-BC220 TP	212985
2500A	NKA32 H25-H P3-BC220A TP	212986
2500A	NKA32 H25-H P3-AC220/230/240A TP	942095
2500A	NKA32 H25-H P3-AC220/230/240-3P 1.5 TP	214107
2500A	NKA32 H25-H P3-AC220/230/240A TP	942093
2500A	NKA32 H25-H P3-AC220/230/240A-3P 1.5 TP	214103
2500A	NKA32 H25-H P3-AC220/230/240A 1.5 TP	942124
2500A	NKA32 H25-H P3-AC220/230/240A 1.5A TP	942095
2500A	NKA32 H25-H P3-BC110 TP	942129
2500A	NKA32 H25-H P3-BC110A TP	942087
2500A	NKA32 H25-H P3-BC220 TP	942191
2500A	NKA32 H25-H P3-BC220A TP	942119
2500A	NKA32 H25-P P3-AC220/230/240 TP	212947
2500A	NKA32 H25-P P3-AC220/230/240A TP	212948
2500A	NKA32 H25-P P3-AC220/230/240A 1.5 TP	212949
2500A	NKA32 H25-P P3-AC220/230/240A 1.5A TP	212950
2500A	NKA32 H25-P P3-BC110 TP	212951
2500A	NKA32 H25-P P3-BC110A TP	212952
2500A	NKA32 H25-P P3-BC220 TP	212953
2500A	NKA32 H25-P P3-BC220A TP	212954
3200A	NKA32 H22-A P3-AC220/230/240 TP	942099
3200A	NKA32 H22-A P3-AC220/230/240A TP	942097
3200A	NKA32 H22-A P3-AC220/230/240A-3P 1.5 TP	214129
3200A	NKA32 H22-A P3-AC220/230/240A 1.5 TP	942131
3200A	NKA32 H22-A P3-AC220/230/240A 1.5A TP	942099
3200A	NKA32 H22-A P3-BC110 TP	942163
3200A	NKA32 H22-A P3-BC110A TP	942091
3200A	NKA32 H22-A P3-BC220 TP	942195
3200A	NKA32 H22-A P3-BC220A TP	942123
3200A	NKA32 H22-H P3-AC220/230/240 TP	212973
3200A	NKA32 H22-H P3-AC220/230/240A TP	212974
3200A	NKA32 H22-H P3-AC220/230/240A 1.5 TP	212975
3200A	NKA32 H22-H P3-AC220/230/240A 1.5A TP	212976
3200A	NKA32 H22-H P3-BC110 TP	212977
3200A	NKA32 H22-H P3-BC110A TP	212978

NKA-3200 Fixed 3P

Rated Current	Description	Code
3200A	NKA32 H22-H P3-BC220 TP	212979
3200A	NKA32 H22-H P3-BC220A TP	212980
3200A	NKA32 H22-A P3-AC220/230/240 TP	942103
3200A	NKA32 H22-A P3-AC220/230/240-3P 1.5 TP	214104
3200A	NKA32 H22-A P3-AC220/230/240A TP	942091
3200A	NKA32 H22-A P3-AC220/230/240A-3P 1.5 TP	214103
3200A	NKA32 H22-A P3-AC220/230/240A 1.5 TP	942135
3200A	NKA32 H22-A P3-AC220/230/240A 1.5A TP	942093
3200A	NKA32 H22-A P3-BC110 TP	942167
3200A	NKA32 H22-A P3-BC110A TP	942095
3200A	NKA32 H22-A P3-BC220 TP	942199
3200A	NKA32 H22-A P3-BC220A TP	942124
3200A	NKA32 H22-P P3-AC220/230/240 TP	212941
3200A	NKA32 H22-P P3-AC220/230/240A TP	212942
3200A	NKA32 H22-P P3-AC220/230/240A 1.5 TP	212943
3200A	NKA32 H22-P P3-AC220/230/240A 1.5A TP	212944
3200A	NKA32 H22-P P3-BC110 TP	212945
3200A	NKA32 H22-P P3-BC110A TP	212946
3200A	NKA32 H22-P P3-BC220 TP	212947
3200A	NKA32 H22-P P3-BC220A TP	212948
1600A	NKA32 H16-A P3-AC220/230/240 TP	942203
1600A	NKA32 H16-A P3-AC220/230/240A TP	942131
1600A	NKA32 H16-A P3-AC220/230/240A 1.5 TP	942225
1600A	NKA32 H16-A P3-AC220/230/240A 1.5A TP	942163
1600A	NKA32 H16-A P3-BC110 TP	942267
1600A	NKA32 H16-A P3-BC110A TP	942195
1600A	NKA32 H16-A P3-BC220 TP	942299
1600A	NKA32 H16-A P3-BC220A TP	942227
1600A	NKA32 H16-H P3-AC220/230/240 TP	214029
1600A	NKA32 H16-H P3-AC220/230/240A TP	214030
1600A	NKA32 H16-H P3-AC220/230/240A 1.5 TP	214031
1600A	NKA32 H16-H P3-AC220/230/240A 1.5A TP	214032
1600A	NKA32 H16-H P3-BC110 TP	214033
1600A	NKA32 H16-H P3-BC110A TP	214034
1600A	NKA32 H16-H P3-BC220 TP	214035
1600A	NKA32 H16-H P3-BC220A TP	214036
1600A	NKA32 H16-A P3-AC220/230/240 TP	942207
1600A	NKA32 H16-A P3-AC220/230/240-3P 1.5 TP	214106
1600A	NKA32 H16-A P3-AC220/230/240A TP	942135
1600A	NKA32 H16-A P3-AC220/230/240A-3P 1.5 TP	214107

NKA-3200 Fixed 3P

Rated Current	Description	Code
1600A	NKA32 H16-AF3-AC280/400/415TF	942239
1600A	NKA32 H16-AF3-AC280/400/415WTF	942167
1600A	NKA32 H16-AF3-BC110TF	942271
1600A	NKA32 H16-AF3-BC110WTF	942199
1600A	NKA32 H16-AF3-BC220TF	942203
1600A	NKA32 H16-AF3-BC220WTF	942231
1600A	NKA32 H16-HF3-AC220/230/240TF	214007
1600A	NKA32 H16-HF3-AC220/230/240WTF	214008
1600A	NKA32 H16-HF3-AC280/400/415TF	214009
1600A	NKA32 H16-HF3-AC280/400/415WTF	214010
1600A	NKA32 H16-HF3-BC110TF	214011
1600A	NKA32 H16-HF3-BC110WTF	214012
1600A	NKA32 H16-HF3-BC220TF	214013
1600A	NKA32 H16-HF3-BC220WTF	214014
2000A	NKA32 H20-AF3-AC220/230/240TF	942211
2000A	NKA32 H20-AF3-AC220/230/240WTF	942199
2000A	NKA32 H20-AF3-AC280/400/415TF	942243
2000A	NKA32 H20-AF3-AC280/400/415WTF	942171
2000A	NKA32 H20-AF3-BC110TF	942273
2000A	NKA32 H20-AF3-BC110WTF	942203
2000A	NKA32 H20-AF3-BC220TF	942207
2000A	NKA32 H20-AF3-BC220WTF	942235
2000A	NKA32 H20-HF3-AC220/230/240TF	214103
2000A	NKA32 H20-HF3-AC220/230/240WTF	214104
2000A	NKA32 H20-HF3-AC280/400/415TF	214105
2000A	NKA32 H20-HF3-AC280/400/415WTF	214106
2000A	NKA32 H20-HF3-BC110TF	214107
2000A	NKA32 H20-HF3-BC110WTF	214108
2000A	NKA32 H20-HF3-BC220TF	214109
2000A	NKA32 H20-HF3-BC220WTF	214110
2000A	NKA32 H20-AF3-AC220/230/240TF	942215
2000A	NKA32 H20-AF3-AC220/230/240-3P1WTF	214102
2000A	NKA32 H20-AF3-AC220/230/240WTF	942143
2000A	NKA32 H20-AF3-AC220/230/240W-3P1WTF	214109
2000A	NKA32 H20-AF3-AC280/400/415TF	942247
2000A	NKA32 H20-AF3-AC280/400/415WTF	942175
2000A	NKA32 H20-AF3-BC110TF	942279
2000A	NKA32 H20-AF3-BC110WTF	942207
2000A	NKA32 H20-AF3-BC220TF	942211
2000A	NKA32 H20-AF3-BC220WTF	942247

NKA-3200 Fixed 3P

Rated Current	Description	Code
2000A	NKA32 H20-HF3-AC220/230/240TF	214111
2000A	NKA32 H20-HF3-AC220/230/240WTF	214112
2000A	NKA32 H20-HF3-AC280/400/415TF	214113
2000A	NKA32 H20-HF3-AC280/400/415WTF	214114
2000A	NKA32 H20-HF3-BC110TF	214115
2000A	NKA32 H20-HF3-BC110WTF	214116
2000A	NKA32 H20-HF3-BC220TF	214117
2000A	NKA32 H20-HF3-BC220WTF	214118
2500A	NKA32 H25-AF3-AC220/230/240TF	942219
2500A	NKA32 H25-AF3-AC220/230/240-3P1WTF	208222
2500A	NKA32 H25-AF3-AC220/230/240WTF	942147
2500A	NKA32 H25-AF3-AC280/400/415TF	942251
2500A	NKA32 H25-AF3-AC280/400/415WTF	942179
2500A	NKA32 H25-AF3-BC110TF	942283
2500A	NKA32 H25-AF3-BC110WTF	942211
2500A	NKA32 H25-AF3-BC220TF	942215
2500A	NKA32 H25-AF3-BC220WTF	942243
2500A	NKA32 H25-HF3-AC220/230/240TF	214119
2500A	NKA32 H25-HF3-AC220/230/240WTF	214120
2500A	NKA32 H25-HF3-AC280/400/415TF	214121
2500A	NKA32 H25-HF3-AC280/400/415WTF	214122
2500A	NKA32 H25-HF3-BC110TF	214123
2500A	NKA32 H25-HF3-BC110WTF	214124
2500A	NKA32 H25-HF3-BC220TF	214125
2500A	NKA32 H25-AF3-AC220/230/240TF	942223
2500A	NKA32 H25-AF3-AC220/230/240-3P1WTF	214110
2500A	NKA32 H25-AF3-AC220/230/240WTF	942131
2500A	NKA32 H25-AF3-AC220/230/240W-3P1WTF	214111
2500A	NKA32 H25-AF3-AC280/400/415TF	942255
2500A	NKA32 H25-AF3-AC280/400/415WTF	942183
2500A	NKA32 H25-AF3-BC110TF	942287
2500A	NKA32 H25-AF3-BC110WTF	942215
2500A	NKA32 H25-AF3-BC220TF	942219
2500A	NKA32 H25-AF3-BC220WTF	942247
2500A	NKA32 H25-HF3-AC220/230/240TF	214126
2500A	NKA32 H25-HF3-AC220/230/240WTF	214127
2500A	NKA32 H25-HF3-AC280/400/415WTF	214128
2500A	NKA32 H25-HF3-BC110TF	214129

NKA-3200 Fixed 3P

Rated Current	Description	Code
2500A	NKA32 N25-FP3-BC110ATP	214140
2500A	NKA32 N25-FP3-BC220TP	214141
2500A	NKA32 N25-FP3-BC220ATP	214142
2500A	NKA32 N22-AF3-AC220/230/240TP	942224
2500A	NKA32 N22-AF3-AC220/230/240-3P11ATP	308301
2500A	NKA32 N22-AF3-AC220/230/240ATP	942135
2500A	NKA32 N22-AF3-AC280/300/315TP	942259
2500A	NKA32 N22-AF3-AC280/300/315ATP	942184
2500A	NKA32 N22-AF3-BC110TP	942291
2500A	NKA32 N22-AF3-BC110ATP	942219
2500A	NKA32 N22-AF3-BC220TP	942293
2500A	NKA32 N22-AF3-BC220ATP	942251
2500A	NKA32 N22-HF3-AC220/230/240TP	214221
2500A	NKA32 N22-HF3-AC220/230/240ATP	214222
2500A	NKA32 N22-HF3-AC280/300/315TP	214223
2500A	NKA32 N22-HF3-AC280/300/315ATP	214224
2500A	NKA32 N22-HF3-BC110TP	214225
2500A	NKA32 N22-HF3-BC110ATP	214226
2500A	NKA32 N22-HF3-BC220TP	214227
2500A	NKA32 N22-HF3-BC220ATP	214228
2500A	NKA32 N22-AF3-AC220/230/240TP	942221
2500A	NKA32 N22-AF3-AC220/230/240-3P11ATP	214112
2500A	NKA32 N22-AF3-AC220/230/240ATP	942149
2500A	NKA32 N22-AF3-AC220/230/240A-3P11ATP	214113
2500A	NKA32 N22-AF3-AC280/300/315TP	942283
2500A	NKA32 N22-AF3-AC280/300/315ATP	942191
2500A	NKA32 N22-AF3-BC110TP	942295
2500A	NKA32 N22-AF3-BC110ATP	942285
2500A	NKA32 N22-AF3-BC220TP	942227
2500A	NKA32 N22-AF3-BC220ATP	942255
2500A	NKA32 N22-FP3-AC220/230/240TP	214199
2500A	NKA32 N22-FP3-AC220/230/240ATP	214200
2500A	NKA32 N22-FP3-AC280/300/315TP	214201
2500A	NKA32 N22-FP3-AC280/300/315ATP	214202
2500A	NKA32 N22-FP3-BC110TP	214203
2500A	NKA32 N22-FP3-BC110ATP	214204
2500A	NKA32 N22-FP3-BC220TP	214205
2500A	NKA32 N22-FP3-BC220ATP	214206
1600A	NKA32S16-AF3-AC220/230/240TP	108564
1600A	NKA32S16-AF3-AC220/230/240ATP	192454

NKA-3200 Fixed 3P

Rated Current	Description	Code
1600A	NKA32S16-AF3-AC280/300/315TP	108566
1600A	NKA32S16-AF3-AC280/300/315ATP	192458
1600A	NKA32S16-HF3-AC220/230/240TP	214211
1600A	NKA32S16-HF3-AC220/230/240ATP	214212
1600A	NKA32S16-HF3-AC280/300/315TP	214213
1600A	NKA32S16-HF3-AC280/300/315ATP	214214
1600A	NKA32S16-WF3-AC220/230/240TP	108568
1600A	NKA32S16-WF3-AC220/230/240-3P11ATP	214114
1600A	NKA32S16-WF3-AC220/230/240ATP	192460
1600A	NKA32S16-WF3-AC220/230/240A-3P11ATP	214115
1600A	NKA32S16-WF3-AC280/300/315TP	108600
1600A	NKA32S16-WF3-AC280/300/315ATP	192472
1600A	NKA32S16-PF3-AC220/230/240TP	214255
1600A	NKA32S16-PF3-AC220/230/240ATP	214256
1600A	NKA32S16-PF3-AC280/300/315TP	214257
1600A	NKA32S16-PF3-AC280/300/315ATP	214258
2000A	NKA32S20-AF3-AC220/230/240TP	108572
2000A	NKA32S20-AF3-AC220/230/240ATP	192464
2000A	NKA32S20-AF3-AC280/300/315TP	108604
2000A	NKA32S20-AF3-AC280/300/315ATP	192476
2000A	NKA32S20-HF3-AC220/230/240TP	214208
2000A	NKA32S20-HF3-AC280/300/315TP	214209
2000A	NKA32S20-HF3-AC280/300/315ATP	214210
2000A	NKA32S20-WF3-AC220/230/240TP	108576
2000A	NKA32S20-WF3-AC220/230/240-3P11ATP	214116
2000A	NKA32S20-WF3-AC220/230/240ATP	192468
2000A	NKA32S20-WF3-AC220/230/240A-3P11ATP	214117
2000A	NKA32S20-WF3-AC280/300/315TP	108608
2000A	NKA32S20-WF3-AC280/300/315ATP	192480
2000A	NKA32S20-PF3-AC220/230/240TP	214259
2000A	NKA32S20-PF3-AC220/230/240ATP	214260
2000A	NKA32S20-PF3-AC280/300/315TP	214261
2000A	NKA32S20-PF3-AC280/300/315ATP	214262
2500A	NKA32S25-AF3-AC220/230/240TP	108580
2500A	NKA32S25-AF3-AC220/230/240ATP	192492
2500A	NKA32S25-HF3-AC280/300/315TP	108612
2500A	NKA32S25-AF3-AC280/300/315ATP	192484
2500A	NKA32S25-HF3-AC220/230/240TP	214263
2500A	NKA32S25-HF3-AC220/230/240ATP	214264

NKA-3200 Fixed 3P

Rated Current	Description	Code
2500A	NKA3252S-HF3-AC380/400/415VTP	214037
2500A	NKA3252S-HF3-AC380/400/415ANTP	214038
2500A	NKA3252S-MF3-AC220/230/240VTP	108584
2500A	NKA3252S-MF3-AC220/230/240-3P1-NTP	214118
2500A	NKA3252S-MF3-AC220/230/240ANTP	193456
2500A	NKA3252S-MF3-AC220/230/240AN-3P1-NTP	214119
2500A	NKA3252S-MF3-AC380/400/415VTP	108614
2500A	NKA3252S-MF3-AC380/400/415ANTP	193488
2500A	NKA3252S-FF3-AC220/230/240VTP	214019
2500A	NKA3252S-FF3-AC220/230/240ANTP	214020
2500A	NKA3252S-FF3-AC380/400/415VTP	214021
2500A	NKA3252S-FF3-AC380/400/415ANTP	214022
3200A	NKA3252S-AP3-AC220/230/240VTP	108588
3200A	NKA3252S-AP3-AC220/230/240ANTP	193460
3200A	NKA3252S-AP3-AC380/400/415VTP	108610
3200A	NKA3252S-AP3-AC380/400/415ANTP	193492
3200A	NKA3252S-HF3-AC220/230/240VTP	214047
3200A	NKA3252S-HF3-AC220/230/240ANTP	214048
3200A	NKA3252S-HF3-AC380/400/415VTP	214049
3200A	NKA3252S-HF3-AC380/400/415ANTP	214050
3200A	NKA3252S-MF3-AC220/230/240VTP	108592
3200A	NKA3252S-MF3-AC220/230/240-3P1-NTP	214120
3200A	NKA3252S-MF3-AC220/230/240ANTP	193464
3200A	NKA3252S-MF3-AC220/230/240AN-3P1-NTP	214121
3200A	NKA3252S-MF3-AC380/400/415VTP	108614
3200A	NKA3252S-MF3-AC380/400/415ANTP	193494
3200A	NKA3252S-FF3-AC220/230/240VTP	214051
3200A	NKA3252S-FF3-AC220/230/240ANTP	214052
3200A	NKA3252S-FF3-AC380/400/415VTP	214053
3200A	NKA3252S-FF3-AC380/400/415ANTP	214054

NKA-3200 Fixed 4P

Rated Current	Description	Code
1600A	NKA32H1S-AP4-AC220/230/240VTP	943007
1600A	NKA32H1S-AP4-AC220/230/240ANTP	943008
1600A	NKA32H1S-AP4-AC380/400/415VTP	943109
1600A	NKA32H1S-AP4-AC380/400/415ANTP	943007
1600A	NKA32H1S-AP4-BC110VTP	943141
1600A	NKA32H1S-AP4-BC110ANTP	943089
1600A	NKA32H1S-AP4-BC220VTP	943173
1600A	NKA32H1S-AP4-BC220ANTP	943101
1600A	NKA32H1S-AP4-AC220/230/240VTP	212859
1600A	NKA32H1S-AP4-AC220/230/240ANTP	212860

NKA-3200 Fixed 4P

1600A	NKA32H1S-HF4-AC380/400/415VTP	212861
1600A	NKA32H1S-HF4-AC380/400/415ANTP	212862
1600A	NKA32H1S-HF4-BC110VTP	212863
1600A	NKA32H1S-HF4-BC110ANTP	212864
1600A	NKA32H1S-HF4-BC220VTP	212865
1600A	NKA32H1S-HF4-BC220ANTP	212866
1600A	NKA32H1S-MF4-AC220/230/240VTP	942081
1600A	NKA32H1S-MF4-AC220/230/240ANTP	942009
1600A	NKA32H1S-MF4-AC380/400/415VTP	942112
1600A	NKA32H1S-MF4-AC380/400/415ANTP	942041
1600A	NKA32H1S-MF4-BC110VTP	942143
1600A	NKA32H1S-MF4-BC110ANTP	942072
1600A	NKA32H1S-MF4-BC220VTP	942177
1600A	NKA32H1S-MF4-BC220ANTP	942103
1600A	NKA32H1S-FF4-AC220/230/240VTP	214276
1600A	NKA32H1S-FF4-AC220/230/240ANTP	214277
1600A	NKA32H1S-FF4-AC380/400/415VTP	214278
1600A	NKA32H1S-FF4-AC380/400/415ANTP	214279
1600A	NKA32H1S-FF4-BC110VTP	214280
1600A	NKA32H1S-FF4-BC110ANTP	214281
1600A	NKA32H1S-FF4-BC220VTP	214282
1600A	NKA32H1S-FF4-BC220ANTP	214283
2000A	NKA32H2S-AP4-AC220/230/240VTP	942085
2000A	NKA32H2S-AP4-AC220/230/240ANTP	942012
2000A	NKA32H2S-AP4-AC380/400/415VTP	942117
2000A	NKA32H2S-AP4-AC380/400/415ANTP	942045
2000A	NKA32H2S-AP4-BC110VTP	942149
2000A	NKA32H2S-AP4-BC110ANTP	942077
2000A	NKA32H2S-AP4-BC220VTP	942181
2000A	NKA32H2S-AP4-BC220ANTP	942109
2000A	NKA32H2S-HF4-AC220/230/240VTP	212923
2000A	NKA32H2S-HF4-AC220/230/240ANTP	212924
2000A	NKA32H2S-HF4-AC380/400/415VTP	212925
2000A	NKA32H2S-HF4-AC380/400/415ANTP	212926
2000A	NKA32H2S-HF4-BC110VTP	212927
2000A	NKA32H2S-HF4-BC110ANTP	212928
2000A	NKA32H2S-HF4-BC220VTP	212929
2000A	NKA32H2S-HF4-BC220ANTP	212930
2000A	NKA32H2S-MF4-AC220/230/240VTP	942089
2000A	NKA32H2S-MF4-AC220/230/240ANTP	942017

NKA-3200 Fixed 4P

Rated Current	Description	Code
3000A	NKA32H20-AN4-AC220/400/41.5TF	942131
3000A	NKA32H20-AN4-AC220/400/41.5ATF	942049
3000A	NKA32H20-AN4-BC110TF	942132
3000A	NKA32H20-AN4-BC110ATF	942081
3000A	NKA32H20-AN4-BC220TF	942133
3000A	NKA32H20-AN4-BC220ATF	942112
3000A	NKA32H20-FF4-AC220/220/240TF	212891
3000A	NKA32H20-FF4-AC220/220/240ATF	212892
3000A	NKA32H20-FF4-AC220/400/41.5TF	212893
3000A	NKA32H20-FF4-AC220/400/41.5ATF	212894
3000A	NKA32H20-FF4-BC110TF	212895
3000A	NKA32H20-FF4-BC110ATF	212896
3000A	NKA32H20-FF4-BC220TF	212897
3000A	NKA32H20-FF4-BC220ATF	212898
2500A	NKA32H25-AN4-AC220/220/240TF	942092
2500A	NKA32H25-AN4-AC220/220/240ATF	942091
2500A	NKA32H25-AN4-AC220/400/41.5TF	942125
2500A	NKA32H25-AN4-AC220/400/41.5ATF	942052
2500A	NKA32H25-AN4-BC110TF	942127
2500A	NKA32H25-AN4-BC110ATF	942085
2500A	NKA32H25-AN4-BC220TF	942129
2500A	NKA32H25-AN4-BC220ATF	942117
2500A	NKA32H25-HF4-AC220/220/240TF	212987
2500A	NKA32H25-HF4-AC220/220/240ATF	212988
2500A	NKA32H25-HF4-AC220/400/41.5TF	212989
2500A	NKA32H25-HF4-AC220/400/41.5ATF	212990
2500A	NKA32H25-HF4-BC110TF	212991
2500A	NKA32H25-HF4-BC110ATF	212992
2500A	NKA32H25-HF4-BC220TF	212993
2500A	NKA32H25-HF4-BC220ATF	212994
2500A	NKA32H25-AN4-AC220/220/240TF	942097
2500A	NKA32H25-AN4-AC220/220/240ATF	942025
2500A	NKA32H25-AN4-AC220/400/41.5TF	942129
2500A	NKA32H25-AN4-AC220/400/41.5ATF	942057
2500A	NKA32H25-AN4-BC110TF	942131
2500A	NKA32H25-AN4-BC110ATF	942089
2500A	NKA32H25-AN4-BC220TF	942132
2500A	NKA32H25-AN4-BC220ATF	942121
2500A	NKA32H25-FF4-AC220/220/240TF	212955
2500A	NKA32H25-FF4-AC220/220/240ATF	212956

NKA-3200 Fixed 4P

2500A	NKA32H25-FF4-AC220/400/41.5TF	212957
2500A	NKA32H25-FF4-AC220/400/41.5ATF	212958
2500A	NKA32H25-FF4-BC110TF	212959
2500A	NKA32H25-FF4-BC110ATF	212960
2500A	NKA32H25-FF4-BC220TF	212961
2500A	NKA32H25-FF4-BC220ATF	212962
2200A	NKA32H22-AN4-AC220/220/240TF	942101
2200A	NKA32H22-AN4-AC220/220/240ATF	942029
2200A	NKA32H22-AN4-AC220/400/41.5TF	942123
2200A	NKA32H22-AN4-AC220/400/41.5ATF	942041
2200A	NKA32H22-AN4-BC110TF	942125
2200A	NKA32H22-AN4-BC110ATF	942093
2200A	NKA32H22-AN4-BC220TF	942107
2200A	NKA32H22-AN4-BC220ATF	942124
2200A	NKA32H22-HF4-AC220/220/240TF	212981
2200A	NKA32H22-HF4-AC220/220/240ATF	212982
2200A	NKA32H22-HF4-AC220/400/41.5TF	212983
2200A	NKA32H22-HF4-AC220/400/41.5ATF	212984
2200A	NKA32H22-HF4-BC110TF	212985
2200A	NKA32H22-HF4-BC110ATF	212986
2200A	NKA32H22-HF4-BC220TF	212987
2200A	NKA32H22-HF4-BC220ATF	212988
2200A	NKA32H22-AN4-AC220/220/240TF	942105
2200A	NKA32H22-AN4-AC220/220/240ATF	942023
2200A	NKA32H22-AN4-AC220/400/41.5TF	942127
2200A	NKA32H22-AN4-AC220/400/41.5ATF	942085
2200A	NKA32H22-AN4-BC110TF	942129
2200A	NKA32H22-AN4-BC110ATF	942097
2200A	NKA32H22-AN4-BC220TF	942131
2200A	NKA32H22-AN4-BC220ATF	942129
2200A	NKA32H22-FF4-AC220/220/240TF	212949
2200A	NKA32H22-FF4-AC220/220/240ATF	212950
2200A	NKA32H22-FF4-AC220/400/41.5TF	212951
2200A	NKA32H22-FF4-AC220/400/41.5ATF	212952
2200A	NKA32H22-FF4-BC110TF	212953
2200A	NKA32H22-FF4-BC110ATF	212954
2200A	NKA32H22-FF4-BC220TF	212955
2200A	NKA32H22-FF4-BC220ATF	212956
1600A	NKA32H16-AN4-AC220/220/240TF	942103
1600A	NKA32H16-AN4-AC220/220/240ATF	942122

NKA-3200 Fixed 4P

Rated Current	Description	Code
1600A	NKA32 HI 6-AF4-AC280/300/415TF	942217
1600A	NKA32 HI 6-AF4-AC280/300/415MTF	942145
1600A	NKA32 HI 6-AF4-BC110TF	942269
1600A	NKA32 HI 6-AF4-BC110MTF	942197
1600A	NKA32 HI 6-AF4-BC220TF	942201
1600A	NKA32 HI 6-AF4-BC220MTF	942229
1600A	NKA32 HI 6-HF4-AC220/230/240TF	214047
1600A	NKA32 HI 6-HF4-AC220/230/240MTF	214048
1600A	NKA32 HI 6-HF4-AC280/300/415TF	214049
1600A	NKA32 HI 6-HF4-AC280/300/415MTF	214050
1600A	NKA32 HI 6-HF4-BC110TF	214051
1600A	NKA32 HI 6-HF4-BC110MTF	214052
1600A	NKA32 HI 6-HF4-BC220TF	214053
1600A	NKA32 HI 6-HF4-BC220MTF	214054
1600A	NKA32 HI 6-WF4-AC220/230/240TF	942209
1600A	NKA32 HI 6-WF4-AC220/230/240MTF	942127
1600A	NKA32 HI 6-WF4-AC280/300/415TF	942241
1600A	NKA32 HI 6-WF4-AC280/300/415MTF	942169
1600A	NKA32 HI 6-WF4-BC110TF	942273
1600A	NKA32 HI 6-WF4-BC110MTF	942201
1600A	NKA32 HI 6-WF4-BC220TF	942203
1600A	NKA32 HI 6-WF4-BC220MTF	942223
1600A	NKA32 HI 6-FF4-AC220/230/240TF	214013
1600A	NKA32 HI 6-FF4-AC220/230/240MTF	214014
1600A	NKA32 HI 6-FF4-AC280/300/415TF	214017
1600A	NKA32 HI 6-FF4-AC280/300/415MTF	214018
1600A	NKA32 HI 6-FF4-BC110TF	214019
1600A	NKA32 HI 6-FF4-BC110MTF	214020
1600A	NKA32 HI 6-FF4-BC220TF	214021
1600A	NKA32 HI 6-FF4-BC220MTF	214022
2000A	NKA32 W20-AF4-AC220/230/240TF	942213
2000A	NKA32 W20-AF4-AC220/230/240MTF	942141
2000A	NKA32 W20-AF4-AC280/300/415TF	942243
2000A	NKA32 W20-AF4-AC280/300/415MTF	942173
2000A	NKA32 W20-AF4-BC110TF	942277
2000A	NKA32 W20-AF4-BC110MTF	942205
2000A	NKA32 W20-AF4-BC220TF	942209
2000A	NKA32 W20-AF4-BC220MTF	942227
2000A	NKA32 W20-HF4-AC220/230/240TF	214111
2000A	NKA32 W20-HF4-AC220/230/240MTF	214112

NKA-3200 Fixed 4P

2000A	NKA32 W20-HF4-AC280/300/415TF	214113
2000A	NKA32 W20-HF4-AC280/300/415MTF	214114
2000A	NKA32 W20-HF4-BC110TF	214115
2000A	NKA32 W20-HF4-BC110MTF	214116
2000A	NKA32 W20-HF4-BC220TF	214117
2000A	NKA32 W20-HF4-BC220MTF	214118
2000A	NKA32 W20-WF4-AC220/230/240TF	942217
2000A	NKA32 W20-WF4-AC220/230/240MTF	942143
2000A	NKA32 W20-WF4-AC280/300/415TF	942249
2000A	NKA32 W20-WF4-AC280/300/415MTF	942177
2000A	NKA32 W20-WF4-BC110TF	942281
2000A	NKA32 W20-WF4-BC110MTF	942209
2000A	NKA32 W20-WF4-BC220TF	942213
2000A	NKA32 W20-WF4-BC220MTF	942241
2000A	NKA32 W20-FF4-AC220/230/240TF	214019
2000A	NKA32 W20-FF4-AC220/230/240MTF	214020
2000A	NKA32 W20-FF4-AC280/300/415TF	214021
2000A	NKA32 W20-FF4-AC280/300/415MTF	214022
2000A	NKA32 W20-FF4-BC110TF	214023
2000A	NKA32 W20-FF4-BC110MTF	214024
2000A	NKA32 W20-FF4-BC220TF	214025
2000A	NKA32 W20-FF4-BC220MTF	214026
2500A	NKA32 W25-AF4-AC220/230/240TF	942221
2500A	NKA32 W25-AF4-AC220/230/240MTF	942149
2500A	NKA32 W25-AF4-AC280/300/415TF	942253
2500A	NKA32 W25-AF4-AC280/300/415MTF	942181
2500A	NKA32 W25-AF4-BC110TF	942285
2500A	NKA32 W25-AF4-BC110MTF	942213
2500A	NKA32 W25-AF4-BC220TF	942217
2500A	NKA32 W25-AF4-BC220MTF	942245
2500A	NKA32 W25-HF4-AC220/230/240TF	214173
2500A	NKA32 W25-HF4-AC220/230/240MTF	214174
2500A	NKA32 W25-HF4-AC280/300/415TF	214177
2500A	NKA32 W25-HF4-AC280/300/415MTF	214178
2500A	NKA32 W25-HF4-BC110TF	214179
2500A	NKA32 W25-HF4-BC110MTF	214180
2500A	NKA32 W25-HF4-BC220TF	214181
2500A	NKA32 W25-HF4-BC220MTF	214182
2500A	NKA32 W25-WF4-AC220/230/240TF	942225
2500A	NKA32 W25-WF4-AC220/230/240MTF	942153

NKA-3200 Fixed 4P

Rated Current	Description	Code
2500A	NKA32 N23-WF3-AC230/400/41.5TF	942257
2500A	NKA32 N23-WF3-AC230/400/41.5WTF	942258
2500A	NKA32 N23-WF3-BC110TF	942259
2500A	NKA32 N23-WF3-BC110WTF	942267
2500A	NKA32 N23-WF3-BC220TF	942271
2500A	NKA32 N23-WF3-BC220WTF	942289
2500A	NKA32 N23-WF3-AC230/230/240TF	214243
2500A	NKA32 N23-WF3-AC230/230/240WTF	214244
2500A	NKA32 N23-WF3-AC230/400/41.5TF	214245
2500A	NKA32 N23-WF3-AC230/400/41.5WTF	214246
2500A	NKA32 N23-WF3-BC110TF	214247
2500A	NKA32 N23-WF3-BC110WTF	214248
2500A	NKA32 N23-WF3-BC220TF	214249
2500A	NKA32 N23-WF3-BC220WTF	214250
3200A	NKA32 N23-WF3-AC230/230/240TF	942269
3200A	NKA32 N23-WF3-AC230/230/240WTF	942277
3200A	NKA32 N23-WF3-AC230/400/41.5TF	942281
3200A	NKA32 N23-WF3-AC230/400/41.5WTF	942289
3200A	NKA32 N23-WF3-BC110TF	942293
3200A	NKA32 N23-WF3-BC110WTF	942297
3200A	NKA32 N23-WF3-BC220TF	942299
3200A	NKA32 N23-WF3-BC220WTF	942303
3200A	NKA32 N23-WF3-AC230/230/240TF	214259
3200A	NKA32 N23-WF3-AC230/230/240WTF	214260
3200A	NKA32 N23-WF3-AC230/400/41.5TF	214261
3200A	NKA32 N23-WF3-AC230/400/41.5WTF	214262
3200A	NKA32 N23-WF3-BC110TF	214263
3200A	NKA32 N23-WF3-BC110WTF	214264
3200A	NKA32 N23-WF3-BC220TF	214265
3200A	NKA32 N23-WF3-BC220WTF	214266
3200A	NKA32 N23-WF3-AC230/230/240TF	942273
3200A	NKA32 N23-WF3-AC230/230/240WTF	942281
3200A	NKA32 N23-WF3-AC230/400/41.5TF	942283
3200A	NKA32 N23-WF3-AC230/400/41.5WTF	942293
3200A	NKA32 N23-WF3-BC110TF	942297
3200A	NKA32 N23-WF3-BC110WTF	942299
3200A	NKA32 N23-WF3-BC220TF	942303
3200A	NKA32 N23-WF3-BC220WTF	942307
3200A	NKA32 N23-WF3-AC230/230/240TF	214267
3200A	NKA32 N23-WF3-AC230/230/240WTF	214268

NKA-3200 Fixed 4P

Rated Current	Description	Code
3200A	NKA32 N23-WF3-AC230/400/41.5TF	214269
3200A	NKA32 N23-WF3-AC230/400/41.5WTF	214270
3200A	NKA32 N23-WF3-BC110TF	214271
3200A	NKA32 N23-WF3-BC110WTF	214272
3200A	NKA32 N23-WF3-BC220TF	214273
3200A	NKA32 N23-WF3-BC220WTF	214274
1600A	NKA32 S13-WF3-AC230/230/240TF	103465
1600A	NKA32 S13-WF3-AC230/230/240WTF	193469
1600A	NKA32 S13-WF3-AC230/400/41.5TF	103466
1600A	NKA32 S13-WF3-AC230/400/41.5WTF	193470
1600A	NKA32 S13-WF3-AC230/230/240TF	214275
1600A	NKA32 S13-WF3-AC230/230/240WTF	214276
1600A	NKA32 S13-WF3-AC230/400/41.5TF	214277
1600A	NKA32 S13-WF3-AC230/400/41.5WTF	214278
1600A	NKA32 S13-WF3-AC230/230/240TF	103470
1600A	NKA32 S13-WF3-AC230/230/240WTF	193442
1600A	NKA32 S13-WF3-AC230/400/41.5TF	103482
1600A	NKA32 S13-WF3-AC230/400/41.5WTF	193474
1600A	NKA32 S13-WF3-AC230/230/240TF	214279
1600A	NKA32 S13-WF3-AC230/230/240WTF	214280
1600A	NKA32 S13-WF3-AC230/400/41.5TF	214281
1600A	NKA32 S13-WF3-AC230/400/41.5WTF	214282
3200A	NKA32 S20-WF3-AC230/230/240TF	103474
3200A	NKA32 S20-WF3-AC230/230/240WTF	193444
3200A	NKA32 S20-WF3-AC230/400/41.5TF	103484
3200A	NKA32 S20-WF3-AC230/400/41.5WTF	193476
3200A	NKA32 S20-WF3-AC230/230/240TF	214287
3200A	NKA32 S20-WF3-AC230/230/240WTF	214288
3200A	NKA32 S20-WF3-AC230/400/41.5TF	214289
3200A	NKA32 S20-WF3-AC230/400/41.5WTF	214290
3200A	NKA32 S20-WF3-AC230/230/240TF	103478
3200A	NKA32 S20-WF3-AC230/230/240WTF	193450
3200A	NKA32 S20-WF3-AC230/400/41.5TF	103480
3200A	NKA32 S20-WF3-AC230/400/41.5WTF	193482
3200A	NKA32 S20-WF3-AC230/230/240TF	214291
3200A	NKA32 S20-WF3-AC230/230/240WTF	214292
3200A	NKA32 S20-WF3-AC230/400/41.5TF	214293
3200A	NKA32 S20-WF3-AC230/400/41.5WTF	214294
2500A	NKA32 S23-WF3-AC230/230/240TF	103485
2500A	NKA32 S23-WF3-AC230/230/240WTF	193454

NKA-3200 Fixed 4P

Rated Current	Description	Code
2500A	NKA32503-AF4-AC380/400/415TF	108514
2500A	NKA32503-AF4-AC380/400/415WTF	193486
2500A	NKA32503-HF4-AC220/230/240TF	214039
2500A	NKA32503-HF4-AC220/230/240WTF	214040
2500A	NKA32503-HF4-AC380/400/415TF	214041
2500A	NKA32503-HF4-AC380/400/415WTF	214042
2500A	NKA32503-WF4-AC220/230/240TF	108586
2500A	NKA32503-WF4-AC220/230/240WTF	193488
2500A	NKA32503-WF4-AC380/400/415TF	108618
2500A	NKA32503-WF4-AC380/400/415WTF	193490
2500A	NKA32503-PF4-AC220/230/240TF	214022
2500A	NKA32503-PF4-AC220/230/240WTF	214024
2500A	NKA32503-PF4-AC380/400/415TF	214025
2500A	NKA32503-PF4-AC380/400/415WTF	214026
2500A	NKA32503-AF4-AC220/230/240TF	108590
2500A	NKA32503-AF4-AC220/230/240WTF	193487
2500A	NKA32503-AF4-AC380/400/415TF	108622
2500A	NKA32503-AF4-AC380/400/415WTF	193492
2500A	NKA32503-HF4-AC220/230/240TF	214071
2500A	NKA32503-HF4-AC220/230/240WTF	214072
2500A	NKA32503-HF4-AC380/400/415TF	214073
2500A	NKA32503-HF4-AC380/400/415WTF	214074
2500A	NKA32503-WF4-AC220/230/240TF	108594
2500A	NKA32503-WF4-AC220/230/240WTF	193485
2500A	NKA32503-WF4-AC380/400/415TF	108628
2500A	NKA32503-WF4-AC380/400/415WTF	193493
2500A	NKA32503-PF4-AC220/230/240TF	214033
2500A	NKA32503-PF4-AC220/230/240WTF	214035
2500A	NKA32503-PF4-AC380/400/415TF	214037
2500A	NKA32503-PF4-AC380/400/415WTF	214038

NKA-3200 Withdrawable 3P

1600A	NKA32163-AF3-AC220/230/240TF	942074
1600A	NKA32163-AF3-AC220/230/240WTF	214032
1600A	NKA32163-HF3-AC220/230/240WTF	942002
1600A	NKA32163-AF3-AC380/400/415TF	942006
1600A	NKA32163-AF3-AC380/400/415WTF	942034
1600A	NKA32163-AF3-BC110TF	942038
1600A	NKA32163-AF3-BC110WTF	942066
1600A	NKA32163-AF3-BC220TF	942070
1600A	NKA32163-AF3-BC220WTF	942098
1600A	NKA32163-HF3-AC220/230/240TF	214834
1600A	NKA32163-HF3-AC220/230/240WTF	214835
1600A	NKA32163-HF3-AC380/400/415TF	214836
1600A	NKA32163-HF3-AC380/400/415WTF	214838
1600A	NKA32163-HF3-BC110TF	214839
1600A	NKA32163-HF3-BC110WTF	214840
1600A	NKA32163-HF3-BC220TF	214841
1600A	NKA32163-HF3-BC220WTF	214842
1600A	NKA32163-WF3-AC220/230/240TF	942078
1600A	NKA32163-WF3-AC220/230/240WTF	214930
1600A	NKA32163-WF3-AC220/230/240WTF	942086
1600A	NKA32163-WF3-AC220/230/240WTF	214931
1600A	NKA32163-WF3-AC380/400/415TF	942079
1600A	NKA32163-WF3-AC380/400/415WTF	942088
1600A	NKA32163-WF3-BC110TF	942092
1600A	NKA32163-WF3-BC110WTF	942099
1600A	NKA32163-WF3-BC220TF	942074
1600A	NKA32163-WF3-BC220WTF	942082
1600A	NKA32163-PF3-AC220/230/240TF	214852
1600A	NKA32163-PF3-AC220/230/240WTF	214853
1600A	NKA32163-PF3-AC380/400/415TF	214854
1600A	NKA32163-PF3-AC380/400/415WTF	214855
1600A	NKA32163-PF3-BC110TF	214858
1600A	NKA32163-PF3-BC110WTF	214857
1600A	NKA32163-PF3-BC220TF	214858
1600A	NKA32163-PF3-BC220WTF	214859
2000A	NKA32160-AF3-AC220/230/240TF	942082
2000A	NKA32160-AF3-AC220/230/240WTF	214033
2000A	NKA32160-AF3-AC220/230/240WTF	942070
2000A	NKA32160-AF3-AC380/400/415TF	942074
2000A	NKA32160-AF3-AC380/400/415WTF	942072

NKA-3200 Withdrawable 3P

Rated Current	Description	Code
3000 A	NKA32 H30-AB3-BC110TF	942141
3000 A	NKA32 H30-AB3-BC110ATF	942074
3000 A	NKA32 H30-AB3-BC220TF	942178
3000 A	NKA32 H30-AB3-BC220ATF	942100
3000 A	NKA32 H30-HB3-AC220/230/240TF	212999
3000 A	NKA32 H30-HB3-AC220/230/240ATF	212900
3000 A	NKA32 H30-HB3-AC230/240/245TF	212901
3000 A	NKA32 H30-HB3-AC230/240/245ATF	212902
3000 A	NKA32 H30-HB3-BC110TF	212903
3000 A	NKA32 H30-HB3-BC110ATF	212904
3000 A	NKA32 H30-HB3-BC220TF	212905
3000 A	NKA32 H30-HB3-BC220ATF	212906
3000 A	NKA32 H30-AB3-AC230/240/240TF	942086
3000 A	NKA32 H30-AB3-AC230/240/240-3P11NTH	212952
3000 A	NKA32 H30-AB3-AC230/240/240ATF	942014
3000 A	NKA32 H30-AB3-AC230/240/240A-3P11NTH	212953
3000 A	NKA32 H30-AB3-AC230/240/245TF	942178
3000 A	NKA32 H30-AB3-AC230/240/245ATF	942046
3000 A	NKA32 H30-AB3-BC110TF	942130
3000 A	NKA32 H30-AB3-BC110ATF	942078
3000 A	NKA32 H30-AB3-BC220TF	942182
3000 A	NKA32 H30-AB3-BC220ATF	942170
3000 A	NKA32 H30-HB3-AC230/240/240TF	212867
3000 A	NKA32 H30-HB3-AC230/240/240ATF	212868
3000 A	NKA32 H30-HB3-AC230/240/245TF	212869
3000 A	NKA32 H30-HB3-AC230/240/245ATF	212870
3000 A	NKA32 H30-HB3-BC110TF	212871
3000 A	NKA32 H30-HB3-BC110ATF	212872
3000 A	NKA32 H30-HB3-BC220TF	212873
3000 A	NKA32 H30-HB3-BC220ATF	212874
2500 A	NKA32 H25-AB3-AC230/240/240TF	942090
2500 A	NKA32 H25-AB3-AC230/240/240-3P11NTH	212954
2500 A	NKA32 H25-AB3-AC230/240/240ATF	942018
2500 A	NKA32 H25-AB3-AC230/240/245TF	942122
2500 A	NKA32 H25-AB3-AC230/240/245ATF	942030
2500 A	NKA32 H25-AB3-BC110TF	942134
2500 A	NKA32 H25-AB3-BC110ATF	942082
2500 A	NKA32 H25-AB3-BC220TF	942186
2500 A	NKA32 H25-AB3-BC220ATF	942174
2500 A	NKA32 H25-HB3-AC230/240/240TF	212980

NKA-3200 Withdrawable 3P

2500 A	NKA32 H25-HB3-AC230/240/240-3P11NTH	212976
2500 A	NKA32 H25-HB3-AC230/240/240ATF	212984
2500 A	NKA32 H25-HB3-AC230/240/245TF	212985
2500 A	NKA32 H25-HB3-AC230/240/245ATF	212986
2500 A	NKA32 H25-HB3-BC110TF	212987
2500 A	NKA32 H25-HB3-BC110ATF	212988
2500 A	NKA32 H25-HB3-BC220TF	212989
2500 A	NKA32 H25-HB3-BC220ATF	212990
2500 A	NKA32 H25-AB3-AC230/240/240TF	942094
2500 A	NKA32 H25-AB3-AC230/240/240-3P11NTH	212984
2500 A	NKA32 H25-AB3-AC230/240/240ATF	942022
2500 A	NKA32 H25-AB3-AC230/240/240A-3P11NTH	212985
2500 A	NKA32 H25-AB3-AC230/240/245TF	942126
2500 A	NKA32 H25-AB3-AC230/240/245ATF	942034
2500 A	NKA32 H25-AB3-BC110TF	942138
2500 A	NKA32 H25-AB3-BC110ATF	942086
2500 A	NKA32 H25-AB3-BC220TF	942190
2500 A	NKA32 H25-AB3-BC220ATF	942178
2500 A	NKA32 H25-HB3-AC230/240/240TF	212991
2500 A	NKA32 H25-HB3-AC230/240/240ATF	212992
2500 A	NKA32 H25-HB3-AC230/240/245TF	212993
2500 A	NKA32 H25-HB3-AC230/240/245ATF	212994
2500 A	NKA32 H25-HB3-BC110TF	212995
2500 A	NKA32 H25-HB3-BC110ATF	212996
2500 A	NKA32 H25-HB3-BC220TF	212997
2500 A	NKA32 H25-HB3-BC220ATF	212998
2000 A	NKA32 H20-AB3-AC230/240/240TF	942098
2000 A	NKA32 H20-AB3-AC230/240/240-3P11NTH	212955
2000 A	NKA32 H20-AB3-AC230/240/240ATF	942026
2000 A	NKA32 H20-AB3-AC230/240/245TF	942130
2000 A	NKA32 H20-AB3-AC230/240/245ATF	942038
2000 A	NKA32 H20-AB3-BC110TF	942162
2000 A	NKA32 H20-AB3-BC110ATF	942090
2000 A	NKA32 H20-AB3-BC220TF	942194
2000 A	NKA32 H20-AB3-BC220ATF	942182
2000 A	NKA32 H20-HB3-AC230/240/240TF	212997
2000 A	NKA32 H20-HB3-AC230/240/240-3P11NTH	212976
2000 A	NKA32 H20-HB3-AC230/240/240ATF	212998
2000 A	NKA32 H20-HB3-AC230/240/245TF	212999
2000 A	NKA32 H20-HB3-AC230/240/245ATF	212980

NKA-3200 Withdrawable 3P

Rated Current	Description	Code
3200A	NKA32 H32-HB3-BC110TF	913988
3200A	NKA32 H32-HB3-BC110WTF	913989
3200A	NKA32 H32-HB3-BC220TF	913990
3200A	NKA32 H32-HB3-BC220WTF	913991
3200A	NKA32 H32-WB3-AC230/230/240TF	942187
3200A	NKA32 H32-WB3-AC230/230/240-3P11WTF	913993
3200A	NKA32 H32-WB3-AC230/230/240WTF	943000
3200A	NKA32 H32-WB3-AC230/230/240W-3P11WTF	913994
3200A	NKA32 H32-WB3-AC230/400/415TF	942188
3200A	NKA32 H32-WB3-AC230/400/415WTF	943002
3200A	NKA32 H32-WB3-BC110TF	942189
3200A	NKA32 H32-WB3-BC110WTF	943004
3200A	NKA32 H32-WB3-BC220TF	942190
3200A	NKA32 H32-WB3-BC220WTF	943138
3200A	NKA32 H32-FB3-AC230/230/240TF	913995
3200A	NKA32 H32-FB3-AC230/230/240WTF	913996
3200A	NKA32 H32-FB3-AC230/400/415TF	913997
3200A	NKA32 H32-FB3-AC230/400/415WTF	913998
3200A	NKA32 H32-FB3-BC110TF	913999
3200A	NKA32 H32-FB3-BC110WTF	913990
3200A	NKA32 H32-FB3-BC220TF	913991
3200A	NKA32 H32-FB3-BC220WTF	913992
1600A	NKA32 H16-AB3-AC230/230/240TF	942207
1600A	NKA32 H16-AB3-AC230/230/240WTF	942130
1600A	NKA32 H16-AB3-AC230/400/415TF	942208
1600A	NKA32 H16-AB3-AC230/400/415WTF	942182
1600A	NKA32 H16-AB3-BC110TF	942209
1600A	NKA32 H16-AB3-BC110WTF	942194
1600A	NKA32 H16-AB3-BC220TF	942210
1600A	NKA32 H16-AB3-BC220WTF	942216
1600A	NKA32 H16-HB3-AC230/230/240TF	914020
1600A	NKA32 H16-HB3-AC230/230/240WTF	914021
1600A	NKA32 H16-HB3-AC230/400/415TF	914022
1600A	NKA32 H16-HB3-AC230/400/415WTF	914023
1600A	NKA32 H16-HB3-BC110TF	914024
1600A	NKA32 H16-HB3-BC110WTF	914025
1600A	NKA32 H16-HB3-BC220TF	914026
1600A	NKA32 H16-HB3-BC220WTF	914027
1600A	NKA32 H16-WB3-AC230/230/240TF	942205
1600A	NKA32 H16-WB3-AC230/230/240-3P11WTF	913992

NKA-3200 Withdrawable 3P

Rated Current	Description	Code
1600A	NKA32 H16-WB3-AC230/230/240WTF	942194
1600A	NKA32 H16-WB3-AC230/230/240W-3P11WTF	913999
1600A	NKA32 H16-WB3-AC230/400/415TF	942208
1600A	NKA32 H16-WB3-AC230/400/415WTF	942186
1600A	NKA32 H16-WB3-BC110TF	942210
1600A	NKA32 H16-WB3-BC110WTF	942198
1600A	NKA32 H16-WB3-BC220TF	942202
1600A	NKA32 H16-WB3-BC220WTF	942200
1600A	NKA32 H16-FB3-AC230/230/240TF	913989
1600A	NKA32 H16-FB3-AC230/230/240WTF	913990
1600A	NKA32 H16-FB3-AC230/400/415TF	913991
1600A	NKA32 H16-FB3-AC230/400/415WTF	913992
1600A	NKA32 H16-FB3-BC110TF	913993
1600A	NKA32 H16-FB3-BC110WTF	913994
1600A	NKA32 H16-FB3-BC220TF	913995
1600A	NKA32 H16-FB3-BC220WTF	913996
3200A	NKA32 H20-AB3-AC230/230/240TF	942210
3200A	NKA32 H20-AB3-AC230/230/240WTF	942139
3200A	NKA32 H20-AB3-AC230/400/415TF	942212
3200A	NKA32 H20-AB3-AC230/400/415WTF	942190
3200A	NKA32 H20-AB3-BC110TF	942214
3200A	NKA32 H20-AB3-BC110WTF	942203
3200A	NKA32 H20-AB3-BC220TF	942216
3200A	NKA32 H20-AB3-BC220WTF	942214
3200A	NKA32 H20-HB3-AC230/230/240TF	914027
3200A	NKA32 H20-HB3-AC230/230/240WTF	914028
3200A	NKA32 H20-HB3-AC230/400/415TF	914029
3200A	NKA32 H20-HB3-AC230/400/415WTF	914030
3200A	NKA32 H20-HB3-BC110TF	914031
3200A	NKA32 H20-HB3-BC110WTF	914032
3200A	NKA32 H20-HB3-BC220TF	914033
3200A	NKA32 H20-HB3-BC220WTF	914034
3200A	NKA32 H20-WB3-AC230/230/240TF	942213
3200A	NKA32 H20-WB3-AC230/230/240-3P11WTF	913990
3200A	NKA32 H20-WB3-AC230/400/415TF	942215
3200A	NKA32 H20-WB3-AC230/400/415WTF	942193
3200A	NKA32 H20-WB3-BC110TF	942217
3200A	NKA32 H20-WB3-BC110WTF	942206

NKA-3200 Withdrawable 3P

Rated Current	Description	Code
2000A	NKA32 W20-4A BD-BC220TF	942210
2000A	NKA32 W20-4A BD-BC220MTF	942228
2000A	NKA32 W20-F BD-AC220/230/240TF	214033
2000A	NKA32 W20-F BD-AC220/230/240MTF	214034
2000A	NKA32 W20-F BD-AC220/400/415TF	214037
2000A	NKA32 W20-F BD-AC220/400/415MTF	214038
2000A	NKA32 W20-F BD-BC110TF	214039
2000A	NKA32 W20-F BD-BC110MTF	214040
2000A	NKA32 W20-F BD-BC220TF	214041
2000A	NKA32 W20-F BD-BC220MTF	214042
2500A	NKA32 W25-A BD-AC220/230/240TF	942218
2500A	NKA32 W25-A BD-AC220/230/240-3P11MTF	303320
2500A	NKA32 W25-A BD-AC220/230/240MTF	942145
2500A	NKA32 W25-A BD-AC220/400/415TF	942230
2500A	NKA32 W25-A BD-AC220/400/415MTF	942148
2500A	NKA32 W25-A BD-BC110TF	942232
2500A	NKA32 W25-A BD-BC110MTF	942210
2500A	NKA32 W25-A BD-BC220TF	942214
2500A	NKA32 W25-A BD-BC220MTF	942232
2500A	NKA32 W25-H BD3-AC220/230/240TF	214131
2500A	NKA32 W25-H BD3-AC220/230/240MTF	214132
2500A	NKA32 W25-H BD3-AC220/400/415TF	214133
2500A	NKA32 W25-H BD3-AC220/400/415MTF	214134
2500A	NKA32 W25-H BD3-BC110TF	214135
2500A	NKA32 W25-H BD3-BC110MTF	214136
2500A	NKA32 W25-H BD3-BC220TF	214137
2500A	NKA32 W25-H BD3-BC220MTF	214138
2500A	NKA32 W25-4A BD-AC220/230/240TF	942232
2500A	NKA32 W25-4A BD-AC220/230/240-3P11MTF	213982
2500A	NKA32 W25-4A BD-AC220/230/240MTF	942130
2500A	NKA32 W25-4A BD-AC220/230/240A-3P11MTF	213983
2500A	NKA32 W25-4A BD-AC220/400/415TF	942233
2500A	NKA32 W25-4A BD-AC220/400/415MTF	942132
2500A	NKA32 W25-4A BD-BC110TF	942236
2500A	NKA32 W25-4A BD-BC110MTF	942214
2500A	NKA32 W25-4A BD-BC220TF	942218
2500A	NKA32 W25-4A BD-BC220MTF	942245
2500A	NKA32 W25-F BD-AC220/230/240TF	214119
2500A	NKA32 W25-F BD-AC220/230/240MTF	214120
2500A	NKA32 W25-F BD-AC220/400/415TF	214121

NKA-3200 Withdrawable 3P

Rated Current	Description	Code
2500A	NKA32 W25-F BD3-AC220/400/415MTF	214122
2500A	NKA32 W25-F BD3-BC110TF	214123
2500A	NKA32 W25-F BD3-BC110MTF	214124
2500A	NKA32 W25-F BD3-BC220TF	214125
2500A	NKA32 W25-F BD3-BC220MTF	214126
3200A	NKA32 W32-A BD-AC220/230/240TF	942238
3200A	NKA32 W32-A BD-AC220/230/240-3P11MTF	303320
3200A	NKA32 W32-A BD-AC220/230/240MTF	942134
3200A	NKA32 W32-A BD-AC220/400/415TF	942239
3200A	NKA32 W32-A BD-AC220/400/415MTF	942136
3200A	NKA32 W32-A BD-BC110TF	942290
3200A	NKA32 W32-A BD-BC110MTF	942218
3200A	NKA32 W32-A BD-BC220TF	942292
3200A	NKA32 W32-A BD-BC220MTF	942230
3200A	NKA32 W32-H BD3-AC220/230/240TF	214213
3200A	NKA32 W32-H BD3-AC220/230/240MTF	214214
3200A	NKA32 W32-H BD3-AC220/400/415TF	214217
3200A	NKA32 W32-H BD3-AC220/400/415MTF	214218
3200A	NKA32 W32-H BD3-BC110TF	214219
3200A	NKA32 W32-H BD3-BC110MTF	214220
3200A	NKA32 W32-H BD3-BC220TF	214221
3200A	NKA32 W32-H BD3-BC220MTF	214222
3200A	NKA32 W32-M BD3-AC220/230/240TF	942230
3200A	NKA32 W32-M BD3-AC220/230/240-3P11MTF	213984
3200A	NKA32 W32-M BD3-AC220/230/240MTF	942133
3200A	NKA32 W32-M BD3-AC220/230/240A-3P11MTF	213985
3200A	NKA32 W32-M BD3-AC220/400/415TF	942232
3200A	NKA32 W32-M BD3-AC220/400/415MTF	942190
3200A	NKA32 W32-M BD3-BC110TF	942294
3200A	NKA32 W32-M BD3-BC110MTF	942292
3200A	NKA32 W32-M BD3-BC220TF	942296
3200A	NKA32 W32-M BD3-BC220MTF	942234
3200A	NKA32 W32-F BD3-AC220/230/240TF	214139
3200A	NKA32 W32-F BD3-AC220/230/240MTF	214134
3200A	NKA32 W32-F BD3-AC220/400/415TF	214135
3200A	NKA32 W32-F BD3-AC220/400/415MTF	214136
3200A	NKA32 W32-F BD3-BC110TF	214137
3200A	NKA32 W32-F BD3-BC110MTF	214138
3200A	NKA32 W32-F BD3-BC220TF	214139
3200A	NKA32 W32-F BD3-BC220MTF	214190

NKA-3200 Withdrawable 3P

Rated Current	Description	Code
1600A	NKA32S16-A BD-AC220/220/240TF	103363
1600A	NKA32S16-A BD-AC220/220/240MTF	193453
1600A	NKA32S16-A BD-AC230/400/415TF	103393
1600A	NKA32S16-A BD-AC230/400/415MTF	193483
1600A	NKA32S16-H BD-AC220/220/240TF	214263
1600A	NKA32S16-H BD-AC220/220/240MTF	214264
1600A	NKA32S16-H BD-AC230/400/415TF	214265
1600A	NKA32S16-H BD-AC230/400/415MTF	214266
1600A	NKA32S16-AH BD-AC220/220/240TF	103367
1600A	NKA32S16-AH BD-AC220/220/240-3P11MTF	214364
1600A	NKA32S16-AH BD-AC220/220/240MTF	193459
1600A	NKA32S16-AH BD-AC230/400/415TF	103399
1600A	NKA32S16-AH BD-AC230/400/415MTF	193489
1600A	NKA32S16-F BD-AC220/220/240TF	214267
1600A	NKA32S16-F BD-AC220/220/240MTF	214268
1600A	NKA32S16-F BD-AC230/400/415TF	214269
1600A	NKA32S16-F BD-AC230/400/415MTF	214270
2000A	NKA32S20-A BD-AC220/220/240TF	103371
2000A	NKA32S20-A BD-AC220/220/240MTF	193463
2000A	NKA32S20-A BD-AC230/400/415TF	103403
2000A	NKA32S20-A BD-AC230/400/415MTF	193493
2000A	NKA32S20-H BD-AC220/220/240TF	214273
2000A	NKA32S20-H BD-AC220/220/240MTF	214274
2000A	NKA32S20-H BD-AC230/400/415TF	214275
2000A	NKA32S20-H BD-AC230/400/415MTF	214276
2000A	NKA32S20-AH BD-AC220/220/240TF	103375
2000A	NKA32S20-AH BD-AC220/220/240-3P11MTF	214368
2000A	NKA32S20-AH BD-AC220/220/240MTF	193497
2000A	NKA32S20-AH BD-AC230/400/415TF	103407
2000A	NKA32S20-AH BD-AC230/400/415MTF	193497
2000A	NKA32S20-F BD-AC220/220/240TF	214279
2000A	NKA32S20-F BD-AC220/220/240MTF	214280
2000A	NKA32S20-F BD-AC230/400/415TF	214281
2000A	NKA32S20-F BD-AC230/400/415MTF	214282
2500A	NKA32S25-A BD-AC220/220/240TF	103379
2500A	NKA32S25-A BD-AC220/220/240MTF	193467
2500A	NKA32S25-A BD-AC230/400/415TF	103411
2500A	NKA32S25-A BD-AC230/400/415MTF	193487

NKA-3200 Withdrawable 3P

Rated Current	Description	Code
2500A	NKA32S25-H BD-AC220/220/240TF	214283
2500A	NKA32S25-H BD-AC220/220/240MTF	214284
2500A	NKA32S25-H BD-AC230/400/415TF	214289
2500A	NKA32S25-H BD-AC230/400/415MTF	214290
2500A	NKA32S25-AH BD-AC220/220/240TF	103383
2500A	NKA32S25-AH BD-AC220/220/240-3P11MTF	214370
2500A	NKA32S25-AH BD-AC220/220/240MTF	193455
2500A	NKA32S25-AH BD-AC220/220/240/400/415MTF	214371
2500A	NKA32S25-AH BD-AC230/400/415TF	103415
2500A	NKA32S25-AH BD-AC230/400/415MTF	193485
2500A	NKA32S25-F BD-AC220/220/240TF	214291
2500A	NKA32S25-F BD-AC220/220/240MTF	214292
2500A	NKA32S25-F BD-AC230/400/415TF	214293
2500A	NKA32S25-F BD-AC230/400/415MTF	214294
2500A	NKA32S25-A BD-AC220/220/240TF	103387
2500A	NKA32S25-A BD-AC220/220/240MTF	193459
2500A	NKA32S25-A BD-AC230/400/415TF	103419
2500A	NKA32S25-A BD-AC230/400/415MTF	193491
2500A	NKA32S25-H BD-AC220/220/240TF	214299
2500A	NKA32S25-H BD-AC220/220/240MTF	214300
2500A	NKA32S25-H BD-AC230/400/415TF	214301
2500A	NKA32S25-H BD-AC230/400/415MTF	214302
2500A	NKA32S25-AH BD-AC220/220/240TF	103397
2500A	NKA32S25-AH BD-AC220/220/240-3P11MTF	214372
2500A	NKA32S25-AH BD-AC220/220/240MTF	193463
2500A	NKA32S25-AH BD-AC220/220/240/400/415MTF	214373
2500A	NKA32S25-AH BD-AC230/400/415TF	103423
2500A	NKA32S25-AH BD-AC230/400/415MTF	193495
2500A	NKA32S25-F BD-AC220/220/240TF	214303
2500A	NKA32S25-F BD-AC220/220/240MTF	214304
2500A	NKA32S25-F BD-AC230/400/415TF	214305
2500A	NKA32S25-F BD-AC230/400/415MTF	214306

NKA-3200 Withdrawable 4P

Rated Current	Description	Code
1600A	NKA32H16-A BD-AC220/220/240TF	942076
1600A	NKA32H16-A BD-AC220/220/240MTF	942086
1600A	NKA32H16-A BD-AC230/400/415TF	942106
1600A	NKA32H16-A BD-AC230/400/415MTF	942026
1600A	NKA32H16-A BD-BC110TF	942140
1600A	NKA32H16-A BD-BC110MTF	942028
1600A	NKA32H16-A BD-BC230TF	942172
1600A	NKA32H16-A BD-BC230MTF	942100

NKA-3200 Withdrawable 4P

Rated Current	Description	Code
1600A	NKA32 H16-HB4-AC220/230/240TF	212843
1600A	NKA32 H16-HB4-AC220/230/240ATF	212844
1600A	NKA32 H16-HB4-AC380/400/415TF	212845
1600A	NKA32 H16-HB4-AC380/400/415ATF	212846
1600A	NKA32 H16-HB4-BC110TF	212847
1600A	NKA32 H16-HB4-BC110ATF	212848
1600A	NKA32 H16-HB4-BC220TF	212849
1600A	NKA32 H16-HB4-BC220ATF	212850
1600A	NKA32 H16-HB4-AC220/230/240TF	942080
1600A	NKA32 H16-HB4-AC220/230/240ATF	942081
1600A	NKA32 H16-HB4-AC380/400/415TF	942112
1600A	NKA32 H16-HB4-AC380/400/415ATF	942040
1600A	NKA32 H16-HB4-BC110TF	942144
1600A	NKA32 H16-HB4-BC110ATF	942072
1600A	NKA32 H16-HB4-BC220TF	942176
1600A	NKA32 H16-HB4-BC220ATF	942104
1600A	NKA32 H16-HB4-AC220/230/240TF	212850
1600A	NKA32 H16-HB4-AC220/230/240ATF	212851
1600A	NKA32 H16-HB4-AC380/400/415TF	212852
1600A	NKA32 H16-HB4-AC380/400/415ATF	212853
1600A	NKA32 H16-HB4-BC110TF	212854
1600A	NKA32 H16-HB4-BC110ATF	212855
1600A	NKA32 H16-HB4-BC220TF	212856
1600A	NKA32 H16-HB4-BC220ATF	212857
2000A	NKA32 H20-HB4-AC220/230/240TF	942084
2000A	NKA32 H20-HB4-AC220/230/240ATF	942112
2000A	NKA32 H20-HB4-AC380/400/415TF	942116
2000A	NKA32 H20-HB4-AC380/400/415ATF	942044
2000A	NKA32 H20-HB4-BC110TF	942148
2000A	NKA32 H20-HB4-BC110ATF	942076
2000A	NKA32 H20-HB4-BC220TF	942180
2000A	NKA32 H20-HB4-BC220ATF	942108
2000A	NKA32 H20-HB4-AC220/230/240TF	212900
2000A	NKA32 H20-HB4-AC220/230/240ATF	212903
2000A	NKA32 H20-HB4-AC380/400/415TF	212904
2000A	NKA32 H20-HB4-AC380/400/415ATF	212910
2000A	NKA32 H20-HB4-BC110TF	212911
2000A	NKA32 H20-HB4-BC110ATF	212912
2000A	NKA32 H20-HB4-BC220TF	212913
2000A	NKA32 H20-HB4-BC220ATF	212914

NKA-3200 Withdrawable 4P

2000A	NKA32 H20-HB4-AC220/230/240TF	942088
2000A	NKA32 H20-HB4-AC220/230/240ATF	942116
2000A	NKA32 H20-HB4-AC380/400/415TF	942120
2000A	NKA32 H20-HB4-AC380/400/415ATF	942048
2000A	NKA32 H20-HB4-BC110TF	942152
2000A	NKA32 H20-HB4-BC110ATF	942080
2000A	NKA32 H20-HB4-BC220TF	942184
2000A	NKA32 H20-HB4-BC220ATF	942112
2000A	NKA32 H20-HB4-AC220/230/240TF	212875
2000A	NKA32 H20-HB4-AC220/230/240ATF	212876
2000A	NKA32 H20-HB4-AC380/400/415TF	212877
2000A	NKA32 H20-HB4-AC380/400/415ATF	212878
2000A	NKA32 H20-HB4-BC110TF	212879
2000A	NKA32 H20-HB4-BC110ATF	212880
2000A	NKA32 H20-HB4-BC220TF	212881
2000A	NKA32 H20-HB4-BC220ATF	212882
2500A	NKA32 H25-HB4-AC220/230/240TF	942092
2500A	NKA32 H25-HB4-AC220/230/240ATF	942020
2500A	NKA32 H25-HB4-AC380/400/415TF	942124
2500A	NKA32 H25-HB4-AC380/400/415ATF	942052
2500A	NKA32 H25-HB4-BC110TF	942156
2500A	NKA32 H25-HB4-BC110ATF	942084
2500A	NKA32 H25-HB4-BC220TF	942188
2500A	NKA32 H25-HB4-BC220ATF	942116
2500A	NKA32 H25-HB4-AC220/230/240TF	212911
2500A	NKA32 H25-HB4-AC220/230/240ATF	212912
2500A	NKA32 H25-HB4-AC380/400/415TF	212913
2500A	NKA32 H25-HB4-AC380/400/415ATF	212914
2500A	NKA32 H25-HB4-BC110TF	212915
2500A	NKA32 H25-HB4-BC110ATF	212916
2500A	NKA32 H25-HB4-BC220TF	212917
2500A	NKA32 H25-HB4-BC220ATF	212918
2500A	NKA32 H25-HB4-AC220/230/240TF	942096
2500A	NKA32 H25-HB4-AC220/230/240ATF	942024
2500A	NKA32 H25-HB4-AC380/400/415TF	942128
2500A	NKA32 H25-HB4-AC380/400/415ATF	942056
2500A	NKA32 H25-HB4-BC110TF	942160
2500A	NKA32 H25-HB4-BC110ATF	942088
2500A	NKA32 H25-HB4-BC220TF	942192
2500A	NKA32 H25-HB4-BC220ATF	942120

NKA-3200 With rowable 4P

Rated Current	Description	Code
2500A	NKA32 H23-PB4-AC220/230/240TF	212939
2500A	NKA32 H23-PB4-AC220/230/240WTF	212940
2500A	NKA32 H23-PB4-AC280/300/315TF	212941
2500A	NKA32 H23-PB4-AC280/300/315WTF	212942
2500A	NKA32 H23-PB4-BC110TF	212943
2500A	NKA32 H23-PB4-BC110WTF	212944
2500A	NKA32 H23-PB4-BC220TF	212945
2500A	NKA32 H23-PB4-BC220WTF	212946
2200A	NKA32 H22-A B4-AC220/230/240TF	212100
2200A	NKA32 H22-A B4-AC220/230/240WTF	212028
2200A	NKA32 H22-A B4-AC280/300/315TF	212102
2200A	NKA32 H22-A B4-AC280/300/315WTF	212030
2200A	NKA32 H22-A B4-BC110TF	212104
2200A	NKA32 H22-A B4-BC110WTF	212032
2200A	NKA32 H22-A B4-BC220TF	212106
2200A	NKA32 H22-A B4-BC220WTF	212104
2200A	NKA32 H22-H B4-AC220/230/240TF	212963
2200A	NKA32 H22-H B4-AC220/230/240WTF	212968
2200A	NKA32 H22-H B4-AC280/300/315TF	212967
2200A	NKA32 H22-H B4-AC280/300/315WTF	212968
2200A	NKA32 H22-H B4-BC110TF	212969
2200A	NKA32 H22-H B4-BC110WTF	212970
2200A	NKA32 H22-H B4-BC220TF	212971
2200A	NKA32 H22-H B4-BC220WTF	212972
2200A	NKA32 H22-AB4-AC220/230/240TF	212104
2200A	NKA32 H22-AB4-AC220/230/240WTF	212032
2200A	NKA32 H22-AB4-AC280/300/315TF	212106
2200A	NKA32 H22-AB4-AC280/300/315WTF	212034
2200A	NKA32 H22-AB4-BC110TF	212108
2200A	NKA32 H22-AB4-BC110WTF	212036
2200A	NKA32 H22-AB4-BC220TF	212110
2200A	NKA32 H22-AB4-BC220WTF	212108
2200A	NKA32 H22-PB4-AC220/230/240TF	212925
2200A	NKA32 H22-PB4-AC220/230/240WTF	212926
2200A	NKA32 H22-PB4-AC280/300/315TF	212925
2200A	NKA32 H22-PB4-AC280/300/315WTF	212926
2200A	NKA32 H22-PB4-BC110TF	212927
2200A	NKA32 H22-PB4-BC110WTF	212928
2200A	NKA32 H22-PB4-BC220TF	212929
2200A	NKA32 H22-PB4-BC220WTF	212930

NKA-3200 With rowable 4P

Rated Current	Description	Code
1600A	NKA32 H16-A B4-AC220/230/240TF	212104
1600A	NKA32 H16-A B4-AC220/230/240WTF	212102
1600A	NKA32 H16-A B4-AC280/300/315TF	212106
1600A	NKA32 H16-A B4-AC280/300/315WTF	212104
1600A	NKA32 H16-A B4-BC110TF	212108
1600A	NKA32 H16-A B4-BC110WTF	212106
1600A	NKA32 H16-A B4-BC220TF	212100
1600A	NKA32 H16-A B4-BC220WTF	212108
1600A	NKA32 H16-H B4-AC220/230/240TF	214021
1600A	NKA32 H16-H B4-AC220/230/240WTF	214032
1600A	NKA32 H16-H B4-AC280/300/315TF	214023
1600A	NKA32 H16-H B4-AC280/300/315WTF	214034
1600A	NKA32 H16-H B4-BC110TF	214025
1600A	NKA32 H16-H B4-BC110WTF	214026
1600A	NKA32 H16-H B4-BC220TF	214027
1600A	NKA32 H16-H B4-BC220WTF	214028
1600A	NKA32 H16-AB4-AC220/230/240TF	212968
1600A	NKA32 H16-AB4-AC220/230/240WTF	212106
1600A	NKA32 H16-AB4-AC280/300/315TF	212969
1600A	NKA32 H16-AB4-AC280/300/315WTF	212108
1600A	NKA32 H16-AB4-BC110TF	212972
1600A	NKA32 H16-AB4-BC110WTF	212100
1600A	NKA32 H16-AB4-BC220TF	212974
1600A	NKA32 H16-AB4-BC220WTF	212102
1600A	NKA32 H16-PB4-AC220/230/240TF	212997
1600A	NKA32 H16-PB4-AC220/230/240WTF	212998
1600A	NKA32 H16-PB4-AC280/300/315TF	214001
1600A	NKA32 H16-PB4-AC280/300/315WTF	214002
1600A	NKA32 H16-PB4-BC110TF	214003
1600A	NKA32 H16-PB4-BC110WTF	214004
1600A	NKA32 H16-PB4-BC220TF	214005
1600A	NKA32 H16-PB4-BC220WTF	214006
2000A	NKA32 H20-A B4-AC220/230/240TF	212212
2000A	NKA32 H20-A B4-AC220/230/240WTF	212140
2000A	NKA32 H20-A B4-AC280/300/315TF	212234
2000A	NKA32 H20-A B4-AC280/300/315WTF	212172
2000A	NKA32 H20-A B4-BC110TF	212216
2000A	NKA32 H20-A B4-BC110WTF	212204
2000A	NKA32 H20-A B4-BC220TF	212208
2000A	NKA32 H20-A B4-BC220WTF	212206

NKA-3200 Withdrawable 4P

Rated Current	Description	Code
3000A	NKA32W20-HB4-AC220/230/240TP	214099
3000A	NKA32W20-HB4-AC220/230/240ATP	214099
3000A	NKA32W20-HB4-AC230/400/415TP	214099
3000A	NKA32W20-HB4-AC230/400/415ATP	214098
3000A	NKA32W20-HB4-BC110TP	214100
3000A	NKA32W20-HB4-BC110ATP	214100
3000A	NKA32W20-HB4-BC220TP	214101
3000A	NKA32W20-HB4-BC220ATP	214102
3000A	NKA32W20-WB4-AC220/230/240TP	942218
3000A	NKA32W20-WB4-AC220/230/240ATP	942144
3000A	NKA32W20-WB4-AC230/400/415TP	942248
3000A	NKA32W20-WB4-AC230/400/415ATP	942146
3000A	NKA32W20-WB4-BC110TP	942230
3000A	NKA32W20-WB4-BC110ATP	942208
3000A	NKA32W20-WB4-BC220TP	942212
3000A	NKA32W20-WB4-BC220ATP	942240
3000A	NKA32W20-FB4-AC220/230/240TP	214080
3000A	NKA32W20-FB4-AC220/230/240ATP	214084
3000A	NKA32W20-FB4-AC230/400/415TP	214085
3000A	NKA32W20-FB4-AC230/400/415ATP	214086
3000A	NKA32W20-FB4-BC110TP	214087
3000A	NKA32W20-FB4-BC110ATP	214088
3000A	NKA32W20-FB4-BC220TP	214089
3000A	NKA32W20-FB4-BC220ATP	214090
3200A	NKA32W25-A B4-AC220/230/240TP	942230
3200A	NKA32W25-A B4-AC220/230/240ATP	942148
3200A	NKA32W25-A B4-AC230/400/415TP	942232
3200A	NKA32W25-A B4-AC230/400/415ATP	942150
3200A	NKA32W25-A B4-BC110TP	942234
3200A	NKA32W25-A B4-BC110ATP	942212
3200A	NKA32W25-A B4-BC220TP	942216
3200A	NKA32W25-A B4-BC220ATP	942244
3200A	NKA32W25-H B4-AC220/230/240TP	214139
3200A	NKA32W25-H B4-AC220/230/240ATP	214140
3200A	NKA32W25-H B4-AC230/400/415TP	214141
3200A	NKA32W25-H B4-AC230/400/415ATP	214142
3200A	NKA32W25-H B4-BC110TP	214143
3200A	NKA32W25-H B4-BC110ATP	214144
3200A	NKA32W25-H B4-BC220TP	214145
3200A	NKA32W25-H B4-BC220ATP	214146

NKA-3200 Withdrawable 4P

Rated Current	Description	Code
3200A	NKA32W25-WB4-AC220/230/240TP	942238
3200A	NKA32W25-WB4-AC220/230/240ATP	942152
3200A	NKA32W25-WB4-AC230/400/415TP	942240
3200A	NKA32W25-WB4-AC230/400/415ATP	942154
3200A	NKA32W25-WB4-BC110TP	942236
3200A	NKA32W25-WB4-BC110ATP	942214
3200A	NKA32W25-WB4-BC220TP	942230
3200A	NKA32W25-WB4-BC220ATP	942248
3200A	NKA32W25-FB4-AC220/230/240TP	214137
3200A	NKA32W25-FB4-AC220/230/240ATP	214138
3200A	NKA32W25-FB4-AC230/400/415TP	214139
3200A	NKA32W25-FB4-AC230/400/415ATP	214140
3200A	NKA32W25-FB4-BC110TP	214141
3200A	NKA32W25-FB4-BC110ATP	214142
3200A	NKA32W25-FB4-BC220TP	214143
3200A	NKA32W25-FB4-BC220ATP	214144
3200A	NKA32W25-A B4-AC220/230/240TP	942230
3200A	NKA32W25-A B4-AC220/230/240ATP	942148
3200A	NKA32W25-A B4-AC230/400/415TP	942232
3200A	NKA32W25-A B4-AC230/400/415ATP	942150
3200A	NKA32W25-A B4-BC110TP	942234
3200A	NKA32W25-A B4-BC110ATP	942212
3200A	NKA32W25-A B4-BC220TP	942216
3200A	NKA32W25-A B4-BC220ATP	942244
3200A	NKA32W25-WB4-AC220/230/240TP	942238
3200A	NKA32W25-WB4-AC220/230/240ATP	942152
3200A	NKA32W25-WB4-AC230/400/415TP	942240
3200A	NKA32W25-WB4-AC230/400/415ATP	942154
3200A	NKA32W25-WB4-BC110TP	942236
3200A	NKA32W25-WB4-BC110ATP	942214
3200A	NKA32W25-WB4-BC220TP	942230
3200A	NKA32W25-WB4-BC220ATP	942248

NKA-3200 Withdrawable 4P

Rated Current	Description	Code
3200A	NKA32 H32-F B4-AC220/230/240TF	214191
3200A	NKA32 H32-F B4-AC220/230/240WTF	214192
3200A	NKA32 H32-F B4-AC380/400/415TF	214193
3200A	NKA32 H32-F B4-AC380/400/415WTF	214194
3200A	NKA32 H32-F B4-BC111TF	214195
3200A	NKA32 H32-F B4-BC111WTF	214196
3200A	NKA32 H32-F B4-BC220TF	214197
3200A	NKA32 H32-F B4-BC220WTF	214198
1600A	NKA32S16-A B4-AC220/230/240TF	108583
1600A	NKA32S16-A B4-AC220/230/240WTF	193400
1600A	NKA32S16-A B4-AC380/400/415TF	108587
1600A	NKA32S16-A B4-AC380/400/415WTF	193409
1600A	NKA32S16-H B4-AC220/230/240TF	214267
1600A	NKA32S16-H B4-AC220/230/240WTF	214268
1600A	NKA32S16-H B4-AC380/400/415TF	214269
1600A	NKA32S16-H B4-AC380/400/415WTF	214270
1600A	NKA32S16-W B4-AC220/230/240TF	108589
1600A	NKA32S16-W B4-AC220/230/240WTF	193441
1600A	NKA32S16-W B4-AC380/400/415TF	108591
1600A	NKA32S16-W B4-AC380/400/415WTF	193473
1600A	NKA32S16-F B4-AC220/230/240TF	214251
1600A	NKA32S16-F B4-AC220/230/240WTF	214252
1600A	NKA32S16-F B4-AC380/400/415TF	214253
1600A	NKA32S16-F B4-AC380/400/415WTF	214254
2000A	NKA32S20-A B4-AC220/230/240TF	108595
2000A	NKA32S20-A B4-AC220/230/240WTF	193443
2000A	NKA32S20-A B4-AC380/400/415TF	108597
2000A	NKA32S20-A B4-AC380/400/415WTF	193477
2000A	NKA32S20-H B4-AC220/230/240TF	214299
2000A	NKA32S20-H B4-AC220/230/240WTF	214300
2000A	NKA32S20-H B4-AC380/400/415TF	214301
2000A	NKA32S20-H B4-AC380/400/415WTF	214302
2000A	NKA32S20-W B4-AC220/230/240TF	108599
2000A	NKA32S20-W B4-AC220/230/240WTF	193445
2000A	NKA32S20-W B4-AC380/400/415TF	108603
2000A	NKA32S20-W B4-AC380/400/415WTF	193479
2000A	NKA32S20-F B4-AC220/230/240TF	214283
2000A	NKA32S20-F B4-AC220/230/240WTF	214284
2000A	NKA32S20-F B4-AC380/400/415TF	214285
2000A	NKA32S20-F B4-AC380/400/415WTF	214286

NKA-3200 Withdrawable 4P

Rated Current	Description	Code
2500A	NKA32S25-A B4-AC220/230/240TF	108581
2500A	NKA32S25-A B4-AC220/230/240WTF	193402
2500A	NKA32S25-A B4-AC380/400/415TF	108583
2500A	NKA32S25-A B4-AC380/400/415WTF	193403
2500A	NKA32S25-H B4-AC220/230/240TF	214301
2500A	NKA32S25-H B4-AC220/230/240WTF	214302
2500A	NKA32S25-H B4-AC380/400/415TF	214303
2500A	NKA32S25-H B4-AC380/400/415WTF	214304
2500A	NKA32S25-W B4-AC220/230/240TF	108585
2500A	NKA32S25-W B4-AC220/230/240WTF	193407
2500A	NKA32S25-W B4-AC380/400/415TF	108587
2500A	NKA32S25-W B4-AC380/400/415WTF	193409
2500A	NKA32S25-F B4-AC220/230/240TF	214312
2500A	NKA32S25-F B4-AC220/230/240WTF	214313
2500A	NKA32S25-F B4-AC380/400/415TF	214317
2500A	NKA32S25-F B4-AC380/400/415WTF	214318
3200A	NKA32S32-A B4-AC220/230/240TF	108589
3200A	NKA32S32-A B4-AC220/230/240WTF	193441
3200A	NKA32S32-A B4-AC380/400/415TF	108591
3200A	NKA32S32-A B4-AC380/400/415WTF	193473
3200A	NKA32S32-H B4-AC220/230/240TF	214283
3200A	NKA32S32-H B4-AC220/230/240WTF	214284
3200A	NKA32S32-H B4-AC380/400/415TF	214285
3200A	NKA32S32-H B4-AC380/400/415WTF	214286
3200A	NKA32S32-W B4-AC220/230/240TF	108593
3200A	NKA32S32-W B4-AC220/230/240WTF	193443
3200A	NKA32S32-W B4-AC380/400/415TF	108595
3200A	NKA32S32-W B4-AC380/400/415WTF	193445
3200A	NKA32S32-F B4-AC220/230/240TF	214347
3200A	NKA32S32-F B4-AC220/230/240WTF	214348
3200A	NKA32S32-F B4-AC380/400/415TF	214349
3200A	NKA32S32-F B4-AC380/400/415WTF	214350

NKA-4000 Fixed 3P

Rated Current	Description	Code
3200A	NKA40 RD3-AF3-AC220/230/240TF	937117
3200A	NKA40 RD3-AF3-AC220/230/240MTF	937103
3200A	NKA40 RD3-AF3-AC220/300/315TF	937118
3200A	NKA40 RD3-AF3-AC220/300/315MTF	937209
3200A	NKA40 RD3-AF3-DC110TF	937119
3200A	NKA40 RD3-AF3-DC110MTF	937233
3200A	NKA40 RD3-AF3-DC220TF	937120
3200A	NKA40 RD3-AF3-DC220MTF	937277
3200A	NKA40 RD3-RF3-AC220/230/240TF	214423
3200A	NKA40 RD3-RF3-AC220/230/240MTF	214424
3200A	NKA40 RD3-RF3-AC220/300/315TF	214425
3200A	NKA40 RD3-RF3-AC220/300/315MTF	214426
3200A	NKA40 RD3-RF3-DC110TF	214427
3200A	NKA40 RD3-RF3-DC110MTF	214428
3200A	NKA40 RD3-RF3-DC220TF	214429
3200A	NKA40 RD3-RF3-DC220MTF	214430
3200A	NKA40 RD3-AAF3-AC220/230/240TF	937123
3200A	NKA40 RD3-AAF3-AC220/230/240-3P1-NTF	214122
3200A	NKA40 RD3-AAF3-AC220/230/240MTF	937209
3200A	NKA40 RD3-AAF3-AC220/230/240-3P1-NTF	214123
3200A	NKA40 RD3-AAF3-AC220/300/315TF	937124
3200A	NKA40 RD3-AAF3-AC220/300/315MTF	937233
3200A	NKA40 RD3-AAF3-DC110TF	937125
3200A	NKA40 RD3-AAF3-DC110MTF	937237
3200A	NKA40 RD3-AAF3-DC220TF	937126
3200A	NKA40 RD3-AAF3-DC220MTF	937281
3200A	NKA40 RD3-FF3-AC220/230/240TF	214291
3200A	NKA40 RD3-FF3-AC220/230/240MTF	214292
3200A	NKA40 RD3-FF3-AC220/300/315TF	214293
3200A	NKA40 RD3-FF3-AC220/300/315MTF	214294
3200A	NKA40 RD3-FF3-DC110TF	214295
3200A	NKA40 RD3-FF3-DC110MTF	214296
3200A	NKA40 RD3-FF3-DC220TF	214297
3200A	NKA40 RD3-FF3-DC220MTF	214298
3600A	NKA40 RD3-AF3-AC220/230/240TF	937139
3600A	NKA40 RD3-AF3-AC220/230/240MTF	937213
3600A	NKA40 RD3-AF3-AC220/300/315TF	937130
3600A	NKA40 RD3-AF3-AC220/300/315MTF	937237
3600A	NKA40 RD3-AF3-DC110TF	937141

NKA-4000 Fixed 3P

Rated Current	Description	Code
3600A	NKA40 RD3-AF3-DC110MTF	937261
3600A	NKA40 RD3-AF3-DC220TF	937132
3600A	NKA40 RD3-AF3-DC220MTF	937285
3600A	NKA40 RD3-RF3-AC220/230/240TF	214437
3600A	NKA40 RD3-RF3-AC220/230/240MTF	214438
3600A	NKA40 RD3-RF3-AC220/300/315TF	214439
3600A	NKA40 RD3-RF3-AC220/300/315MTF	214440
3600A	NKA40 RD3-RF3-DC110TF	214491
3600A	NKA40 RD3-RF3-DC110MTF	214492
3600A	NKA40 RD3-RF3-DC220TF	214493
3600A	NKA40 RD3-RF3-DC220MTF	214494
3600A	NKA40 RD3-AAF3-AC220/230/240TF	937143
3600A	NKA40 RD3-AAF3-AC220/230/240-3P1-NTF	214124
3600A	NKA40 RD3-AAF3-AC220/230/240MTF	937217
3600A	NKA40 RD3-AAF3-AC220/230/240-3P1-NTF	214125
3600A	NKA40 RD3-AAF3-AC220/300/315TF	937146
3600A	NKA40 RD3-AAF3-AC220/300/315MTF	937241
3600A	NKA40 RD3-AAF3-DC110TF	937147
3600A	NKA40 RD3-AAF3-DC110MTF	937283
3600A	NKA40 RD3-AAF3-DC220TF	937148
3600A	NKA40 RD3-AAF3-DC220MTF	937289
3600A	NKA40 RD3-FF3-AC220/230/240TF	214435
3600A	NKA40 RD3-FF3-AC220/230/240MTF	214436
3600A	NKA40 RD3-FF3-AC220/300/315TF	214437
3600A	NKA40 RD3-FF3-AC220/300/315MTF	214438
3600A	NKA40 RD3-FF3-DC110TF	214439
3600A	NKA40 RD3-FF3-DC110MTF	214440
3600A	NKA40 RD3-FF3-DC220TF	214441
3600A	NKA40 RD3-FF3-DC220MTF	214442
4000A	NKA40 RD3-AF3-AC220/230/240TF	937141
4000A	NKA40 RD3-AF3-AC220/230/240MTF	937221
4000A	NKA40 RD3-AF3-AC220/300/315TF	937142
4000A	NKA40 RD3-AF3-AC220/300/315MTF	937243
4000A	NKA40 RD3-AF3-DC110TF	937143
4000A	NKA40 RD3-AF3-DC110MTF	937269
4000A	NKA40 RD3-AF3-DC220TF	937144
4000A	NKA40 RD3-AF3-DC220MTF	937293
4000A	NKA40 RD3-RF3-AC220/230/240TF	214443

NKA-4000 Fixed 3P

Rated Current	Description	Code
400A	NKA40 H40-HP3-AC220/400/415TF	212500
400A	NKA40 H40-HP3-AC220/400/415ANTF	212504
400A	NKA40 H40-HP3-BC110TF	212505
400A	NKA40 H40-HP3-BC110ANTF	212508
400A	NKA40 H40-HP3-BC220TF	212507
400A	NKA40 H40-HP3-BC220ANTF	212509
400A	NKA40 H40-AP3-AC220/400/415ANTF	942197
400A	NKA40 H40-AP3-AC220/400/40-3P1-NTF	214128
400A	NKA40 H40-AP3-AC220/400/40ANTF	942205
400A	NKA40 H40-AP3-AC220/400/40-3P1-NTF	214129
400A	NKA40 H40-AP3-AC220/400/415TF	942198
400A	NKA40 H40-AP3-AC220/400/415ANTF	942249
400A	NKA40 H40-AP3-BC110TF	942199
400A	NKA40 H40-AP3-BC110ANTF	942200
400A	NKA40 H40-AP3-BC220TF	942200
400A	NKA40 H40-AP3-BC220ANTF	942207
400A	NKA40 H40-HP3-AC220/400/415ANTF	214519
400A	NKA40 H40-HP3-AC220/400/415ANTF	214520
400A	NKA40 H40-HP3-AC220/400/415TF	214521
400A	NKA40 H40-HP3-AC220/400/415ANTF	214522
400A	NKA40 H40-HP3-BC110TF	214523
400A	NKA40 H40-HP3-BC110ANTF	214524
400A	NKA40 H40-HP3-BC220TF	214525
400A	NKA40 H40-HP3-BC220ANTF	212506
3200A	NKA40 H32-AP3-AC220/400/415ANTF	942201
3200A	NKA40 H32-AP3-AC220/400/415ANTF	942250
3200A	NKA40 H32-AP3-AC220/400/415TF	942255
3200A	NKA40 H32-AP3-AC220/400/415ANTF	942260
3200A	NKA40 H32-AP3-BC110TF	942270
3200A	NKA40 H32-AP3-BC110ANTF	942207
3200A	NKA40 H32-AP3-BC220TF	942400
3200A	NKA40 H32-AP3-BC220ANTF	942207
3200A	NKA40 H32-HP3-AC220/400/415ANTF	212595
3200A	NKA40 H32-HP3-AC220/400/415ANTF	212596
3200A	NKA40 H32-HP3-AC220/400/415TF	212597
3200A	NKA40 H32-HP3-AC220/400/415ANTF	212598
3200A	NKA40 H32-HP3-BC110TF	212599
3200A	NKA40 H32-HP3-BC110ANTF	212600
3200A	NKA40 H32-HP3-BC220TF	212601

NKA-4000 Fixed 3P

Rated Current	Description	Code
3200A	NKA40 H32-HP3-BC220ANTF	212602
3200A	NKA40 H32-AP3-AC220/400/415ANTF	942206
3200A	NKA40 H32-AP3-AC220/400/415ANTF	214128
3200A	NKA40 H32-AP3-AC220/400/415ANTF	942260
3200A	NKA40 H32-AP3-AC220/400/415ANTF	214129
3200A	NKA40 H32-AP3-AC220/400/415TF	942260
3200A	NKA40 H32-AP3-AC220/400/415ANTF	942267
3200A	NKA40 H32-AP3-BC110TF	942280
3200A	NKA40 H32-AP3-BC110ANTF	942211
3200A	NKA40 H32-AP3-BC220TF	942407
3200A	NKA40 H32-AP3-BC220ANTF	942225
3200A	NKA40 H32-HP3-AC220/400/415ANTF	212560
3200A	NKA40 H32-HP3-AC220/400/415ANTF	212564
3200A	NKA40 H32-HP3-AC220/400/415TF	212565
3200A	NKA40 H32-HP3-AC220/400/415ANTF	212566
3200A	NKA40 H32-HP3-BC110TF	212567
3200A	NKA40 H32-HP3-BC110ANTF	212568
3200A	NKA40 H32-HP3-BC220TF	212569
3200A	NKA40 H32-HP3-BC220ANTF	212570
3200A	NKA40 H32-AP3-AC220/400/415ANTF	942209
3200A	NKA40 H32-AP3-AC220/400/415ANTF	942267
3200A	NKA40 H32-AP3-AC220/400/415TF	942260
3200A	NKA40 H32-AP3-AC220/400/415ANTF	942291
3200A	NKA40 H32-AP3-BC110TF	942287
3200A	NKA40 H32-AP3-BC110ANTF	942215
3200A	NKA40 H32-AP3-BC220TF	942411
3200A	NKA40 H32-AP3-BC220ANTF	942209
3200A	NKA40 H32-HP3-AC220/400/415ANTF	212660
3200A	NKA40 H32-HP3-AC220/400/415TF	212661
3200A	NKA40 H32-HP3-AC220/400/415ANTF	212662
3200A	NKA40 H32-HP3-BC110TF	212660
3200A	NKA40 H32-HP3-BC110ANTF	212664
3200A	NKA40 H32-HP3-BC220TF	212665
3200A	NKA40 H32-HP3-BC220ANTF	212666
3200A	NKA40 H32-AP3-AC220/400/415ANTF	942260
3200A	NKA40 H32-AP3-AC220/400/415ANTF	214128
3200A	NKA40 H32-AP3-AC220/400/415ANTF	942271
3200A	NKA40 H32-AP3-AC220/400/415ANTF	214129

NKA-4000 Fixed 3P

Rated Current	Description	Code
2500A	NKA40 KDS-AN P3-AC230/400/415TF	942387
2500A	NKA40 KDS-AN P3-AC230/400/415ANT F	942390
2500A	NKA40 KDS-AN P3-BC 110TF	942391
2500A	NKA40 KDS-AN P3-BC 110ANT F	942399
2500A	NKA40 KDS-AN P3-BC 230TF	942413
2500A	NKA40 KDS-AN P3-BC 230ANT F	942380
2500A	NKA40 KDS-FF3-AC230/230/240TF	212827
2500A	NKA40 KDS-FF3-AC230/230/240ANT F	212828
2500A	NKA40 KDS-FF3-AC230/400/415TF	212829
2500A	NKA40 KDS-FF3-AC230/400/415ANT F	212830
2500A	NKA40 KDS-FF3-BC 110TF	212831
2500A	NKA40 KDS-FF3-BC 110ANT F	212832
2500A	NKA40 KDS-FF3-BC 230TF	212833
2500A	NKA40 KDS-FF3-BC 230ANT F	212834
4000A	NKA40 H40-AP3-AC230/230/240TF	942347
4000A	NKA40 H40-AP3-AC230/230/240-3P 1 NTF	208335
4000A	NKA40 H40-AP3-AC230/230/240ANT F	942345
4000A	NKA40 H40-AP3-AC230/400/415TF	942341
4000A	NKA40 H40-AP3-AC230/400/415ANT F	942399
4000A	NKA40 H40-AP3-BC 110TF	942395
4000A	NKA40 H40-AP3-BC 110ANT F	942392
4000A	NKA40 H40-AP3-BC 230TF	942419
4000A	NKA40 H40-AP3-BC 230ANT F	942347
4000A	NKA40 H40-HP3-AC 230/230/240TF	212720
4000A	NKA40 H40-HP3-AC 230/230/240ANT F	212724
4000A	NKA40 H40-HP3-AC230/400/415TF	212725
4000A	NKA40 H40-HP3-AC230/400/415ANT F	212728
4000A	NKA40 H40-HP3-BC 110TF	212727
4000A	NKA40 H40-HP3-BC 110ANT F	212728
4000A	NKA40 H40-HP3-BC230TF	212729
4000A	NKA40 H40-HP3-BC230ANT F	212730
4000A	NKA40 H40-AN P3-AC230/230/240TF	942337
4000A	NKA40 H40-AN P3-AC230/230/240-3P 1 NTF	214122
4000A	NKA40 H40-AN P3-AC230/230/240ANT F	942349
4000A	NKA40 H40-AN P3-AC230/230/240AN-3P 1 NTF	214120
4000A	NKA40 H40-AN P3-AC230/400/415TF	942343
4000A	NKA40 H40-AN P3-AC230/400/415ANT F	942300
4000A	NKA40 H40-AN P3-BC 110TF	942399
4000A	NKA40 H40-AN P3-BC 110ANT F	942397

NKA-4000 Fixed 3P

Rated Current	Description	Code
4000A	NKA40 H40-AP3-BC230TF	942423
4000A	NKA40 H40-AP3-BC230ANT F	942421
4000A	NKA40 H40-HP3-AC 230/230/240TF	212891
4000A	NKA40 H40-HP3-AC 230/230/240ANT F	212892
4000A	NKA40 H40-HP3-AC230/400/415TF	212893
4000A	NKA40 H40-HP3-AC230/400/415ANT F	212894
4000A	NKA40 H40-HP3-BC 110TF	212895
4000A	NKA40 H40-HP3-BC 110ANT F	212896
4000A	NKA40 H40-HP3-BC230TF	212897
4000A	NKA40 H40-HP3-BC230ANT F	212898
3200A	NKA40 S23-AP3-AC230/230/240TF	108628
3200A	NKA40 S23-AP3-AC230/230/240ANT F	192500
3200A	NKA40 S23-AP3-AC230/400/415TF	108632
3200A	NKA40 S23-AP3-AC230/400/415ANT F	192524
3200A	NKA40 S23-HP3-AC 230/230/240TF	212740
3200A	NKA40 S23-HP3-AC 230/230/240ANT F	212744
3200A	NKA40 S23-HP3-AC230/400/415TF	212745
3200A	NKA40 S23-HP3-AC230/400/415ANT F	212746
3200A	NKA40 S23-AP3-AC230/230/240TF	108632
3200A	NKA40 S23-AP3-AC230/230/240-3P 1 NTF	214138
3200A	NKA40 S23-AP3-AC230/230/240ANT F	192504
3200A	NKA40 S23-AP3-AC230/230/240AN-3P 1 NTF	214135
3200A	NKA40 S23-AP3-AC230/400/415TF	108636
3200A	NKA40 S23-AP3-AC230/400/415ANT F	192528
3200A	NKA40 S23-FF3-AC230/230/240TF	212747
3200A	NKA40 S23-FF3-AC230/230/240ANT F	212748
3200A	NKA40 S23-FF3-AC230/400/415TF	212749
3200A	NKA40 S23-FF3-AC230/400/415ANT F	212750
2500A	NKA40 S24-AP3-AC230/230/240TF	108636
2500A	NKA40 S24-AP3-AC230/230/240ANT F	192508
2500A	NKA40 S24-HP3-AC 230/230/240TF	212793
2500A	NKA40 S24-HP3-AC 230/230/240ANT F	212796
2500A	NKA40 S24-HP3-AC230/400/415TF	212797
2500A	NKA40 S24-HP3-AC230/400/415ANT F	212798
2500A	NKA40 S24-AP3-AC230/230/240TF	108640
2500A	NKA40 S24-AP3-AC230/230/240-3P 1 NTF	214136
2500A	NKA40 S24-AP3-AC230/230/240ANT F	192512

NKA-40H0 Fixed 3P

Rated Current	Description	Code
3200A	NKA40S38-AP3-AC220/230/240A-3P1-1HP	218137
3200A	NKA40S38-AP3-AC230/240/41.5TP	108554
3200A	NKA40S38-AP3-AC230/240/41.5ANTP	190338
3200A	NKA40S38-PP3-AC220/230/240TP	212779
3200A	NKA40S38-PP3-AC220/230/240ANTP	212780
3200A	NKA40S38-PP3-AC230/240/41.5TP	212781
3200A	NKA40S38-PP3-AC230/240/41.5ANTP	212782
4000A	NKA40S40-AP3-AC220/230/240TP	108544
4000A	NKA40S40-AP3-AC220/230/240ANTP	190314
4000A	NKA40S40-AP3-AC230/240/41.5TP	108558
4000A	NKA40S40-AP3-AC230/240/41.5ANTP	190340
4000A	NKA40S40-PP3-AC220/230/240TP	212827
4000A	NKA40S40-PP3-AC220/230/240ANTP	212828
4000A	NKA40S40-PP3-AC230/240/41.5TP	212829
4000A	NKA40S40-PP3-AC230/240/41.5ANTP	212830
4000A	NKA40S40-AP3-AC220/230/240TP	108538
4000A	NKA40S40-AP3-AC220/230/240-3P1-1HP	218138
4000A	NKA40S40-AP3-AC220/230/240ANTP	190320
4000A	NKA40S40-AP3-AC220/230/240A-3P1-1HP	218139
4000A	NKA40S40-AP3-AC230/240/41.5TP	108572
4000A	NKA40S40-AP3-AC230/240/41.5ANTP	190344
4000A	NKA40S40-PP3-AC220/230/240TP	212811
4000A	NKA40S40-PP3-AC220/230/240ANTP	212812
4000A	NKA40S40-PP3-AC230/240/41.5TP	212813
4000A	NKA40S40-PP3-AC230/240/41.5ANTP	212814

NKA-40H0 Fixed 4P

Rated Current	Description	Code
3200A	NKA40H23-AP4-AC220/230/240TP	957121
3200A	NKA40H23-AP4-AC220/230/240ANTP	957127
3200A	NKA40H23-AP4-AC230/240/41.5TP	957122
3200A	NKA40H23-AP4-AC230/240/41.5ANTP	957121
3200A	NKA40H23-AP4-DC110TP	957123
3200A	NKA40H23-AP4-DC110ANTP	957125
3200A	NKA40H23-AP4-DC220TP	957124
3200A	NKA40H23-AP4-DC220ANTP	957129
3200A	NKA40H23-PP4-AC220/230/240TP	214421
3200A	NKA40H23-PP4-AC220/230/240ANTP	214422
3200A	NKA40H23-PP4-AC230/240/41.5TP	214423
3200A	NKA40H23-PP4-AC230/240/41.5ANTP	214424
3200A	NKA40H23-PP4-DC110TP	214425
3200A	NKA40H23-PP4-DC110ANTP	214426

NKA-40H0 Fixed 4P

3200A	NKA40H23-HF4-DC220TP	214427
3200A	NKA40H23-HF4-DC220ANTP	214428
3200A	NKA40H23-HF4-AC220/230/240TP	957127
3200A	NKA40H23-HF4-AC220/230/240ANTP	957121
3200A	NKA40H23-HF4-AC230/240/41.5TP	957128
3200A	NKA40H23-HF4-AC230/240/41.5ANTP	957125
3200A	NKA40H23-HF4-DC110TP	957129
3200A	NKA40H23-HF4-DC110ANTP	957129
3200A	NKA40H23-HF4-DC220TP	957130
3200A	NKA40H23-HF4-DC220ANTP	957130
3200A	NKA40H23-FF4-AC220/230/240TP	214399
3200A	NKA40H23-FF4-AC220/230/240ANTP	214400
3200A	NKA40H23-FF4-AC230/240/41.5TP	214401
3200A	NKA40H23-FF4-AC230/240/41.5ANTP	214402
3200A	NKA40H23-FF4-DC110TP	214403
3200A	NKA40H23-FF4-DC110ANTP	214404
3200A	NKA40H23-FF4-DC220TP	214405
3200A	NKA40H23-FF4-DC220ANTP	214406
3200A	NKA40H26-AP4-AC220/230/240TP	957131
3200A	NKA40H26-AP4-AC220/230/240ANTP	957131
3200A	NKA40H26-AP4-AC230/240/41.5TP	957134
3200A	NKA40H26-AP4-AC230/240/41.5ANTP	957139
3200A	NKA40H26-AP4-DC110TP	957135
3200A	NKA40H26-AP4-DC110ANTP	957136
3200A	NKA40H26-AP4-DC220TP	957137
3200A	NKA40H26-HF4-AC220/230/240TP	214429
3200A	NKA40H26-HF4-AC220/230/240ANTP	214430
3200A	NKA40H26-HF4-AC230/240/41.5TP	214431
3200A	NKA40H26-HF4-AC230/240/41.5ANTP	214432
3200A	NKA40H26-HF4-DC110TP	214433
3200A	NKA40H26-HF4-DC110ANTP	214434
3200A	NKA40H26-HF4-DC220TP	214435
3200A	NKA40H26-HF4-DC220ANTP	214436
3200A	NKA40H26-HF4-DC220TP	214437
3200A	NKA40H26-HF4-DC220ANTP	214438
3200A	NKA40H26-HF4-AC220/230/240TP	957139
3200A	NKA40H26-HF4-AC220/230/240ANTP	957139
3200A	NKA40H26-HF4-AC230/240/41.5TP	957140
3200A	NKA40H26-HF4-AC230/240/41.5ANTP	957140
3200A	NKA40H26-HF4-DC110TP	957141

NKA-4000 Fixed 4P

Rated Current	Description	Code
3500A	NKA40 H4-AF4-BC110ATP	957267
3500A	NKA40 H4-AF4-BC220TP	957270
3500A	NKA40 H4-AF4-BC220ATP	957291
3500A	NKA40 H4-HF4-AC220/230/240TP	212320
3500A	NKA40 H4-HF4-AC220/230/240ATP	212324
3500A	NKA40 H4-HF4-AC230/400/415TP	212325
3500A	NKA40 H4-HF4-AC230/400/415ATP	212326
3500A	NKA40 H4-HF4-BC110TP	212327
3500A	NKA40 H4-HF4-BC110ATP	212328
3500A	NKA40 H4-HF4-BC220TP	212329
3500A	NKA40 H4-HF4-BC220ATP	212340
4000A	NKA40 H40-AF4-AC220/230/240TP	957184
4000A	NKA40 H40-AF4-AC220/230/240ATP	957223
4000A	NKA40 H40-AF4-AC230/400/415TP	957186
4000A	NKA40 H40-AF4-AC230/400/415ATP	957247
4000A	NKA40 H40-AF4-BC110TP	957187
4000A	NKA40 H40-AF4-BC110ATP	957271
4000A	NKA40 H40-AF4-BC220TP	957188
4000A	NKA40 H40-AF4-BC220ATP	957292
4000A	NKA40 H40-HF4-AC220/230/240TP	212329
4000A	NKA40 H40-HF4-AC220/230/240ATP	212340
4000A	NKA40 H40-HF4-AC230/400/415TP	212341
4000A	NKA40 H40-HF4-AC230/400/415ATP	212342
4000A	NKA40 H40-HF4-BC110TP	212343
4000A	NKA40 H40-HF4-BC110ATP	212344
4000A	NKA40 H40-HF4-BC220TP	212345
4000A	NKA40 H40-HF4-BC220ATP	212346
4000A	NKA40 H40-AF4-AC220/230/240TP	957201
4000A	NKA40 H40-AF4-AC220/230/240ATP	957227
4000A	NKA40 H40-AF4-AC230/400/415TP	957202
4000A	NKA40 H40-AF4-AC230/400/415ATP	957231
4000A	NKA40 H40-AF4-BC110TP	957203
4000A	NKA40 H40-AF4-BC110ATP	957273
4000A	NKA40 H40-AF4-BC220TP	957204
4000A	NKA40 H40-AF4-BC220ATP	957299
4000A	NKA40 H40-HF4-AC220/230/240TP	212307
4000A	NKA40 H40-HF4-AC220/230/240ATP	212308
4000A	NKA40 H40-HF4-AC230/400/415TP	212309
4000A	NKA40 H40-HF4-AC230/400/415ATP	212310

NKA-4000 Fixed 4P

Rated Current	Description	Code
4000A	NKA40 H40-HF4-BC110TP	212311
4000A	NKA40 H40-HF4-BC110ATP	212312
4000A	NKA40 H40-HF4-BC220TP	212313
4000A	NKA40 H40-HF4-BC220ATP	212314
3200A	NKA40 H32-AF4-AC220/230/240TP	942230
3200A	NKA40 H32-AF4-AC220/230/240ATP	942231
3200A	NKA40 H32-AF4-AC230/400/415TP	942237
3200A	NKA40 H32-AF4-AC230/400/415ATP	942238
3200A	NKA40 H32-AF4-BC110TP	942231
3200A	NKA40 H32-AF4-BC110ATP	942209
3200A	NKA40 H32-AF4-BC220TP	942403
3200A	NKA40 H32-AF4-BC220ATP	942220
3200A	NKA40 H32-HF4-AC220/230/240TP	212300
3200A	NKA40 H32-HF4-AC220/230/240ATP	212303
3200A	NKA40 H32-HF4-AC230/400/415TP	212305
3200A	NKA40 H32-HF4-AC230/400/415ATP	212306
3200A	NKA40 H32-HF4-BC110TP	212307
3200A	NKA40 H32-HF4-BC110ATP	212308
3200A	NKA40 H32-HF4-BC220TP	212309
3200A	NKA40 H32-HF4-BC220ATP	212310
3200A	NKA40 H32-AF4-AC220/230/240TP	942237
3200A	NKA40 H32-AF4-AC220/230/240ATP	942245
3200A	NKA40 H32-AF4-AC230/400/415TP	942241
3200A	NKA40 H32-AF4-AC230/400/415ATP	942239
3200A	NKA40 H32-AF4-BC110TP	942235
3200A	NKA40 H32-AF4-BC110ATP	942213
3200A	NKA40 H32-AF4-BC220TP	942409
3200A	NKA40 H32-AF4-BC220ATP	942237
3200A	NKA40 H32-HF4-AC220/230/240TP	212371
3200A	NKA40 H32-HF4-AC220/230/240ATP	212372
3200A	NKA40 H32-HF4-AC230/400/415TP	212373
3200A	NKA40 H32-HF4-AC230/400/415ATP	212374
3200A	NKA40 H32-HF4-BC110TP	212375
3200A	NKA40 H32-HF4-BC110ATP	212376
3200A	NKA40 H32-HF4-BC220TP	212377
3200A	NKA40 H32-HF4-BC220ATP	212378
2500A	NKA40 H25-AF4-AC220/230/240TP	942241
2500A	NKA40 H25-AF4-AC220/230/240ATP	942239
2500A	NKA40 H25-AF4-AC230/400/415TP	942245

NKA-4000 Fixed 4P

Rated Current	Description	Code
3500A	NKA4000S-AF4-AC230/400/41.5ATP	942299
3500A	NKA4000S-AF4-DC110TP	942299
3500A	NKA4000S-AF4-DC110ATP	942311
3500A	NKA4000S-AF4-DC220TP	942413
3500A	NKA4000S-AF4-DC220ATP	942391
3500A	NKA4000S-HF4-AC230/230/240TP	212667
3500A	NKA4000S-HF4-AC230/230/240ATP	212689
3500A	NKA4000S-HF4-AC230/400/41.5TP	212689
3500A	NKA4000S-HF4-AC230/400/41.5ATP	212670
3500A	NKA4000S-HF4-DC110TP	212671
3500A	NKA4000S-HF4-DC110ATP	212672
3500A	NKA4000S-HF4-DC220TP	212673
3500A	NKA4000S-HF4-DC220ATP	212674
3500A	NKA4000S-WF4-AC230/230/240TP	942345
3500A	NKA4000S-WF4-AC230/230/240ATP	942345
3500A	NKA4000S-WF4-AC230/400/41.5TP	942389
3500A	NKA4000S-WF4-AC230/400/41.5ATP	942397
3500A	NKA4000S-WF4-DC110TP	942399
3500A	NKA4000S-WF4-DC110ATP	942321
3500A	NKA4000S-WF4-DC220TP	942411
3500A	NKA4000S-WF4-DC220ATP	942345
3500A	NKA4000S-PF4-AC230/230/240TP	212625
3500A	NKA4000S-PF4-AC230/230/240ATP	212626
3500A	NKA4000S-PF4-AC230/400/41.5TP	212637
3500A	NKA4000S-PF4-AC230/400/41.5ATP	212638
3500A	NKA4000S-PF4-DC110TP	212629
3500A	NKA4000S-PF4-DC110ATP	212640
3500A	NKA4000S-PF4-DC220TP	212641
3500A	NKA4000S-PF4-DC220ATP	212642
4000A	NKA40000-AF4-AC230/230/240TP	942349
4000A	NKA40000-AF4-AC230/230/240ATP	942377
4000A	NKA40000-AF4-AC230/400/41.5TP	942378
4000A	NKA40000-AF4-AC230/400/41.5ATP	942301
4000A	NKA40000-AF4-DC110TP	942397
4000A	NKA40000-AF4-DC110ATP	942325
4000A	NKA40000-AF4-DC220TP	942431
4000A	NKA40000-AF4-DC220ATP	942349
4000A	NKA40000-HF4-AC230/230/240TP	212731
4000A	NKA40000-HF4-AC230/230/240ATP	212732

NKA-4000 Fixed 4P

Rated Current	Description	Code
4000A	NKA40000-HF4-AC230/400/41.5TP	212733
4000A	NKA40000-HF4-AC230/400/41.5ATP	212734
4000A	NKA40000-HF4-DC110TP	212725
4000A	NKA40000-HF4-DC110ATP	212726
4000A	NKA40000-HF4-DC220TP	212737
4000A	NKA40000-HF4-DC220ATP	212738
4000A	NKA40000-WF4-AC230/230/240TP	942349
4000A	NKA40000-WF4-AC230/230/240ATP	942381
4000A	NKA40000-WF4-AC230/400/41.5TP	942377
4000A	NKA40000-WF4-AC230/400/41.5ATP	942305
4000A	NKA40000-WF4-DC110TP	942481
4000A	NKA40000-WF4-DC110ATP	942399
4000A	NKA40000-WF4-DC220TP	942425
4000A	NKA40000-WF4-DC220ATP	942349
4000A	NKA40000-PF4-AC230/230/240TP	212699
4000A	NKA40000-PF4-AC230/230/240ATP	212700
4000A	NKA40000-PF4-AC230/400/41.5TP	212701
4000A	NKA40000-PF4-AC230/400/41.5ATP	212702
4000A	NKA40000-PF4-DC110TP	212703
4000A	NKA40000-PF4-DC110ATP	212704
4000A	NKA40000-PF4-DC220TP	212705
4000A	NKA40000-PF4-DC220ATP	212706
3200A	NKA40323-AF4-AC230/230/240TP	103620
3200A	NKA40323-AF4-AC230/230/240ATP	103607
3200A	NKA40323-AF4-AC230/400/41.5TP	103654
3200A	NKA40323-AF4-AC230/400/41.5ATP	103655
3200A	NKA40323-HF4-AC230/230/240TP	212787
3200A	NKA40323-HF4-AC230/230/240ATP	212788
3200A	NKA40323-HF4-AC230/400/41.5TP	212789
3200A	NKA40323-HF4-AC230/400/41.5ATP	212790
3200A	NKA40323-WF4-AC230/230/240TP	103624
3200A	NKA40323-WF4-AC230/230/240ATP	103608
3200A	NKA40323-WF4-AC230/400/41.5TP	103658
3200A	NKA40323-WF4-AC230/400/41.5ATP	103620
3200A	NKA40323-PF4-AC230/230/240TP	212791
3200A	NKA40323-PF4-AC230/230/240ATP	212792
3200A	NKA40323-PF4-AC230/400/41.5TP	212793
3200A	NKA40323-PF4-AC230/400/41.5ATP	212794
3200A	NKA40323-AF4-AC230/230/240TP	103628

NKA-4000 Fixed 4P

Rated Current	Description	Code
3600A	NKA4032.6-AF4-AC220/230/240VTF	192310
3600A	NKA4032.6-AF4-AC220/230/240V1.5TF	108682
3600A	NKA4032.6-AF4-AC220/230/240V1.5WTF	192328
3600A	NKA4032.6-HF4-AC220/230/240TF	212799
3600A	NKA4032.6-HF4-AC220/230/240WTF	212800
3600A	NKA4032.6-HF4-AC220/240/41.5TF	212801
3600A	NKA4032.6-HF4-AC220/240/41.5WTF	212807
3600A	NKA4032.6-AF4-AC220/230/240TF	108687
3600A	NKA4032.6-AF4-AC220/230/240WTF	192314
3600A	NKA4032.6-AF4-AC220/240/41.5TF	108688
3600A	NKA4032.6-AF4-AC220/230/240WTF	192328
3600A	NKA4032.6-HF4-AC220/230/240TF	212795
3600A	NKA4032.6-HF4-AC220/230/240WTF	212794
3600A	NKA4032.6-HF4-AC220/240/41.5TF	212793
3600A	NKA4032.6-HF4-AC220/240/41.5WTF	212798
4000A	NKA405.40-AF4-AC220/230/240TF	108686
4000A	NKA405.40-AF4-AC220/230/240WTF	192318
4000A	NKA405.40-AF4-AC220/240/41.5TF	108670
4000A	NKA405.40-AF4-AC220/240/41.5WTF	192322
4000A	NKA405.40-HF4-AC220/230/240TF	212801
4000A	NKA405.40-HF4-AC220/230/240WTF	212807
4000A	NKA405.40-HF4-AC220/240/41.5TF	212803
4000A	NKA405.40-HF4-AC220/240/41.5WTF	212804
4000A	NKA405.40-AF4-AC220/230/240TF	108680
4000A	NKA405.40-AF4-AC220/230/240WTF	192322
4000A	NKA405.40-AF4-AC220/240/41.5TF	108674
4000A	NKA405.40-AF4-AC220/240/41.5WTF	192326
4000A	NKA405.40-HF4-AC220/230/240TF	212812
4000A	NKA405.40-HF4-AC220/230/240WTF	212814
4000A	NKA405.40-HF4-AC220/240/41.5TF	212817
4000A	NKA405.40-HF4-AC220/240/41.5WTF	212818

NKA-4000 With rowable 3P

Rated Current	Description	Code
3200A	NKA40 H22-A-B3-AC220/230/240TF	937109
3200A	NKA40 H22-A-B3-AC220/230/240WTF	937108
3200A	NKA40 H22-A-B3-AC220/240/41.5TF	937110
3200A	NKA40 H22-A-B3-AC220/240/41.5WTF	937228
3200A	NKA40 H22-A-B3-BC110TF	937111
3200A	NKA40 H22-A-B3-BC110WTF	937230
3200A	NKA40 H22-A-B3-BC220TF	937112
3200A	NKA40 H22-A-B3-BC220WTF	937274
3200A	NKA40 H22-HB3-AC220/230/240TF	214407
3200A	NKA40 H22-HB3-AC220/230/240WTF	214408
3200A	NKA40 H22-HB3-AC220/240/41.5TF	214409
3200A	NKA40 H22-HB3-AC220/240/41.5WTF	214410
3200A	NKA40 H22-HB3-BC110TF	214411
3200A	NKA40 H22-HB3-BC110WTF	214413
3200A	NKA40 H22-HB3-BC220TF	214415
3200A	NKA40 H22-HB3-BC220WTF	214416
3200A	NKA40 H22-A-B3-AC220/230/240TF	937125
3200A	NKA40 H22-A-B3-AC220/230/240-3P1WTF	215974
3200A	NKA40 H22-A-B3-AC220/230/240WTF	937208
3200A	NKA40 H22-A-B3-AC220/230/240A-3P1WTF	215975
3200A	NKA40 H22-A-B3-AC220/240/41.5TF	937126
3200A	NKA40 H22-A-B3-AC220/240/41.5WTF	937232
3200A	NKA40 H22-A-B3-BC110TF	937127
3200A	NKA40 H22-A-B3-BC110WTF	937236
3200A	NKA40 H22-A-B3-BC220TF	937128
3200A	NKA40 H22-A-B3-BC220WTF	937280
3200A	NKA40 H22-HB3-AC220/230/240TF	214073
3200A	NKA40 H22-HB3-AC220/230/240WTF	214078
3200A	NKA40 H22-HB3-AC220/240/41.5TF	214077
3200A	NKA40 H22-HB3-AC220/240/41.5WTF	214078
3200A	NKA40 H22-HB3-BC110TF	214079
3200A	NKA40 H22-HB3-BC110WTF	214080
3200A	NKA40 H22-HB3-BC220TF	214081
3200A	NKA40 H22-HB3-BC220WTF	214082
3600A	NKA40 H26-A-B3-AC220/230/240TF	937131
3600A	NKA40 H26-A-B3-AC220/230/240WTF	937217
3600A	NKA40 H26-A-B3-AC220/240/41.5TF	937142
3600A	NKA40 H26-A-B3-AC220/240/41.5WTF	937228
3600A	NKA40 H26-A-B3-BC110TF	937145

NKA-4000 Withdrawable 3P

Rated Current	Description	Code
3600A	NKA40H33-A-B3-BC110ATP	951280
3600A	NKA40H33-A-B3-BC220TP	951288
3600A	NKA40H33-A-B3-BC220ATP	951289
3600A	NKA40H33-H-B3-AC220/230/240TP	214471
3600A	NKA40H33-H-B3-AC220/230/240-3P1HTP	292073
3600A	NKA40H33-H-B3-AC220/230/240ATP	214472
3600A	NKA40H33-H-B3-AC280/400/513TP	214473
3600A	NKA40H33-H-B3-AC280/400/513ATP	214474
3600A	NKA40H33-H-B3-BC110TP	214475
3600A	NKA40H33-H-B3-BC110ATP	214476
3600A	NKA40H33-H-B3-BC220TP	214477
3600A	NKA40H33-H-B3-BC220ATP	214478
3600A	NKA40H33-W-B3-AC220/230/240TP	951287
3600A	NKA40H33-W-B3-AC220/230/240-3P1HTP	215074
3600A	NKA40H33-W-B3-AC220/230/240ATP	951288
3600A	NKA40H33-W-B3-AC220/230/240W-3P1HTP	215077
3600A	NKA40H33-W-B3-AC280/400/513TP	951289
3600A	NKA40H33-W-B3-AC280/400/513ATP	951290
3600A	NKA40H33-W-B3-BC110TP	951291
3600A	NKA40H33-W-B3-BC110ATP	951292
3600A	NKA40H33-W-B3-BC220TP	951293
3600A	NKA40H33-W-B3-BC220ATP	951294
3600A	NKA40H33-F-B3-AC220/230/240TP	214409
3600A	NKA40H33-F-B3-AC220/230/240ATP	214480
3600A	NKA40H33-F-B3-AC280/400/513TP	214481
3600A	NKA40H33-F-B3-AC280/400/513ATP	214482
3600A	NKA40H33-F-B3-BC110TP	214483
3600A	NKA40H33-F-B3-BC110ATP	214484
3600A	NKA40H33-F-B3-BC220TP	214485
3600A	NKA40H33-F-B3-BC220ATP	214486
4000A	NKA40H40-A-B3-AC220/230/240TP	951295
4000A	NKA40H40-A-B3-AC220/230/240ATP	951296
4000A	NKA40H40-A-B3-AC280/400/513TP	951297
4000A	NKA40H40-A-B3-AC280/400/513ATP	951298
4000A	NKA40H40-A-B3-BC110TP	951299
4000A	NKA40H40-A-B3-BC110ATP	951300
4000A	NKA40H40-A-B3-BC220TP	951301
4000A	NKA40H40-A-B3-BC220ATP	951302
4000A	NKA40H40-H-B3-AC220/230/240TP	212513

NKA-4000 Withdrawable 3P

4000A	NKA40H40-H-B3-AC220/230/240ATP	212514
4000A	NKA40H40-H-B3-AC280/400/513TP	212517
4000A	NKA40H40-H-B3-AC280/400/513ATP	212518
4000A	NKA40H40-H-B3-BC110TP	212519
4000A	NKA40H40-H-B3-BC110ATP	212520
4000A	NKA40H40-H-B3-BC220TP	212521
4000A	NKA40H40-H-B3-BC220ATP	212522
4000A	NKA40H40-W-B3-AC220/230/240TP	951299
4000A	NKA40H40-W-B3-AC220/230/240-3P1HTP	215078
4000A	NKA40H40-W-B3-AC220/230/240ATP	951303
4000A	NKA40H40-W-B3-AC220/230/240W-3P1HTP	215079
4000A	NKA40H40-W-B3-AC280/400/513TP	951304
4000A	NKA40H40-W-B3-AC280/400/513ATP	951305
4000A	NKA40H40-W-B3-BC110TP	951306
4000A	NKA40H40-W-B3-BC110ATP	951307
4000A	NKA40H40-W-B3-BC220TP	951308
4000A	NKA40H40-W-B3-BC220ATP	951309
4000A	NKA40H40-F-B3-AC220/230/240TP	214503
4000A	NKA40H40-F-B3-AC220/230/240ATP	214504
4000A	NKA40H40-F-B3-AC280/400/513TP	214505
4000A	NKA40H40-F-B3-AC280/400/513ATP	214506
4000A	NKA40H40-F-B3-BC110TP	214507
4000A	NKA40H40-F-B3-BC110ATP	214508
4000A	NKA40H40-F-B3-BC220TP	214509
4000A	NKA40H40-F-B3-BC220ATP	214510
3200A	NKA40H33-A-B3-AC220/230/240TP	942230
3200A	NKA40H33-A-B3-AC220/230/240ATP	942238
3200A	NKA40H33-A-B3-AC280/400/513TP	942239
3200A	NKA40H33-A-B3-AC280/400/513ATP	942242
3200A	NKA40H33-A-B3-BC110TP	942245
3200A	NKA40H33-A-B3-BC110ATP	942248
3200A	NKA40H33-A-B3-BC220TP	942251
3200A	NKA40H33-A-B3-BC220ATP	942254
3200A	NKA40H33-H-B3-AC220/230/240TP	212519
3200A	NKA40H33-H-B3-AC220/230/240ATP	212520
3200A	NKA40H33-H-B3-AC280/400/513TP	212521
3200A	NKA40H33-H-B3-AC280/400/513ATP	212522
3200A	NKA40H33-H-B3-BC110TP	212523
3200A	NKA40H33-H-B3-BC110ATP	212524

NKA-4000 Withdrawable 3P

Rated Current	Description	Code
3200A	NKA40M32-H BD-BC220TF	212285
3200A	NKA40M32-H BD-BC220MTF	212286
3200A	NKA40M32-ABD3-AC220/230/240TF	942224
3200A	NKA40M32-ABD3-AC220/230/240-3FI HTF	212980
3200A	NKA40M32-ABD3-AC220/230/240MTF	942282
3200A	NKA40M32-ABD3-AC220/230/240A-3FI HTF	212981
3200A	NKA40M32-ABD3-AC280/300/315TF	942288
3200A	NKA40M32-ABD3-AC280/300/315MTF	942289
3200A	NKA40M32-ABD3-BC110TF	942282
3200A	NKA40M32-ABD3-BC110MTF	942210
3200A	NKA40M32-ABD3-BC220TF	942406
3200A	NKA40M32-ABD3-BC220MTF	942224
3200A	NKA40M32-FBD3-AC220/230/240TF	212247
3200A	NKA40M32-FBD3-AC220/230/240MTF	212248
3200A	NKA40M32-FBD3-AC280/300/315TF	212249
3200A	NKA40M32-FBD3-AC280/300/315MTF	212250
3200A	NKA40M32-FBD3-BC110TF	212251
3200A	NKA40M32-FBD3-BC110MTF	212252
3200A	NKA40M32-FBD3-BC220TF	212253
3200A	NKA40M32-FBD3-BC220MTF	212254
3600A	NKA40M36-ABD3-AC220/230/240TF	942228
3600A	NKA40M36-ABD3-AC220/230/240MTF	942286
3600A	NKA40M36-ABD3-AC280/300/315TF	942282
3600A	NKA40M36-ABD3-AC280/300/315MTF	942290
3600A	NKA40M36-ABD3-BC110TF	942286
3600A	NKA40M36-ABD3-BC110MTF	942214
3600A	NKA40M36-ABD3-BC220TF	942410
3600A	NKA40M36-ABD3-BC220MTF	942228
3600A	NKA40M36-HBD3-AC220/230/240TF	212643
3600A	NKA40M36-HBD3-AC220/230/240MTF	212644
3600A	NKA40M36-HBD3-AC280/300/315TF	212645
3600A	NKA40M36-HBD3-AC280/300/315MTF	212646
3600A	NKA40M36-HBD3-BC110TF	212647
3600A	NKA40M36-HBD3-BC110MTF	212648
3600A	NKA40M36-HBD3-BC220TF	212649
3600A	NKA40M36-HBD3-BC220MTF	212650
3600A	NKA40M36-ABD3-AC220/230/240TF	942242
3600A	NKA40M36-ABD3-AC220/230/240-3FI HTF	212982
3600A	NKA40M36-ABD3-AC220/230/240MTF	942210

NKA-4000 Withdrawable 3P

Rated Current	Description	Code
3200A	NKA40M32-H BD3-BC220TF	212285
3200A	NKA40M32-H BD3-BC220MTF	212286
3200A	NKA40M32-ABD3-AC220/230/240TF	942224
3200A	NKA40M32-ABD3-AC220/230/240-3FI HTF	212980
3200A	NKA40M32-ABD3-AC220/230/240MTF	942282
3200A	NKA40M32-ABD3-AC220/230/240A-3FI HTF	212981
3200A	NKA40M32-ABD3-AC280/300/315TF	942288
3200A	NKA40M32-ABD3-AC280/300/315MTF	942289
3200A	NKA40M32-ABD3-BC110TF	942282
3200A	NKA40M32-ABD3-BC110MTF	942210
3200A	NKA40M32-ABD3-BC220TF	942406
3200A	NKA40M32-ABD3-BC220MTF	942224
3200A	NKA40M32-FBD3-AC220/230/240TF	212247
3200A	NKA40M32-FBD3-AC220/230/240MTF	212248
3200A	NKA40M32-FBD3-AC280/300/315TF	212249
3200A	NKA40M32-FBD3-AC280/300/315MTF	212250
3200A	NKA40M32-FBD3-BC110TF	212251
3200A	NKA40M32-FBD3-BC110MTF	212252
3200A	NKA40M32-FBD3-BC220TF	212253
3200A	NKA40M32-FBD3-BC220MTF	212254
3600A	NKA40M36-ABD3-AC220/230/240TF	942228
3600A	NKA40M36-ABD3-AC220/230/240MTF	942286
3600A	NKA40M36-ABD3-AC280/300/315TF	942282
3600A	NKA40M36-ABD3-AC280/300/315MTF	942290
3600A	NKA40M36-ABD3-BC110TF	942286
3600A	NKA40M36-ABD3-BC110MTF	942214
3600A	NKA40M36-ABD3-BC220TF	942410
3600A	NKA40M36-ABD3-BC220MTF	942228
3600A	NKA40M36-HBD3-AC220/230/240TF	212643
3600A	NKA40M36-HBD3-AC220/230/240MTF	212644
3600A	NKA40M36-HBD3-AC280/300/315TF	212645
3600A	NKA40M36-HBD3-AC280/300/315MTF	212646
3600A	NKA40M36-HBD3-BC110TF	212647
3600A	NKA40M36-HBD3-BC110MTF	212648
3600A	NKA40M36-HBD3-BC220TF	212649
3600A	NKA40M36-HBD3-BC220MTF	212650
3600A	NKA40M36-ABD3-AC220/230/240TF	942242
3600A	NKA40M36-ABD3-AC220/230/240-3FI HTF	212982
3600A	NKA40M36-ABD3-AC220/230/240MTF	942210

NKA-4000 Withdrawable 3P

Rated Current	Description	Code
3600A	NKA40M36-ABD3-AC220/230/240V-3P1-NTF	213980
3600A	NKA40M36-ABD3-AC280/400/415TF	942288
3600A	NKA40M36-ABD3-AC280/400/415MTF	942294
3600A	NKA40M36-ABD3-DC110TF	942290
3600A	NKA40M36-ABD3-DC110MTF	942318
3600A	NKA40M36-ABD3-DC220TF	942414
3600A	NKA40M36-ABD3-DC220MTF	942342
3600A	NKA40M36-PB3-AC220/230/240TF	212611
3600A	NKA40M36-PB3-AC220/230/240MTF	212612
3600A	NKA40M36-PB3-AC280/400/415TF	212613
3600A	NKA40M36-PB3-AC280/400/415MTF	212614
3600A	NKA40M36-PB3-DC110TF	212615
3600A	NKA40M36-PB3-DC110MTF	212616
3600A	NKA40M36-PB3-DC220TF	212617
3600A	NKA40M36-PB3-DC220MTF	212618
4000A	NKA40M40-ABD3-AC220/230/240TF	942346
4000A	NKA40M40-ABD3-AC220/230/240-3P1-NTF	208534
4000A	NKA40M40-ABD3-AC220/230/240MTF	942374
4000A	NKA40M40-ABD3-AC280/400/415TF	942370
4000A	NKA40M40-ABD3-AC280/400/415MTF	942398
4000A	NKA40M40-ABD3-DC110TF	942394
4000A	NKA40M40-ABD3-DC110MTF	942372
4000A	NKA40M40-ABD3-DC220TF	942418
4000A	NKA40M40-ABD3-DC220MTF	942346
4000A	NKA40M40-HB3-AC220/230/240TF	212707
4000A	NKA40M40-HB3-AC220/230/240MTF	212708
4000A	NKA40M40-HB3-AC280/400/415TF	212709
4000A	NKA40M40-HB3-AC280/400/415MTF	212710
4000A	NKA40M40-HB3-DC110TF	212711
4000A	NKA40M40-HB3-DC110MTF	212712
4000A	NKA40M40-HB3-DC220TF	212713
4000A	NKA40M40-HB3-DC220MTF	212714
4000A	NKA40M40-ABD3-AC220/230/240TF	942346
4000A	NKA40M40-ABD3-AC220/230/240-3P1-NTF	213984
4000A	NKA40M40-ABD3-AC220/230/240MTF	942374
4000A	NKA40M40-ABD3-AC220/230/240V-3P1-NTF	213985
4000A	NKA40M40-ABD3-AC280/400/415TF	942374
4000A	NKA40M40-ABD3-AC280/400/415MTF	942398
4000A	NKA40M40-ABD3-DC110TF	942398

NKA-4000 Withdrawable 3P

Rated Current	Description	Code
4000A	NKA40M40-ABD3-DC110MTF	942374
4000A	NKA40M40-ABD3-DC220TF	942420
4000A	NKA40M40-ABD3-DC220MTF	942340
4000A	NKA40M40-PB3-AC220/230/240TF	212675
4000A	NKA40M40-PB3-AC220/230/240MTF	212676
4000A	NKA40M40-PB3-AC280/400/415TF	212677
4000A	NKA40M40-PB3-AC280/400/415MTF	212678
4000A	NKA40M40-PB3-DC110TF	212679
4000A	NKA40M40-PB3-DC110MTF	212680
4000A	NKA40M40-PB3-DC220TF	212681
4000A	NKA40M40-PB3-DC220MTF	212682
3200A	NKA0532-AB3-AC220/230/240TF	108627
3200A	NKA0532-AB3-AC220/230/240MTF	192899
3200A	NKA0532-AB3-AC280/400/415TF	108631
3200A	NKA0532-AB3-AC280/400/415MTF	192903
3200A	NKA0532-HB3-AC220/230/240TF	212755
3200A	NKA0532-HB3-AC220/230/240MTF	212756
3200A	NKA0532-HB3-AC280/400/415TF	212757
3200A	NKA0532-HB3-AC280/400/415MTF	212758
3200A	NKA0532-AB3-AC220/230/240TF	108631
3200A	NKA0532-AB3-AC220/230/240-3P1-NTF	213986
3200A	NKA0532-AB3-AC220/230/240MTF	192903
3200A	NKA0532-AB3-AC220/230/240V-3P1-NTF	213987
3200A	NKA0532-AB3-AC280/400/415TF	108633
3200A	NKA0532-AB3-AC280/400/415MTF	192907
3200A	NKA0532-PB3-AC220/230/240TF	212739
3200A	NKA0532-PB3-AC220/230/240MTF	212740
3200A	NKA0532-PB3-AC280/400/415TF	212741
3200A	NKA0532-PB3-AC280/400/415MTF	212742
2600A	NKA0526-AB3-AC220/230/240TF	108625
2600A	NKA0526-AB3-AC220/230/240MTF	192897
2600A	NKA0526-AB3-AC280/400/415TF	108629
2600A	NKA0526-AB3-AC280/400/415MTF	192901
2600A	NKA0526-HB3-AC220/230/240TF	212787
2600A	NKA0526-HB3-AC220/230/240MTF	212788
2600A	NKA0526-HB3-AC280/400/415TF	212789
2600A	NKA0526-HB3-AC280/400/415MTF	212790
2600A	NKA0526-AB3-AC220/230/240TF	108629
2600A	NKA0526-AB3-AC220/230/240-3P1-NTF	213988

NKA-4000 Withdrawable 3P

Rated Current	Description	Code
3200A	NKA4033-A-B3-AC220/230/240VTF	192511
3200A	NKA4033-A-B3-AC220/230/240V-3P11WTF	213989
3200A	NKA4033-A-B3-AC220/230/240V1.5WTF	108662
3200A	NKA4033-A-B3-AC220/230/240V1.5WTF	192523
3200A	NKA4033-F-B3-AC220/230/240TF	213991
3200A	NKA4033-F-B3-AC220/230/240VTF	213992
3200A	NKA4033-F-B3-AC220/230/240V1.5TF	213993
3200A	NKA4033-F-B3-AC220/230/240V1.5WTF	213994
4000A	NKA4034-A-B3-AC220/230/240TF	108663
4000A	NKA4034-A-B3-AC220/230/240VTF	192512
4000A	NKA4034-A-B3-AC220/230/240V1.5TF	108667
4000A	NKA4034-A-B3-AC220/230/240V1.5WTF	192524
4000A	NKA4034-H-B3-AC220/230/240TF	213995
4000A	NKA4034-H-B3-AC220/230/240VTF	213996
4000A	NKA4034-H-B3-AC220/230/240V1.5TF	213997
4000A	NKA4034-H-B3-AC220/230/240V1.5WTF	213998
4000A	NKA4034-A-B3-AC220/230/240TF	108664
4000A	NKA4034-A-B3-AC220/230/240V-3P11WTF	213999
4000A	NKA4034-A-B3-AC220/230/240VTF	192519
4000A	NKA4034-A-B3-AC220/230/240V-3P11WTF	213991
4000A	NKA4034-A-B3-AC220/230/240V1.5TF	108671
4000A	NKA4034-A-B3-AC220/230/240V1.5WTF	192542
4000A	NKA4034-F-B3-AC220/230/240TF	213993
4000A	NKA4034-F-B3-AC220/230/240VTF	213994
4000A	NKA4034-F-B3-AC220/230/240V1.5TF	213995
4000A	NKA4034-F-B3-AC220/230/240V1.5WTF	213996

NKA-4000 Withdrawable 4P

Rated Current	Description	Code
3200A	NKA40H33-A-B4-AC220/230/240TF	937103
3200A	NKA40H33-A-B4-AC220/230/240VTF	937205
3200A	NKA40H33-A-B4-AC220/230/240V1.5TF	937114
3200A	NKA40H33-A-B4-AC220/230/240V1.5WTF	937206
3200A	NKA40H33-A-B4-BC110TF	937115
3200A	NKA40H33-A-B4-BC110VTF	937234
3200A	NKA40H33-A-B4-BC220TF	937116
3200A	NKA40H33-A-B4-BC220VTF	937235
3200A	NKA40H33-H-B4-AC220/230/240TF	214413
3200A	NKA40H33-H-B4-AC220/230/240VTF	214414
3200A	NKA40H33-H-B4-AC220/230/240V1.5TF	214417
3200A	NKA40H33-H-B4-AC220/230/240V1.5WTF	214418
3200A	NKA40H33-H-B4-BC110TF	214419

NKA-4000 Withdrawable 4P

3200A	NKA40H33-H-B4-BC110VTF	214420
3200A	NKA40H33-H-B4-BC220TF	214421
3200A	NKA40H33-H-B4-BC220VTF	214422
3200A	NKA40H33-A-B4-AC220/230/240TF	937129
3200A	NKA40H33-A-B4-AC220/230/240VTF	937210
3200A	NKA40H33-A-B4-AC220/230/240V1.5TF	937130
3200A	NKA40H33-A-B4-AC220/230/240V1.5WTF	937236
3200A	NKA40H33-A-B4-BC110TF	937131
3200A	NKA40H33-A-B4-BC110VTF	937238
3200A	NKA40H33-A-B4-BC220TF	937132
3200A	NKA40H33-A-B4-BC220VTF	937239
3200A	NKA40H33-F-B4-AC220/230/240TF	214393
3200A	NKA40H33-F-B4-AC220/230/240VTF	214394
3200A	NKA40H33-F-B4-AC220/230/240V1.5TF	214395
3200A	NKA40H33-F-B4-AC220/230/240V1.5WTF	214396
3200A	NKA40H33-F-B4-BC110TF	214397
3200A	NKA40H33-F-B4-BC110VTF	214398
3200A	NKA40H33-F-B4-BC220TF	214399
3200A	NKA40H33-F-B4-BC220VTF	214400
3200A	NKA40H33-A-B4-AC220/230/240TF	937143
3200A	NKA40H33-A-B4-AC220/230/240VTF	937214
3200A	NKA40H33-A-B4-AC220/230/240V1.5TF	937145
3200A	NKA40H33-A-B4-AC220/230/240V1.5WTF	937238
3200A	NKA40H33-A-B4-BC110TF	937147
3200A	NKA40H33-A-B4-BC110VTF	937239
3200A	NKA40H33-A-B4-BC220TF	937148
3200A	NKA40H33-A-B4-BC220VTF	937236
3200A	NKA40H33-H-B4-AC220/230/240TF	214419
3200A	NKA40H33-H-B4-AC220/230/240VTF	214420
3200A	NKA40H33-H-B4-AC220/230/240V1.5TF	214421
3200A	NKA40H33-H-B4-AC220/230/240V1.5WTF	214422
3200A	NKA40H33-H-B4-BC110TF	214423
3200A	NKA40H33-H-B4-BC110VTF	214424
3200A	NKA40H33-H-B4-BC220TF	214425
3200A	NKA40H33-H-B4-BC220VTF	214426
3200A	NKA40H33-A-B4-AC220/230/240TF	937161
3200A	NKA40H33-A-B4-AC220/230/240VTF	937218
3200A	NKA40H33-A-B4-AC220/230/240V1.5TF	937162
3200A	NKA40H33-A-B4-AC220/230/240V1.5WTF	937242

NKA-4000 Withdrawable 4P

Rated Current	Description	Code
2500A	NKA40H34-MB4-BC110TF	937160
2500A	NKA40H34-MB4-BC110ANTF	937166
2500A	NKA40H34-MB4-BC220TF	937168
2500A	NKA40H34-MB4-BC220ANTF	937290
2500A	NKA40H34-FB4-AC220/220/240TF	214347
2500A	NKA40H34-FB4-AC220/220/240ANTF	214348
2500A	NKA40H34-FB4-AC220/240/415TF	214349
2500A	NKA40H34-FB4-AC220/240/415ANTF	214350
2500A	NKA40H34-FB4-BC110TF	214351
2500A	NKA40H34-FB4-BC110ANTF	214352
2500A	NKA40H34-FB4-BC220TF	214353
2500A	NKA40H34-FB4-BC220ANTF	214354
4000A	NKA40H40-A-B4-AC220/220/240TF	937177
4000A	NKA40H40-A-B4-AC220/220/240ANTF	937172
4000A	NKA40H40-A-B4-AC220/240/415TF	937178
4000A	NKA40H40-A-B4-AC220/240/415ANTF	937248
4000A	NKA40H40-A-B4-BC110TF	937179
4000A	NKA40H40-A-B4-BC110ANTF	937249
4000A	NKA40H40-A-B4-BC220TF	937180
4000A	NKA40H40-A-B4-BC220ANTF	937294
4000A	NKA40H40-H-B4-AC220/220/240TF	212522
4000A	NKA40H40-H-B4-AC220/220/240ANTF	212524
4000A	NKA40H40-H-B4-AC220/240/415TF	212525
4000A	NKA40H40-H-B4-AC220/240/415ANTF	212526
4000A	NKA40H40-H-B4-BC110TF	212527
4000A	NKA40H40-H-B4-BC110ANTF	212528
4000A	NKA40H40-H-B4-BC220TF	212529
4000A	NKA40H40-H-B4-BC220ANTF	212530
4000A	NKA40H40-M-B4-AC220/220/240TF	937190
4000A	NKA40H40-M-B4-AC220/220/240ANTF	937226
4000A	NKA40H40-M-B4-AC220/240/415TF	937194
4000A	NKA40H40-M-B4-AC220/240/415ANTF	937230
4000A	NKA40H40-M-B4-BC110TF	937195
4000A	NKA40H40-M-B4-BC110ANTF	937244
4000A	NKA40H40-M-B4-BC220TF	937196
4000A	NKA40H40-M-B4-BC220ANTF	937298
4000A	NKA40H40-F-B4-AC220/220/240TF	214311
4000A	NKA40H40-F-B4-AC220/220/240ANTF	214312
4000A	NKA40H40-F-B4-AC220/240/415TF	214313

NKA-4000 Withdrawable 4P

4000A	NKA40H40-F-B4-AC220/240/415ANTF	214314
4000A	NKA40H40-F-B4-BC110TF	214315
4000A	NKA40H40-F-B4-BC110ANTF	214316
4000A	NKA40H40-F-B4-BC220TF	214317
4000A	NKA40H40-F-B4-BC220ANTF	214318
2200A	NKA40H32-A-B4-AC220/220/240TF	942232
2200A	NKA40H32-A-B4-AC220/220/240ANTF	942240
2200A	NKA40H32-A-B4-AC220/240/415TF	942236
2200A	NKA40H32-A-B4-AC220/240/415ANTF	942284
2200A	NKA40H32-A-B4-BC110TF	942280
2200A	NKA40H32-A-B4-BC110ANTF	942208
2200A	NKA40H32-A-B4-BC220TF	942404
2200A	NKA40H32-A-B4-BC220ANTF	942232
2200A	NKA40H32-H-B4-AC220/220/240TF	212587
2200A	NKA40H32-H-B4-AC220/220/240ANTF	212588
2200A	NKA40H32-H-B4-AC220/240/415TF	212589
2200A	NKA40H32-H-B4-AC220/240/415ANTF	212590
2200A	NKA40H32-H-B4-BC110TF	212591
2200A	NKA40H32-H-B4-BC110ANTF	212592
2200A	NKA40H32-H-B4-BC220TF	212593
2200A	NKA40H32-H-B4-BC220ANTF	212594
2200A	NKA40H32-M-B4-AC220/220/240TF	942236
2200A	NKA40H32-M-B4-AC220/220/240ANTF	942264
2200A	NKA40H32-M-B4-AC220/240/415TF	942240
2200A	NKA40H32-M-B4-AC220/240/415ANTF	942286
2200A	NKA40H32-M-B4-BC110TF	942284
2200A	NKA40H32-M-B4-BC110ANTF	942212
2200A	NKA40H32-M-B4-BC220TF	942408
2200A	NKA40H32-M-B4-BC220ANTF	942236
2200A	NKA40H32-F-B4-AC220/220/240TF	214335
2200A	NKA40H32-F-B4-AC220/220/240ANTF	214336
2200A	NKA40H32-F-B4-AC220/240/415TF	214337
2200A	NKA40H32-F-B4-AC220/240/415ANTF	214338
2200A	NKA40H32-F-B4-BC110TF	214339
2200A	NKA40H32-F-B4-BC110ANTF	214340
2200A	NKA40H32-F-B4-BC220TF	214341
2200A	NKA40H32-F-B4-BC220ANTF	214342
2400A	NKA40H34-A-B4-AC220/220/240TF	942240
2400A	NKA40H34-A-B4-AC220/220/240ANTF	942288

NKA-4000 Withdrawable 4P

Rated Current	Description	Code
3500A	NKA400035-A-B4-AC280/300/41.5TF	942254
3500A	NKA400035-A-B4-AC280/300/41.5MTF	942255
3500A	NKA400035-A-B4-BC110TF	942258
3500A	NKA400035-A-B4-BC110MTF	942259
3500A	NKA400035-A-B4-BC220TF	942262
3500A	NKA400035-A-B4-BC220MTF	942263
3500A	NKA400035-H-B4-AC220/230/240TF	212251
3500A	NKA400035-H-B4-AC220/230/240MTF	212252
3500A	NKA400035-H-B4-AC280/300/31.5TF	212253
3500A	NKA400035-H-B4-AC280/300/31.5MTF	212254
3500A	NKA400035-H-B4-BC110TF	212255
3500A	NKA400035-H-B4-BC110MTF	212256
3500A	NKA400035-H-B4-BC220TF	212257
3500A	NKA400035-H-B4-BC220MTF	212258
3500A	NKA400035-WB4-AC220/230/240TF	942254
3500A	NKA400035-WB4-AC220/230/240MTF	942255
3500A	NKA400035-WB4-AC280/300/31.5TF	942258
3500A	NKA400035-WB4-AC280/300/31.5MTF	942259
3500A	NKA400035-WB4-BC110TF	942262
3500A	NKA400035-WB4-BC110MTF	942263
3500A	NKA400035-WB4-BC220TF	942266
3500A	NKA400035-WB4-BC220MTF	942267
3500A	NKA400035-FB4-AC220/230/240TF	212259
3500A	NKA400035-FB4-AC220/230/240MTF	212260
3500A	NKA400035-FB4-AC280/300/31.5TF	212261
3500A	NKA400035-FB4-AC280/300/31.5MTF	212262
3500A	NKA400035-FB4-BC110TF	212263
3500A	NKA400035-FB4-BC110MTF	212264
3500A	NKA400035-FB4-BC220TF	212265
3500A	NKA400035-FB4-BC220MTF	212266
4000A	NKA400040-A-B4-AC220/230/240TF	942258
4000A	NKA400040-A-B4-AC220/230/240MTF	942259
4000A	NKA400040-A-B4-AC280/300/31.5TF	942262
4000A	NKA400040-A-B4-AC280/300/31.5MTF	942263
4000A	NKA400040-A-B4-BC110TF	942266
4000A	NKA400040-A-B4-BC110MTF	942267
4000A	NKA400040-A-B4-BC220TF	942270
4000A	NKA400040-A-B4-BC220MTF	942271
4000A	NKA400040-H-B4-AC220/230/240TF	212267

NKA-4000 Withdrawable 4P

Rated Current	Description	Code
4000A	NKA400040-H-B4-AC220/230/240MTF	212268
4000A	NKA400040-H-B4-AC280/300/31.5TF	212269
4000A	NKA400040-H-B4-AC280/300/31.5MTF	212272
4000A	NKA400040-H-B4-BC110TF	212273
4000A	NKA400040-H-B4-BC110MTF	212276
4000A	NKA400040-H-B4-BC220TF	212279
4000A	NKA400040-H-B4-BC220MTF	212282
4000A	NKA400040-WB4-AC220/230/240TF	942260
4000A	NKA400040-WB4-AC220/230/240MTF	942261
4000A	NKA400040-WB4-AC280/300/31.5TF	942264
4000A	NKA400040-WB4-AC280/300/31.5MTF	942265
4000A	NKA400040-WB4-BC110TF	942268
4000A	NKA400040-WB4-BC110MTF	942269
4000A	NKA400040-WB4-BC220TF	942272
4000A	NKA400040-WB4-BC220MTF	942273
4000A	NKA400040-FB4-AC220/230/240TF	212280
4000A	NKA400040-FB4-AC220/230/240MTF	212281
4000A	NKA400040-FB4-AC280/300/31.5TF	212284
4000A	NKA400040-FB4-AC280/300/31.5MTF	212285
4000A	NKA400040-FB4-BC110TF	212288
4000A	NKA400040-FB4-BC110MTF	212289
4000A	NKA400040-FB4-BC220TF	212292
4000A	NKA400040-FB4-BC220MTF	212293
5000A	NKA405035-A-B4-AC220/230/240TF	192259
5000A	NKA405035-A-B4-AC220/230/240MTF	192260
5000A	NKA405035-A-B4-AC280/300/31.5TF	192263
5000A	NKA405035-A-B4-AC280/300/31.5MTF	192264
5000A	NKA405035-H-B4-AC220/230/240TF	212296
5000A	NKA405035-H-B4-AC220/230/240MTF	212297
5000A	NKA405035-H-B4-AC280/300/31.5TF	212298
5000A	NKA405035-H-B4-AC280/300/31.5MTF	212299
5000A	NKA405035-WB4-AC220/230/240TF	192261
5000A	NKA405035-WB4-AC220/230/240MTF	192262
5000A	NKA405035-WB4-AC280/300/31.5TF	192265
5000A	NKA405035-WB4-AC280/300/31.5MTF	192266
5000A	NKA405035-FB4-AC220/230/240TF	212294
5000A	NKA405035-FB4-AC220/230/240MTF	212295
5000A	NKA405035-FB4-AC280/300/31.5TF	212296
5000A	NKA405035-FB4-AC280/300/31.5MTF	212297

NKA-4000 Withdrawable 4P

Rated Current	Description	Code
2500A	NKA4000.6-A04-AC220/230/240TF	103407
2500A	NKA4000.6-A04-AC220/230/240ANTF	193409
2500A	NKA4000.6-A04-AC220/240/41.5TF	103441
2500A	NKA4000.6-A04-AC220/240/41.5ANTF	193403
2500A	NKA4000.6-H04-AC220/230/240TF	213791
2500A	NKA4000.6-H04-AC220/230/240ANTF	213792
2500A	NKA4000.6-H04-AC220/240/41.5TF	213793
2500A	NKA4000.6-H04-AC220/240/41.5ANTF	213794
2500A	NKA4000.6-A04-AC220/230/240TF	103441
2500A	NKA4000.6-A04-AC220/230/240ANTF	193413
2500A	NKA4000.6-A04-AC220/240/41.5TF	103443
2500A	NKA4000.6-A04-AC220/240/41.5ANTF	193417
2500A	NKA4000.6-P04-AC220/230/240TF	213773
2500A	NKA4000.6-P04-AC220/230/240ANTF	213774
2500A	NKA4000.6-P04-AC220/240/41.5TF	213777
2500A	NKA4000.6-P04-AC220/240/41.5ANTF	213778
4000A	NKA4004.0-A04-AC220/230/240TF	103445
4000A	NKA4004.0-A04-AC220/230/240ANTF	193417
4000A	NKA4004.0-A04-AC220/240/41.5TF	103449
4000A	NKA4004.0-A04-AC220/240/41.5ANTF	193421
4000A	NKA4004.0-H04-AC220/230/240TF	213823
4000A	NKA4004.0-H04-AC220/230/240ANTF	213824
4000A	NKA4004.0-H04-AC220/240/41.5TF	213825
4000A	NKA4004.0-H04-AC220/240/41.5ANTF	213826
4000A	NKA4004.0-A04-AC220/230/240TF	103449
4000A	NKA4004.0-A04-AC220/230/240ANTF	193421
4000A	NKA4004.0-A04-AC220/240/41.5TF	103453
4000A	NKA4004.0-A04-AC220/240/41.5ANTF	193425
4000A	NKA4004.0-P04-AC220/230/240TF	213807
4000A	NKA4004.0-P04-AC220/230/240ANTF	213808
4000A	NKA4004.0-P04-AC220/240/41.5TF	213809
4000A	NKA4004.0-P04-AC220/240/41.5ANTF	213810

NKA-6300 Fixed 3P

Rated Current	Description	Code
4000A	NKA6300.0-A03-AC220/230/240TF	213827
4000A	NKA6300.0-A03-AC220/240/41.5TF	213828
4000A	NKA6300.0-A03-AC220/230/240TF	213827
4000A	NKA6300.0-A03-AC220/230/240ANTF	219043
4000A	NKA6300.0-A03-AC220/240/41.5TF	213828
5000A	NKA6300.0-A03-AC220/230/240TF	213829
5000A	NKA6300.0-A03-AC220/240/41.5TF	213830
5000A	NKA6300.0-A03-AC220/230/240TF	213829
5000A	NKA6300.0-A03-AC220/230/240ANTF	219044
5000A	NKA6300.0-A03-AC220/230/240ANTF	219041
5000A	NKA6300.0-A03-AC220/240/41.5TF	213834
5000A	NKA6300.0-A03-AC220/230/240TF	213835
5000A	NKA6300.0-A03-AC220/230/240TF	213836
5000A	NKA6300.0-A03-AC220/230/240TF	213837
5000A	NKA6300.0-A03-AC220/240/41.5TF	213838
5000A	NKA6300.0-A03-AC220/230/240TF	213839
5000A	NKA6300.0-A03-AC220/230/240ANTF	219040
5000A	NKA6300.0-A03-AC220/240/41.5TF	213840

NKA-6300 Fixed 4P

Rated Current	Description	Code
4000A	NKA6300.0-A04-AC220/230/240TF	213841
4000A	NKA6300.0-A04-AC220/240/41.5TF	213842
4000A	NKA6300.0-A04-AC220/230/240TF	213843
4000A	NKA6300.0-A04-AC220/240/41.5TF	213844
4000A	NKA6300.0-A04-AC220/230/240TF	213845
4000A	NKA6300.0-A04-AC220/230/240TF	213846
4000A	NKA6300.0-A04-AC220/240/41.5TF	213847
4000A	NKA6300.0-A04-AC220/230/240TF	213848
4000A	NKA6300.0-A04-AC220/230/240TF	213849
4000A	NKA6300.0-A04-AC220/240/41.5TF	213850

NKA-6300 Withdrawable 3P


Rated Current	Description	Code
4000A	NKA63 H40-A B3-AC220/230/240TF	217577
4000A	NKA63 H40-A B3-AC220/240/41.5TF	217578
4000A	NKA63 H40-H B3-AC220/230/240ATF	329040
4000A	NKA63 H40-A B3-AC220/230/240TF	217577
4000A	NKA63 H40-A B3-AC220/230/240ATF	282807
4000A	NKA63 H40-A B3-AC220/230/240A-3 FI H TF	217579
4000A	NKA63 H40-A B3-AC220/240/41.5TF	217578
4000A	NKA63 H40-A B3-AC220/240/41.5ATF	282808
4000A	NKA63 H40-A B3-AC220/240/41.5A-3 FI H TF	217578
4000A	NKA63 H40-F B3-AC220/230/240ATF	329039
4000A	NKA63 H40-A B3-AC220/230/240TF	217573
4000A	NKA63 H40-A B3-AC220/240/41.5TF	217574
4000A	NKA63 H40-H B3-AC220/230/240/3 FI H	317938
4000A	NKA63 H40-H B3-AC220/230/240/3 FI H TF	317939
4000A	NKA63 H40-H B3-AC220/230/240ATF	329041
4000A	NKA63 H40-A B3-AC220/230/240TF	217573
4000A	NKA63 H40-A B3-AC220/230/240ATF	282811
4000A	NKA63 H40-A B3-AC220/230/240A-3 FI H TF	217579
4000A	NKA63 H40-A B3-AC220/240/41.5TF	217574
4000A	NKA63 H40-A B3-AC220/240/41.5ATF	282812
4000A	NKA63 H40-A B3-AC220/240/41.5A-3 FI H TF	217579
4000A	NKA63 H40-F B3-AC220/230/240BF	329037
4000A	NKA63 H40-F B3-AC220/230/240ATF	329038
4000A	NKA63 H40-A B3-AC220/230/240TF	217579
4000A	NKA63 H40-A B3-AC220/240/41.5TF	217578
4000A	NKA63 H40-H B3-AC220/230/240ATF	329042
4000A	NKA63 H40-A B3-AC220/230/240TF	217579
4000A	NKA63 H40-A B3-AC220/230/240ATF	329038
4000A	NKA63 H40-A B3-AC220/230/240A-3 FI H TF	217579
4000A	NKA63 H40-A B3-AC220/240/41.5TF	217578
4000A	NKA63 H40-A B3-AC220/240/41.5ATF	282813
4000A	NKA63 H40-A B3-AC220/240/41.5A-3 FI H TF	217579
4000A	NKA63 H40-F B3-AC220/230/240ATF	329039

NKA-6300 Withdrawable 4P

Rated Current	Description	Code
4000A	NKA63 H40-A B4-AC220/230/240TF	217575
4000A	NKA63 H40-A B4-AC220/240/41.5TF	217576
4000A	NKA63 H40-H B4-AC220/230/240ATF	329046
4000A	NKA63 H40-A B4-AC220/230/240TF	217575
4000A	NKA63 H40-A B4-AC220/230/240ATF	282809
4000A	NKA63 H40-A B4-AC220/240/41.5TF	217576
4000A	NKA63 H40-A B4-AC220/240/41.5ATF	282810
4000A	NKA63 H40-F B4-AC220/230/240ATF	329043
4000A	NKA63 H40-A B4-AC220/230/240TF	217575
4000A	NKA63 H40-A B4-AC220/240/41.5TF	217576
4000A	NKA63 H40-H B4-AC220/230/240ATF	329047
4000A	NKA63 H40-A B4-AC220/230/240TF	217575
4000A	NKA63 H40-A B4-AC220/230/240ATF	282813
4000A	NKA63 H40-A B4-AC220/240/41.5TF	217576
4000A	NKA63 H40-A B4-AC220/240/41.5ATF	282814
4000A	NKA63 H40-A B4-BC220TF	329045
4000A	NKA63 H40-F B4-AC220/230/240ATF	329048




Our Solutions include

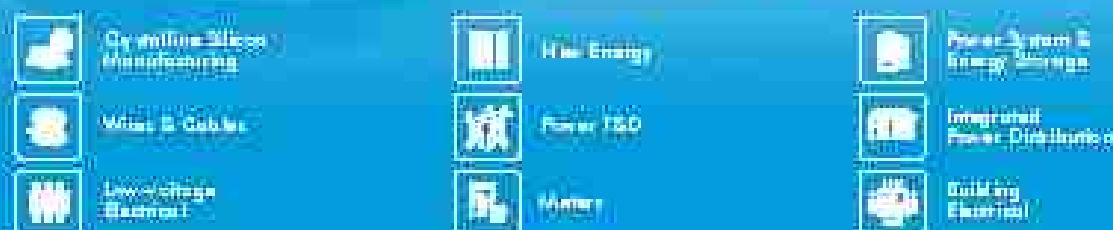

CHINT was established in 1984. Over the years, thanks to our rapid development, CHINT has become the world's leading provider of intelligent energy solution for the entire industrial chain, offering the most comprehensive range of products, from Plug to Plug. In 2022, our annual sales revenue exceeded 22.1 billion dollars, with total assets surpassing 25 billion dollars.

Over three decades of global expansion, our business network has grown to cover more than 140 countries and regions worldwide. We operate in various areas including low-voltage power transmission and distribution, water, gas and electricity metering, and green energy sector such as solar. CHINT employs more than 30,000 people worldwide, creating over 200,000 jobs in the supply chain.

Through the integration of business and continuous upgrading, CHINT Global has further established its supply chain. This market localization has also enabled us to adopt flexible business models such as smart operation and maintenance, financing, and other integrated technical services for the global market.

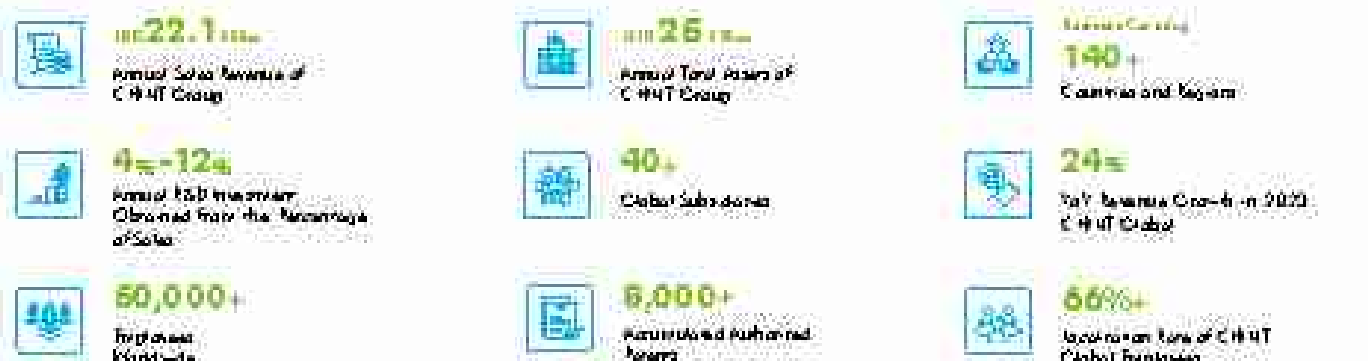

ABOUT CHINT LOW VOLTAGE

Zhejiang CHINT Electrical Co., Ltd. is a wholly owned subsidiary of CHINT Group. Cultivating R&D, manufacturing a vast array of low-voltage products, we provide system solutions for building, power supply, housing, HVAC, telecommunication and other industrial customers. For nearly 40 years since its founding, CHINT Electrical has provided reliable products and services to over 140 countries and regions. Today, CHINT has grown to be one of the world's renowned low-voltage brands.

CHINT Honors

2022

- ISO 26001 standard of good behavior certificate
- "Global Partnering" and "Country along the Belt and Road" in the "2021 Best Practices for Realizing the Sustainable Development Goals" (CDI Impact Leading Enterprise)

2021

- No. 1 in "China's Top 100 Private Enterprises in Social Responsibility" in 2021
- For 8 consecutive years, CHINT has won the title champion of "Top 100 in electrical and hardware industry"
- No. 92 in "2021 China's Top 300 Private Enterprises"
- No. 244 in "2021 Top 300 Chinese Enterprises"
- The intelligent manufacturing factory of low-voltage electrical appliances was selected as the national "2021 Intelligent Manufacturing Demonstration Factory"

2020

- CHINT was selected in the 2020 Zhejiang Province "Future Factory" regional list under the label "Intelligent Leading Game Factory"
- The low-voltage technology of CHINT won the second prize of China Electric Power Science and Technology
- CHINT's smartly was selected as the smart PV demonstration enterprise list of the Ministry of Industry and Information Technology and won the honor of "Influential PV cell module brand", "Influential PV IBC / End User", "Influential PV power station operation and maintenance brand"

2019

- National Green Factory
- National Industrial Design Center of the MIIT
- Global Top 20 PV Enterprise
- China's Top 10 Successful PV Enterprise
- Top 100 Innovative Enterprises in Zhejiang Province
- Technology innovation system was ranked the 2019 Science and Technology Progress Award in Zhejiang

Qualification Certification

The products have been accredited through China Compulsory Certification (CCC) as well as UL of US, CE of EU, VDE and TÜV of Germany, BSI of Netherlands, RCM of Australia, SABS of South Africa and other international product certifications.



GLOBAL OPERATION LOCALIZATION

Rooted locally. Serving the Globe



Sunlight Singapore & Malaysia
Main Products: Low-voltage Switchgear



Watering Factory Uganda
Main Products: Water



Solar Factory Thailand
Main Products: PV Module, PV Cell




Sunlight Vietnam
Main Products: VSI, MCC, SBL, DLI, CU, Fire Pump Panel, Weatherproof Panel, Spring Cartridge Box, Solar Switchboard




Schweitzer CHINT Cambodia
Main Products: MV Equipment including 22kV Distribution Transformer, Switchgear, Smar, RCU, Capacitor Bank



CHINT - EOBMAC Egypt
Main Products: Full Series of low-voltage Switchgear

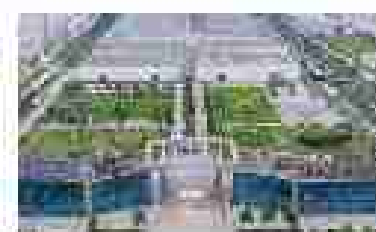


Maining Solar Intelligent Factory China
Main Products: PV Module, PV Cell

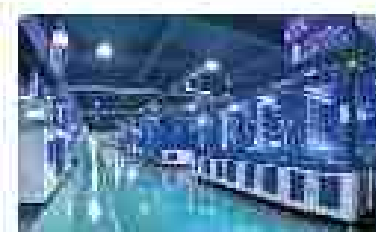

Wenzhou Low-voltage Intelligent Factory China
Main Products: Low-voltage Components



Power T&D Jinding Factory China
Main Products: MV and HV Switchgear, C-GIS, MV Circuit Breaker, Air-Breaker Substation

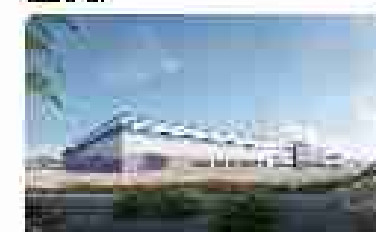

CHINT ATC Saudi Arabia
Main Products: MV and HV Intelligent Power T&D Products of 22kV and below



Power T&D Shengqi Factory China
Main Products: Power Transformer, GIS, MV and HV Switchgear, ACSS, HV Circuit Breaker, Disconnector



CHINT-AULAN & Oree Saudi Arabia
Main Products: Low-voltage Components

Market Coverage
140+
Covered Regions

Global Subsidiaries
40+

Global Distributors
2,300+

Localization Rate of Global Employees
66%+

After more than 30 years of overseas expansion, CHINT Global has subsidiaries and offices in Europe, North America, Asia-Pacific, Middle East & Africa and Latin America, its business footprint covers more than 140 covered regions worldwide, continuously providing the world with more efficient smart electricity and clean energy.

Head Office: 1A, 2TH FLOOR, NEW TOWERS, 17th, JYVASKY-RAUHO,
POKKE - HANROU, FINLAND
Tel: +358 9 333 371 243
E-mail: cs@ttcom.fi cs@ttcom.com

